

FIG. 1 is a perspective view of a container assembly 10, including a container 12 and a lid 14. The container 12 includes a front wall 16, a back wall 18, and side walls 20. The lid 14 includes a front wall 22, a back wall 24, and side walls 26. The container 12 and lid 14 are shown in an open position, with the lid 14 hinged to the container 12. The container 12 includes a bottom wall 28 and a top wall 30. The lid 14 includes a bottom wall 32 and a top wall 34. The container 12 and lid 14 are shown in a perspective view, with the front wall 16 and front wall 22 being the most prominent features. The container 12 and lid 14 are shown in a perspective view, with the front wall 16 and front wall 22 being the most prominent features.

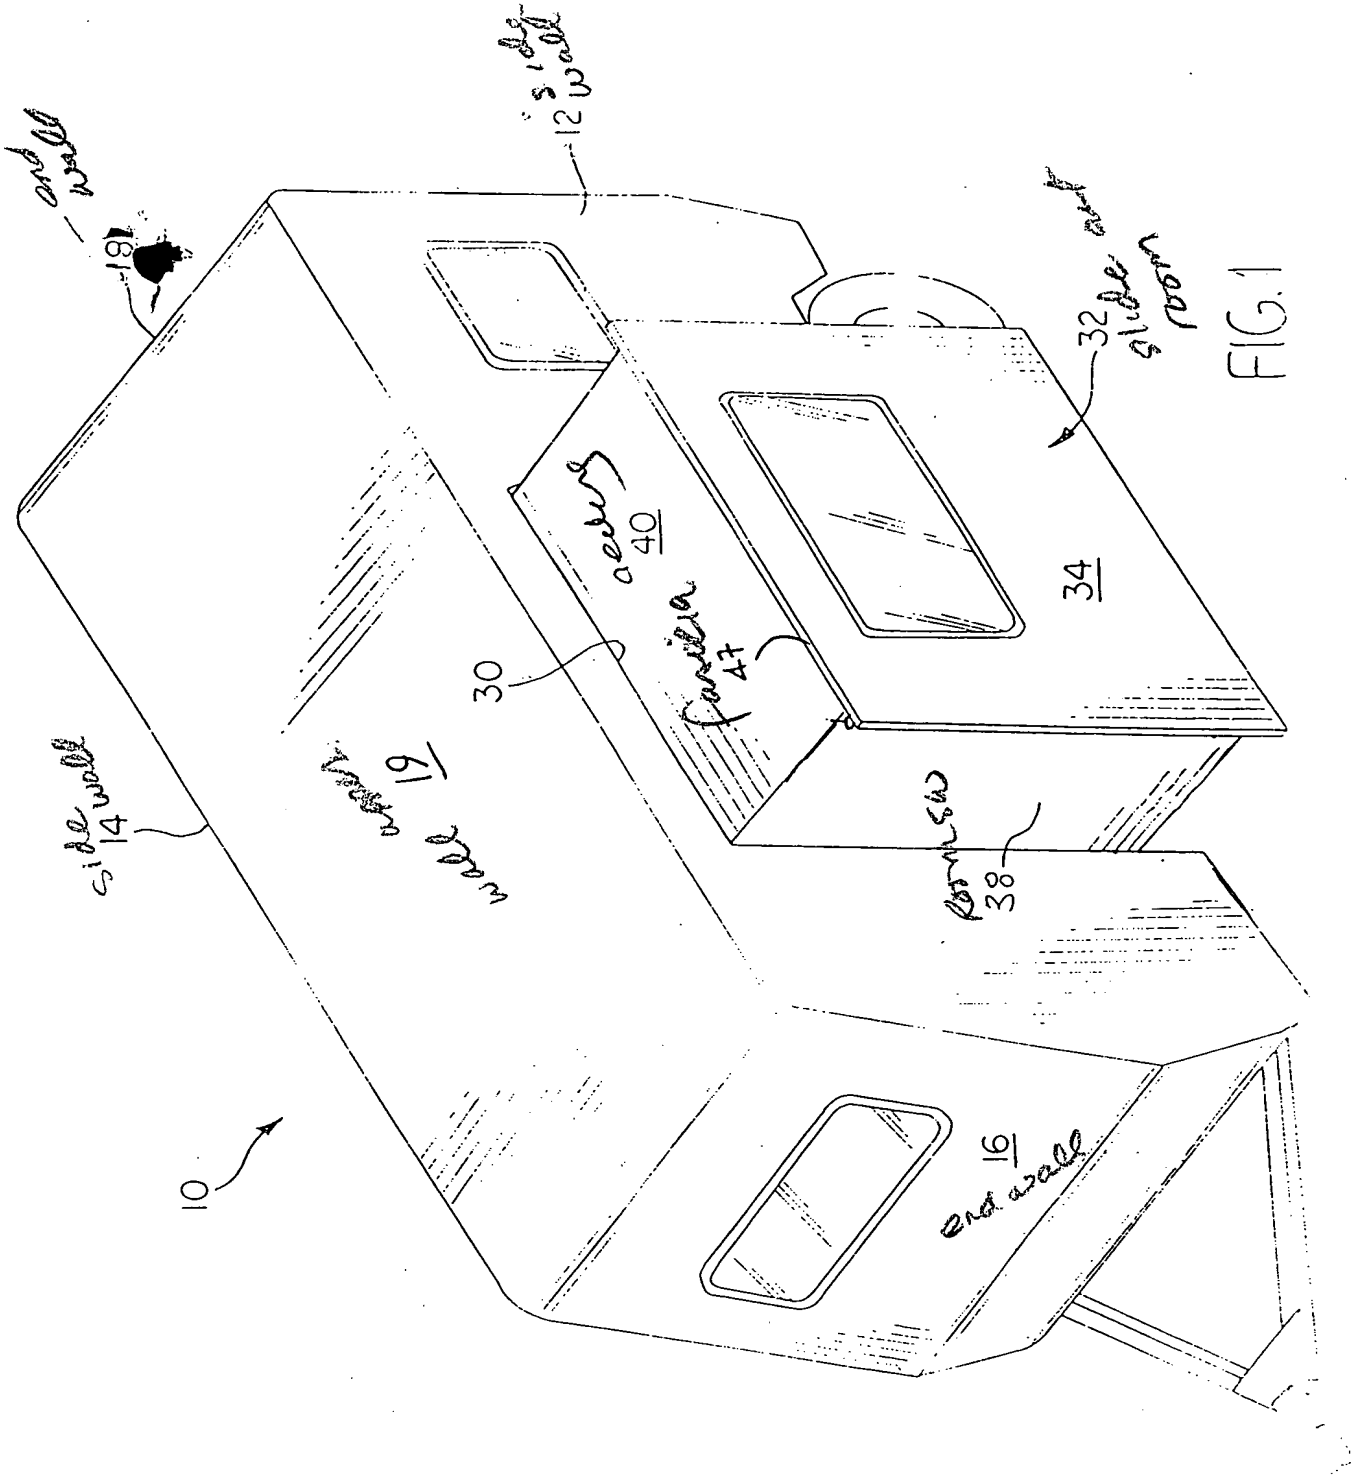


FIG. 1

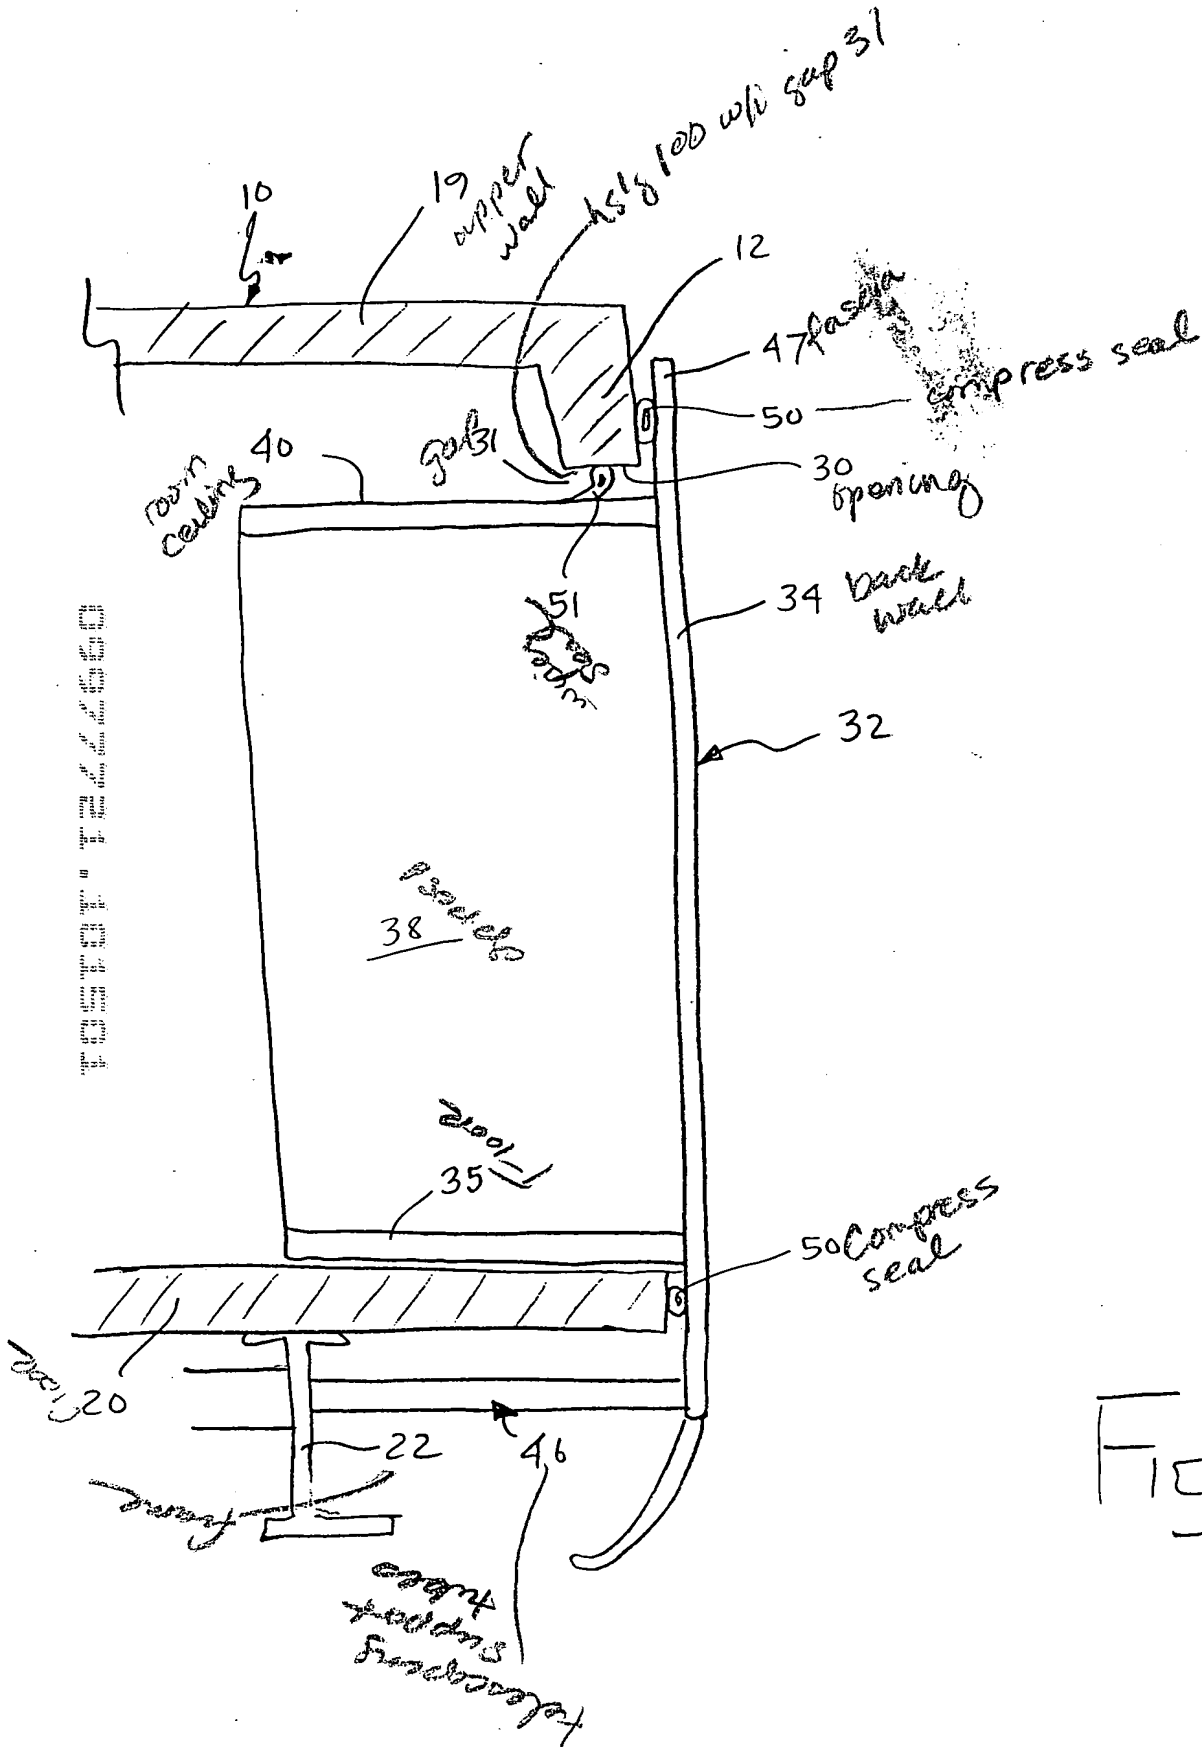


Fig. 3

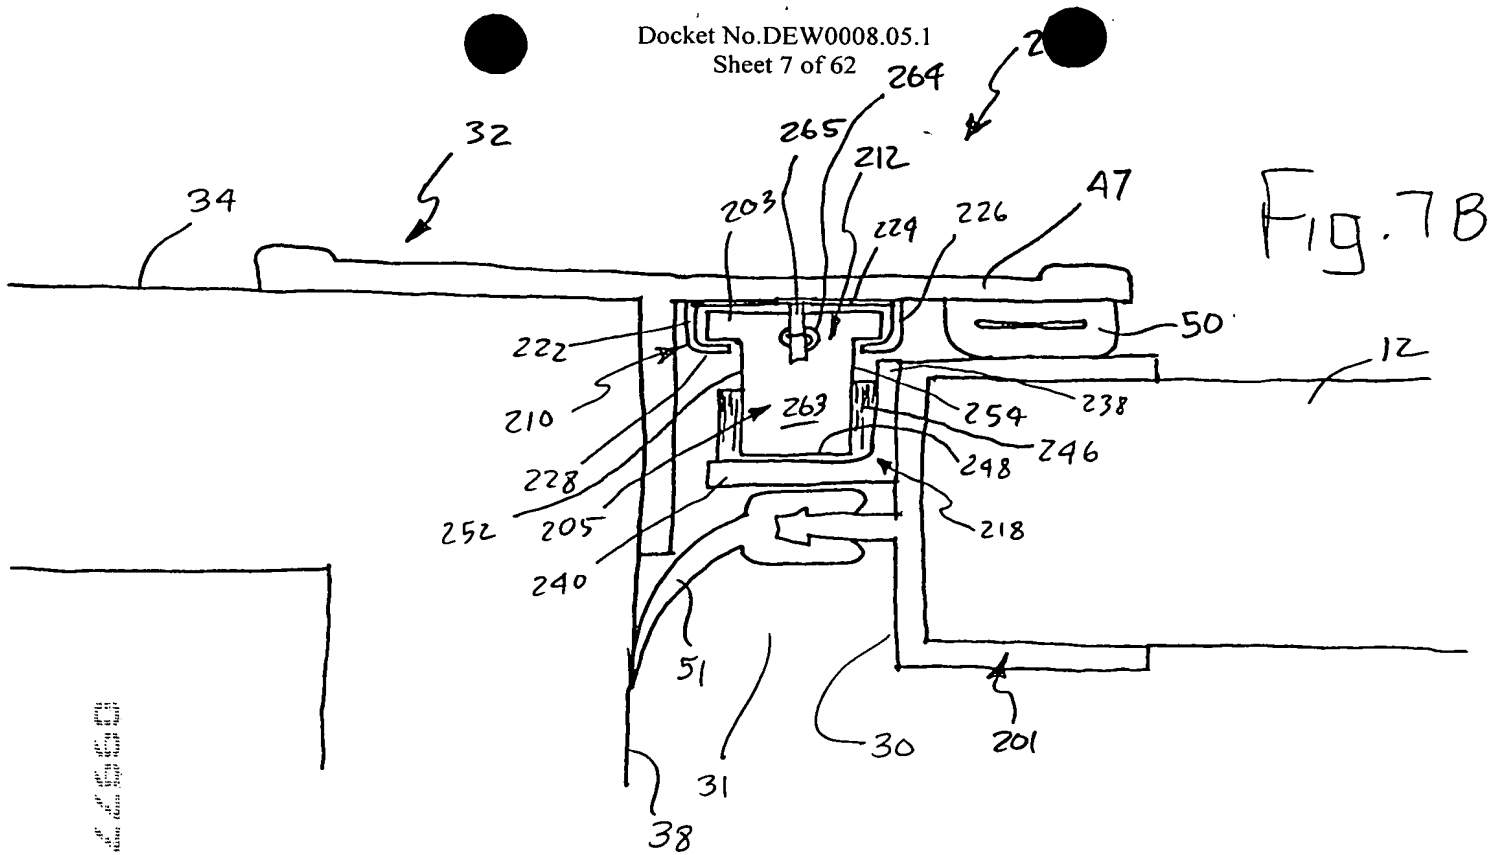


Fig. 7B

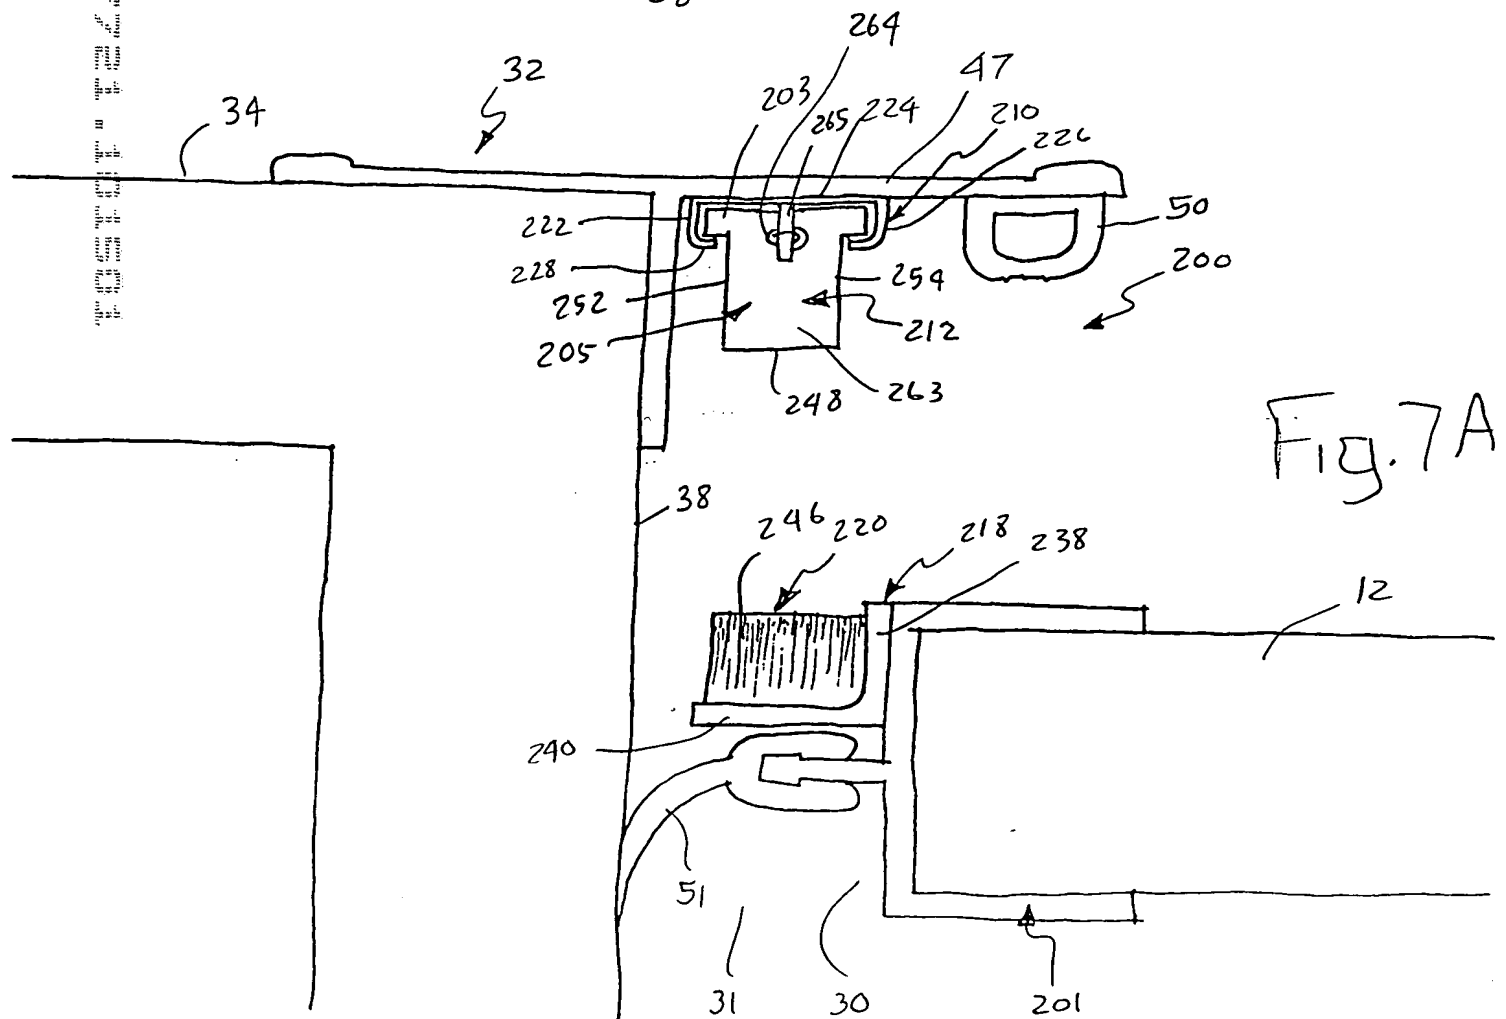


Fig. 7A

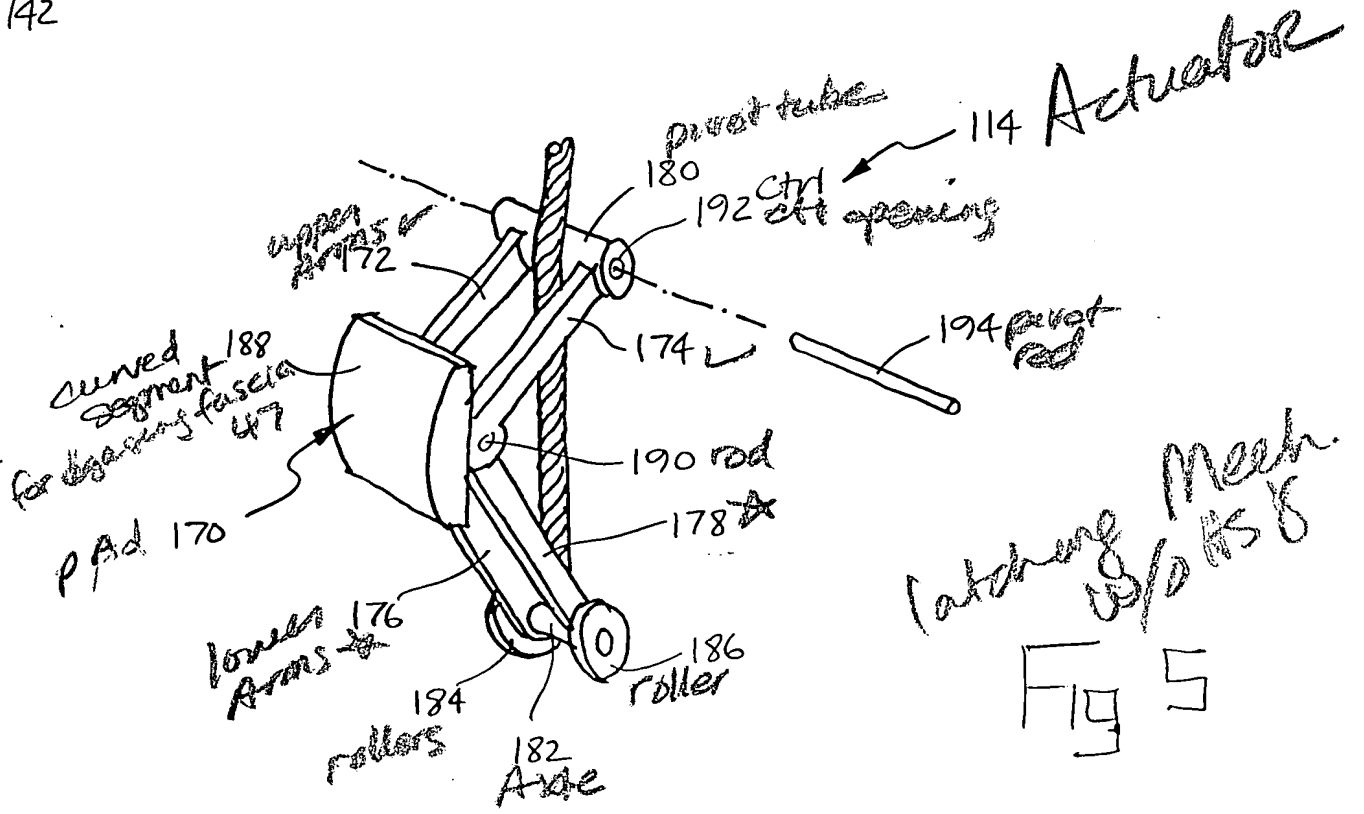
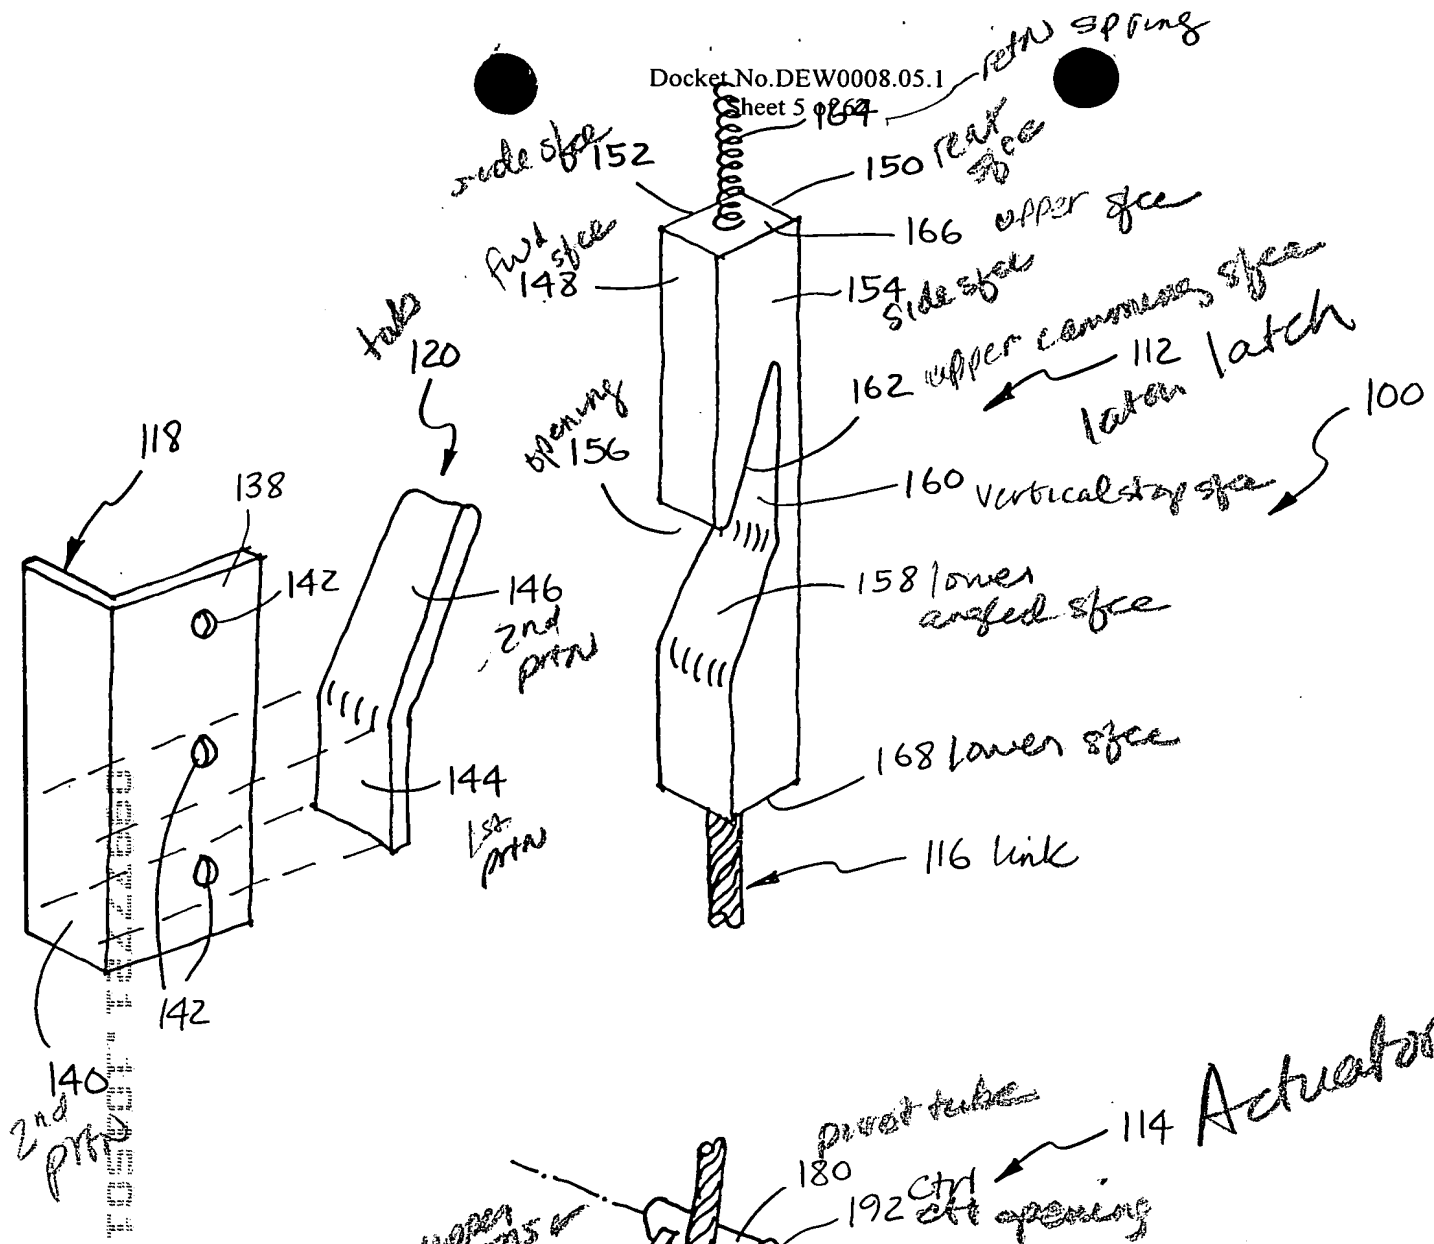


Fig 5

latching Mech. w/o RS 8

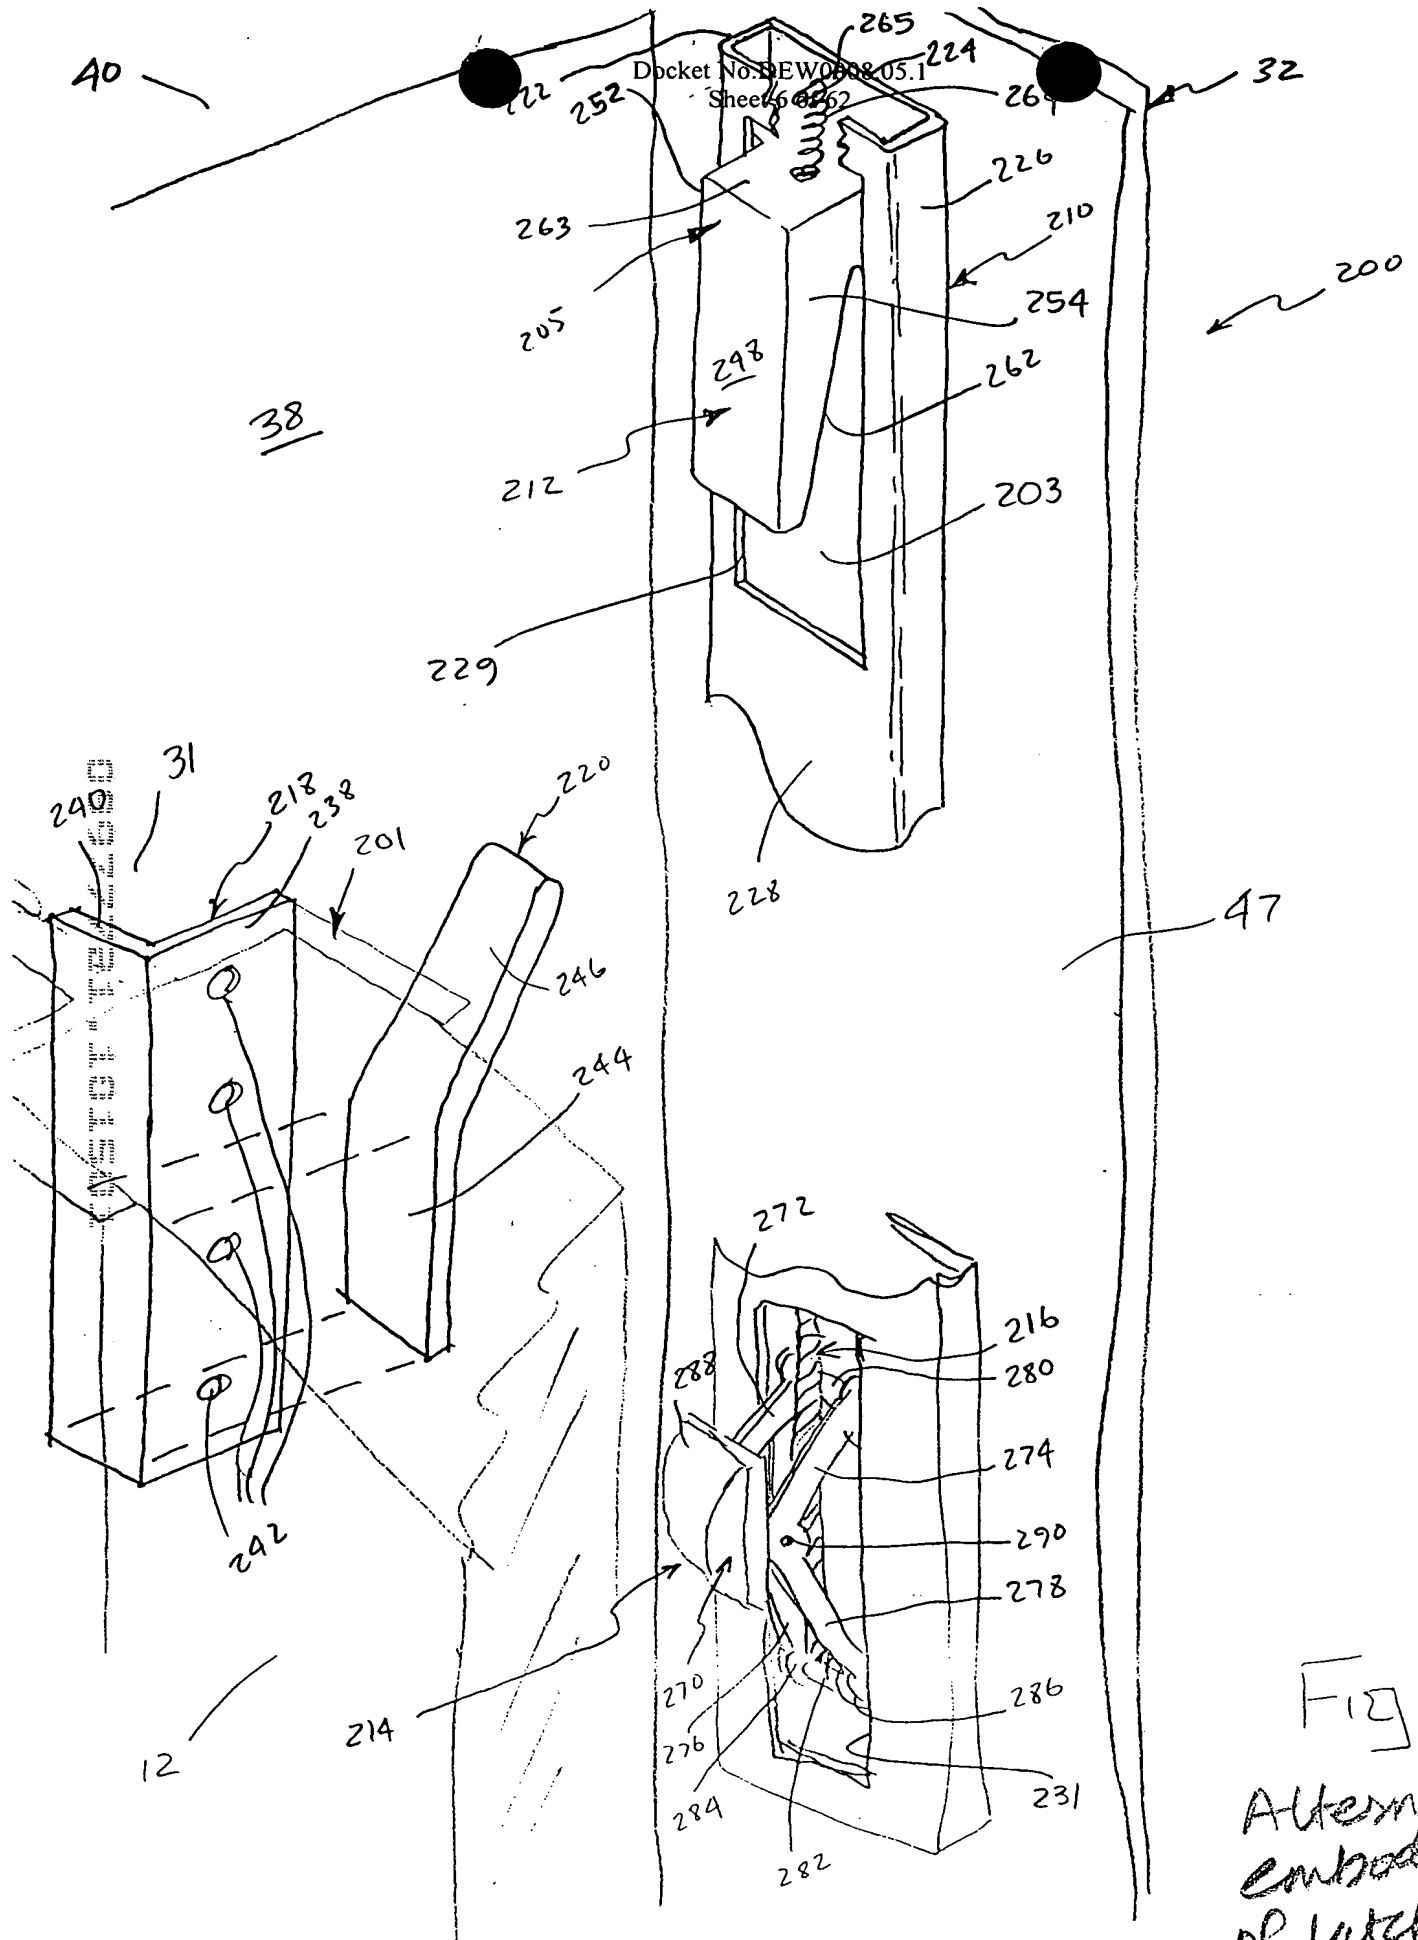


Fig. E
 Alternative
 embodiment
 of latch's
 Mech.

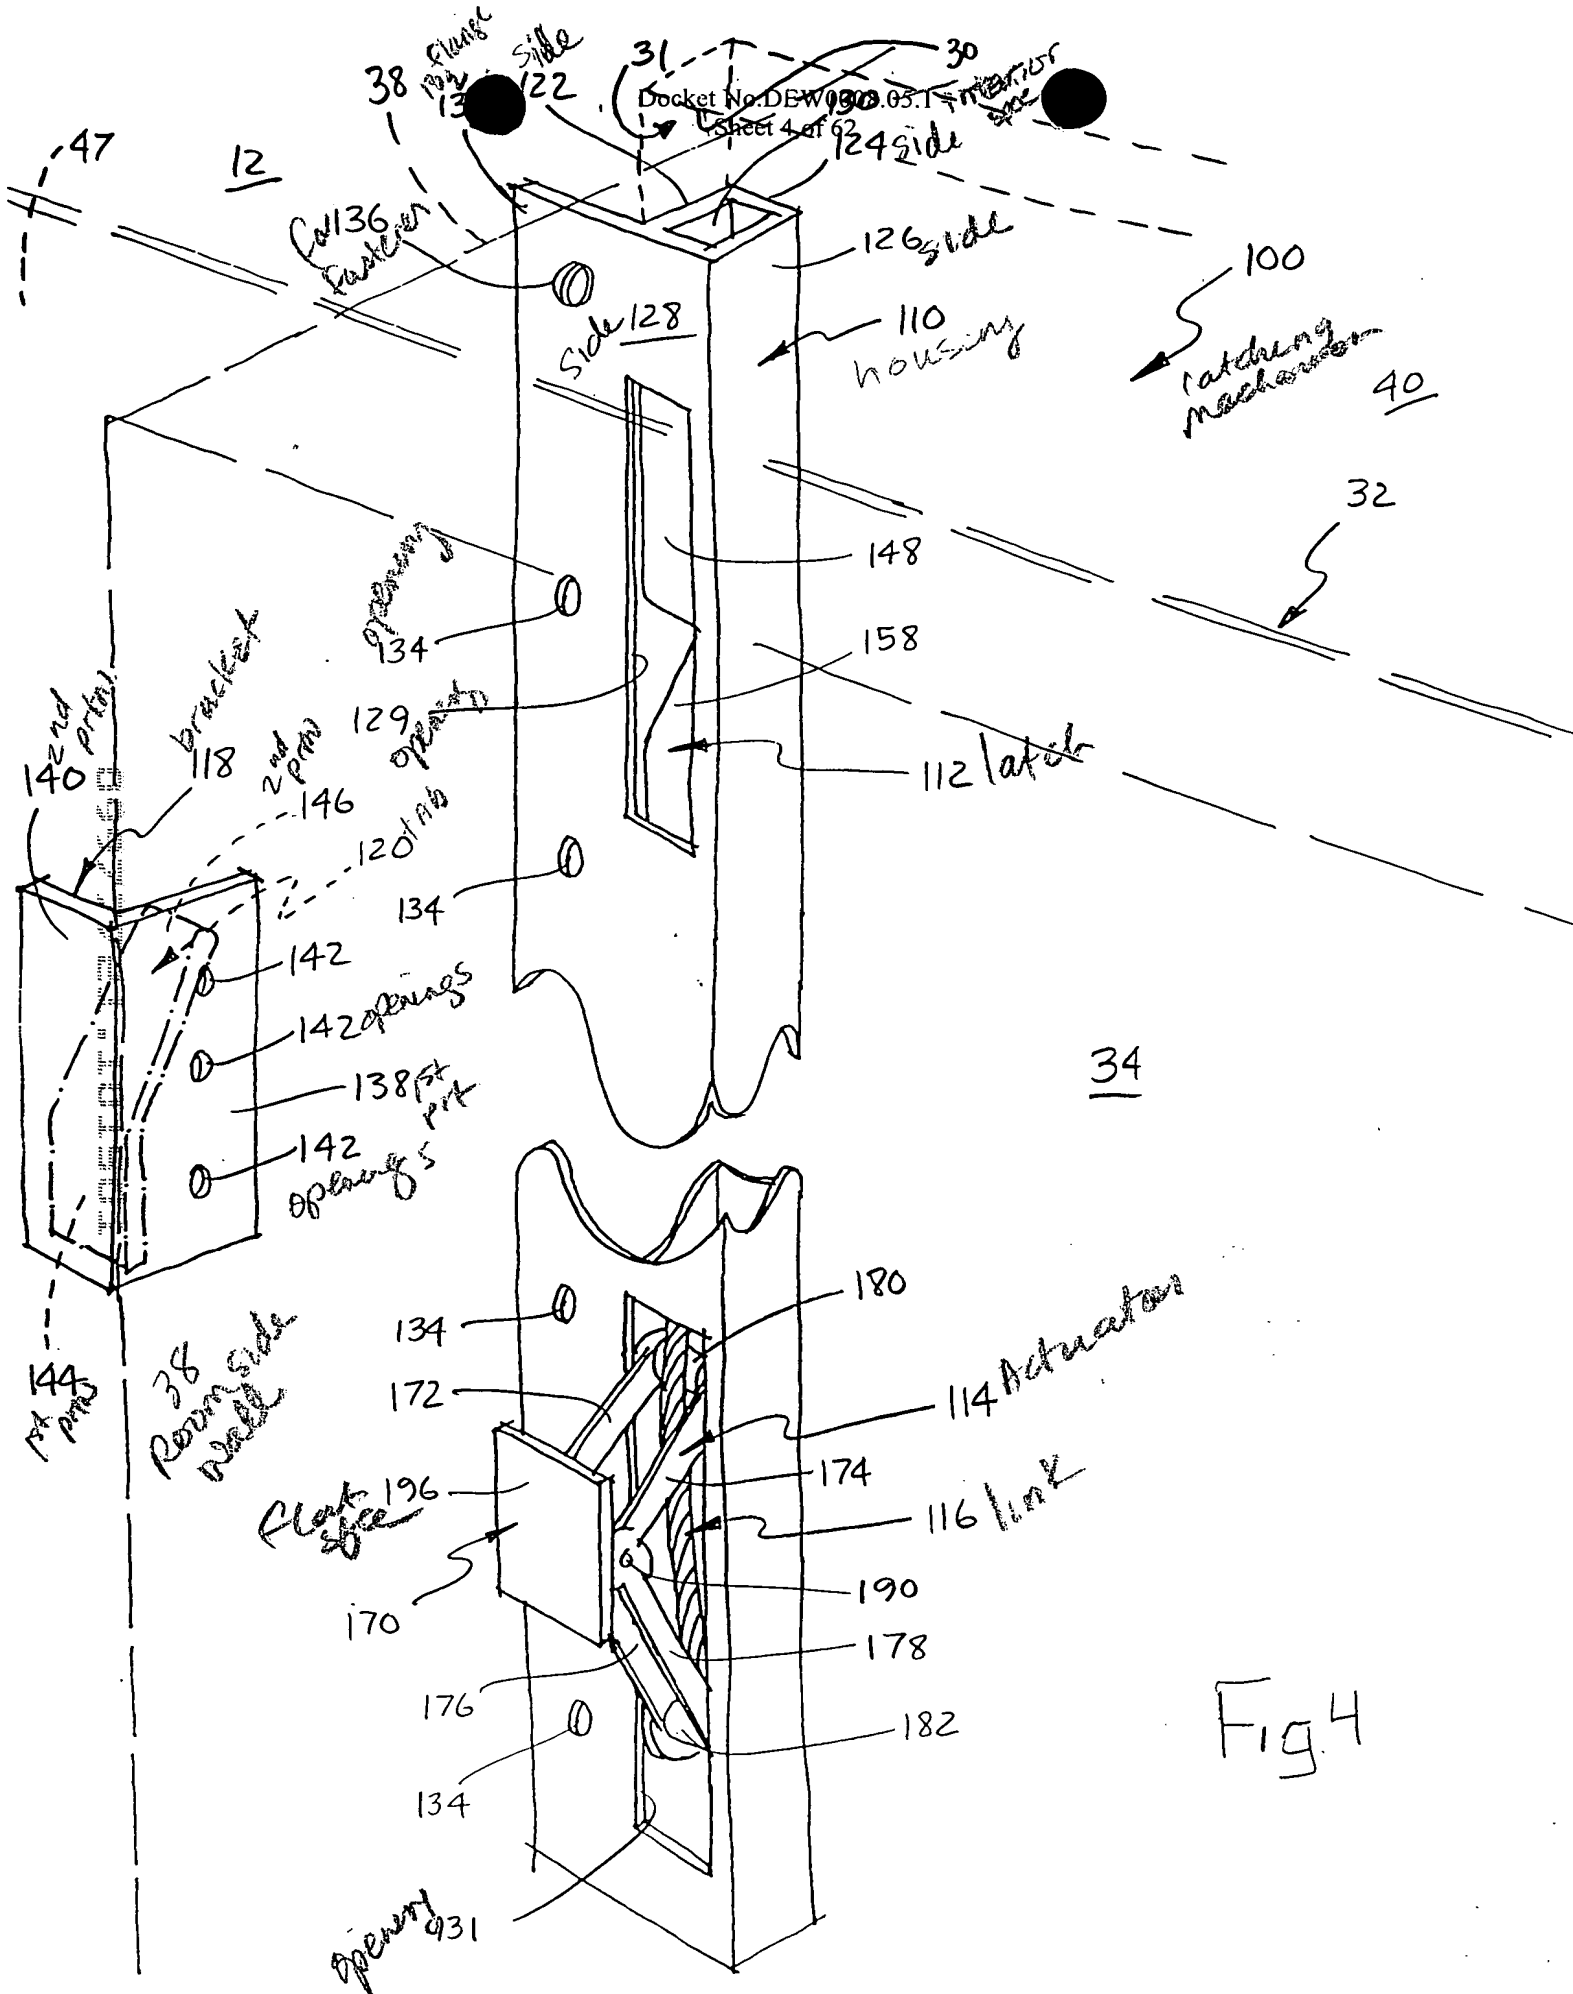


Fig. 4



FIG. 2







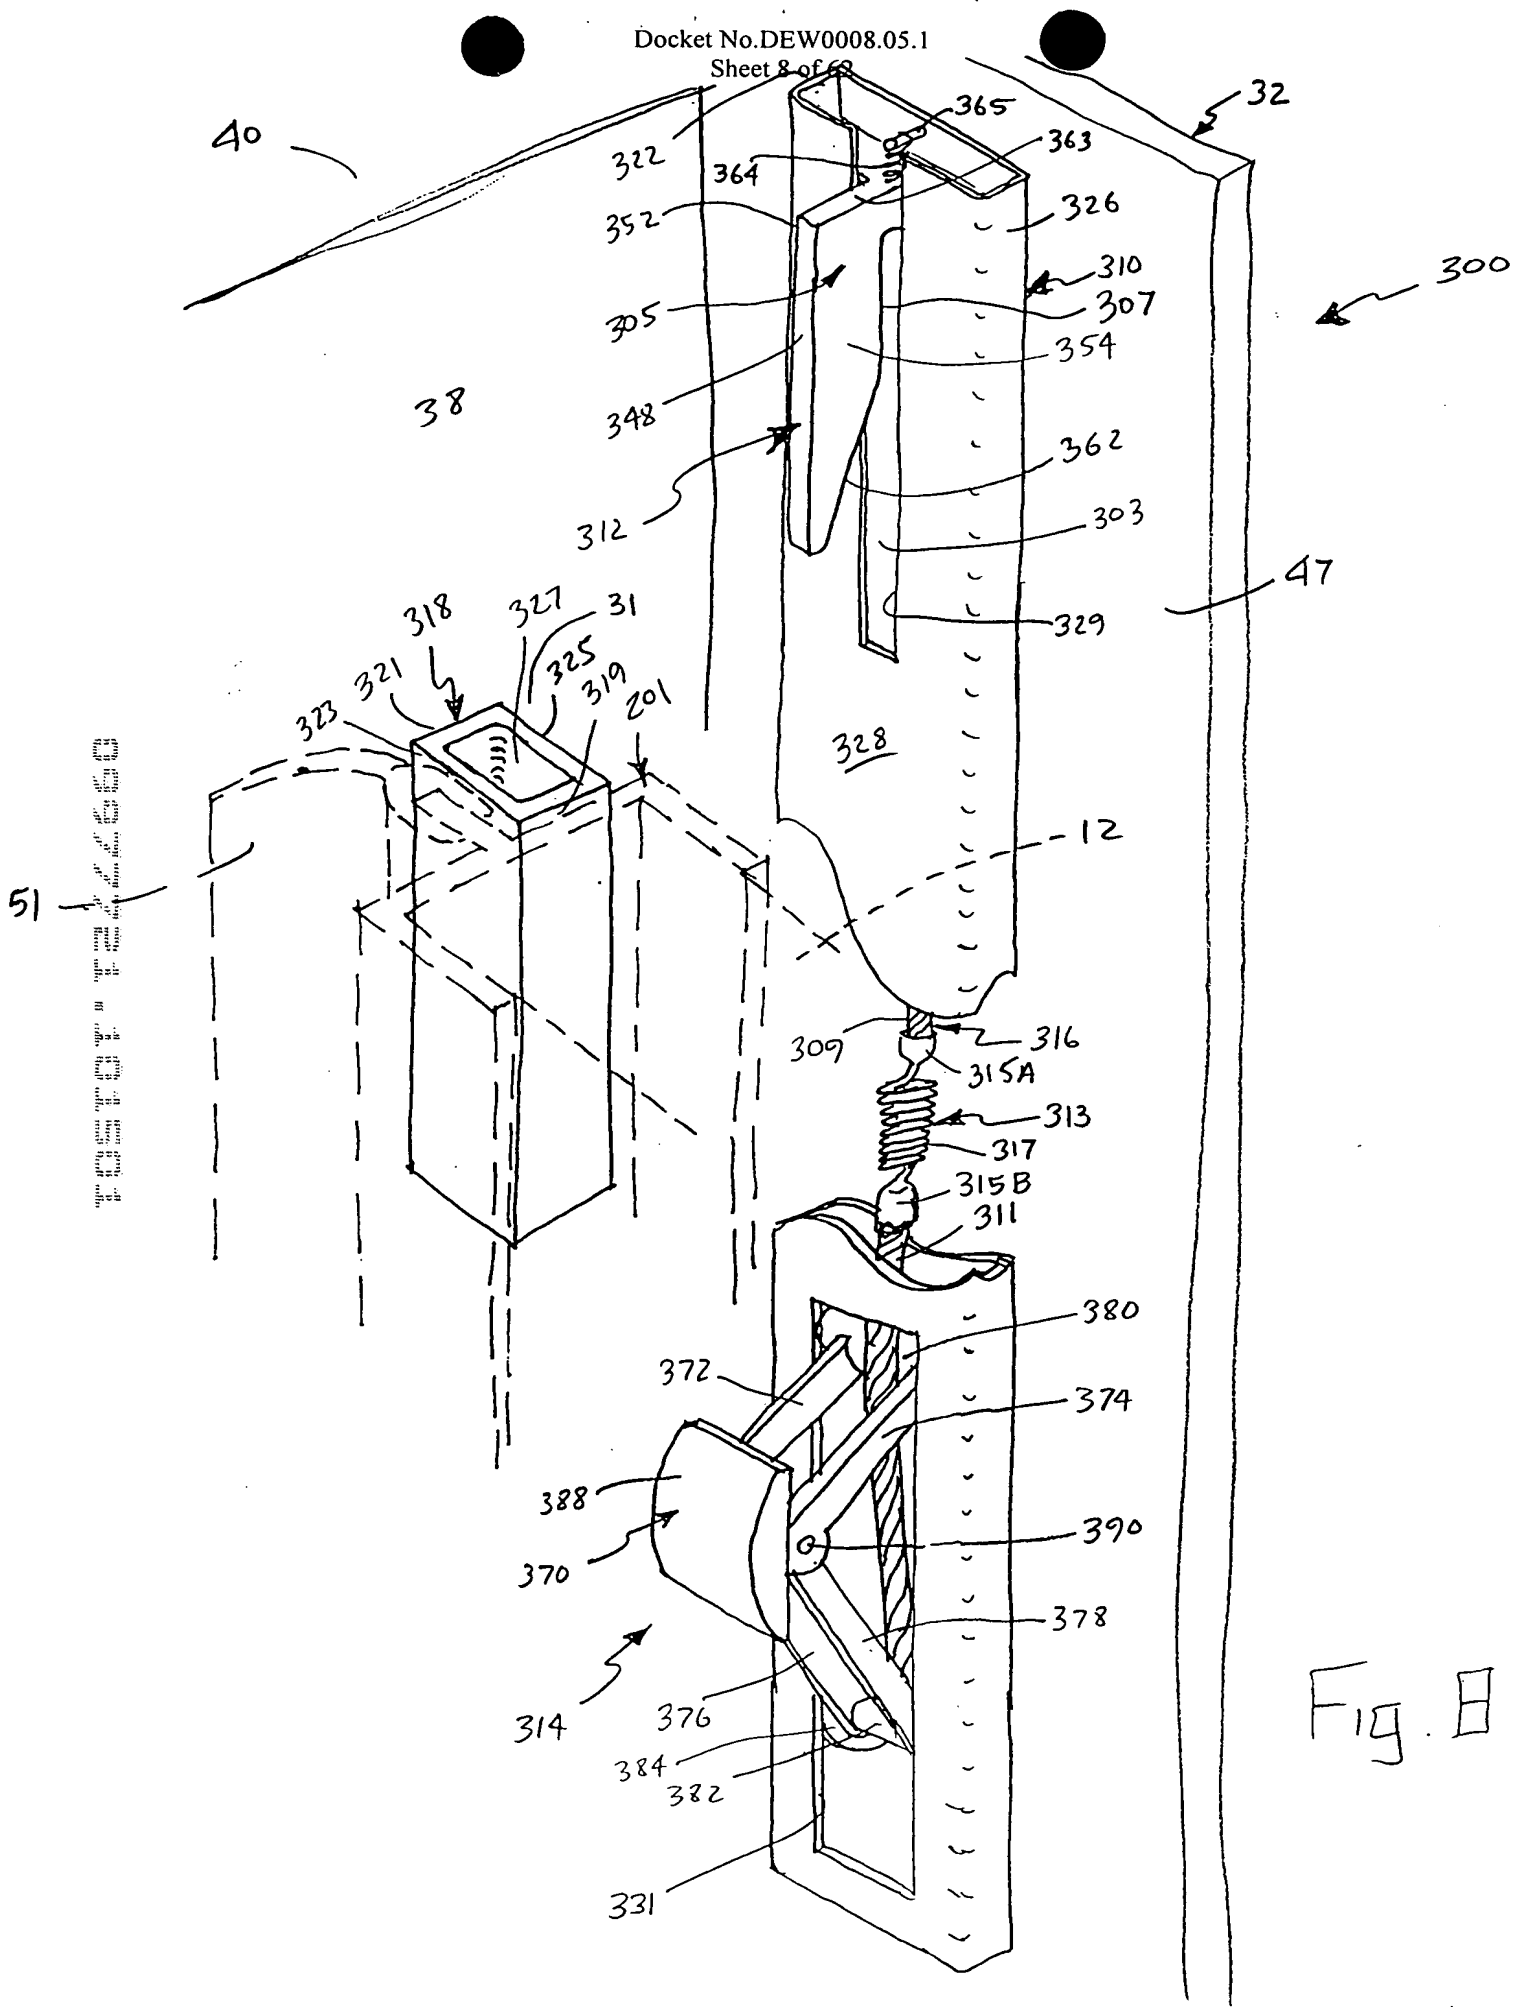




Fig. 8

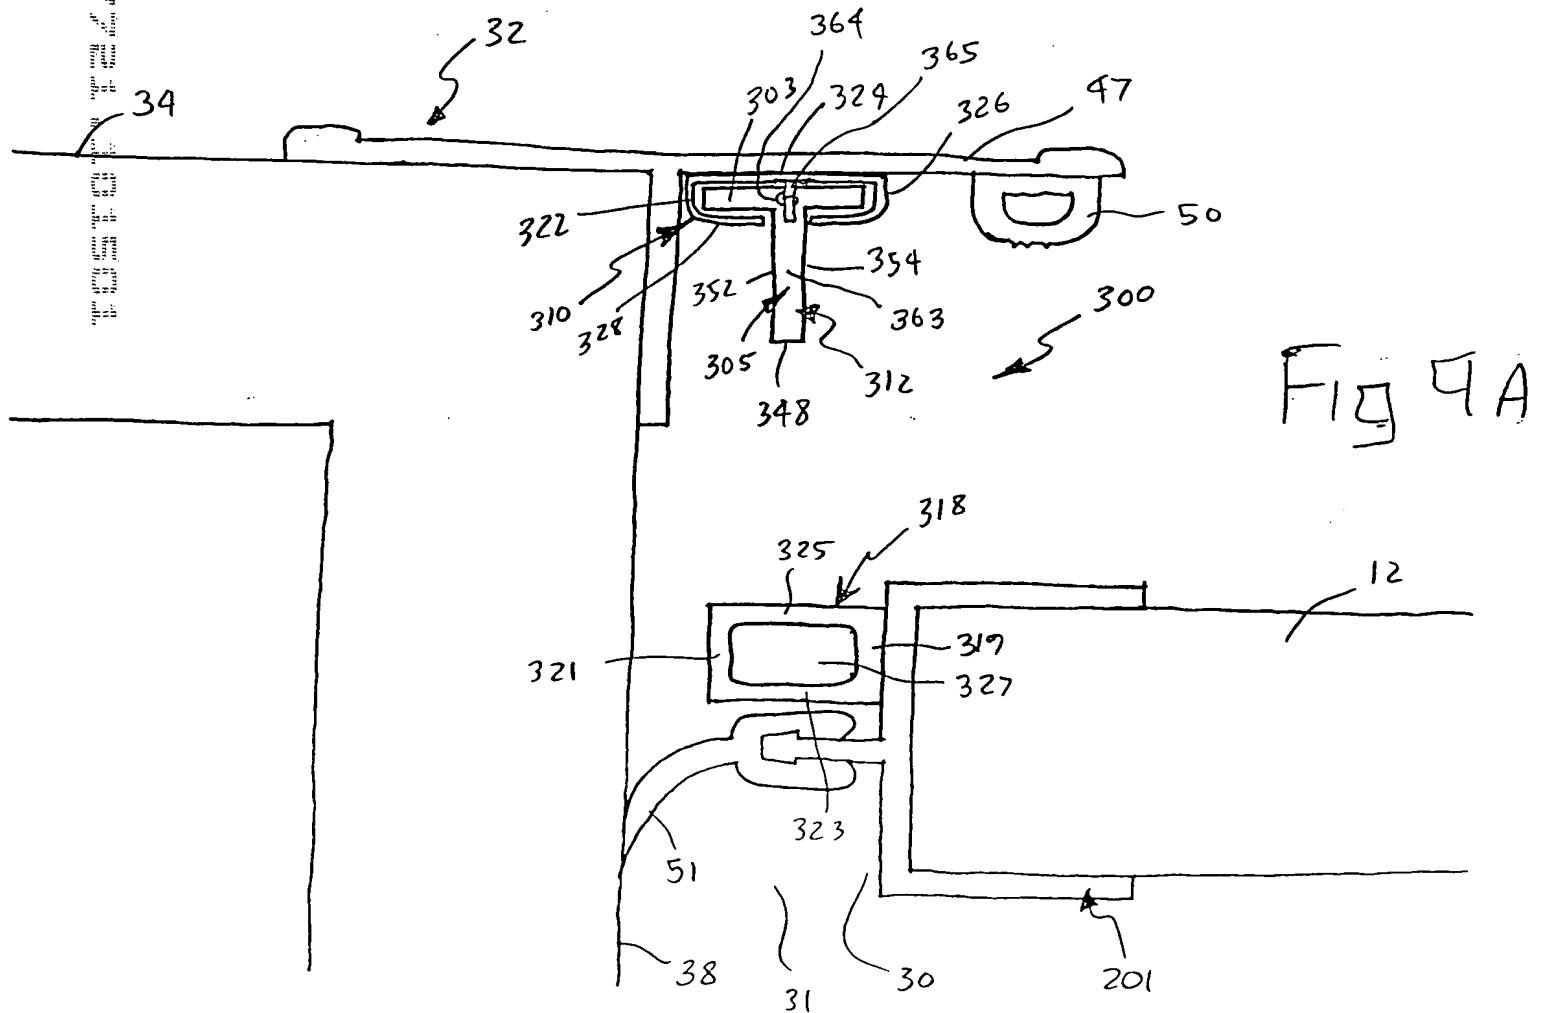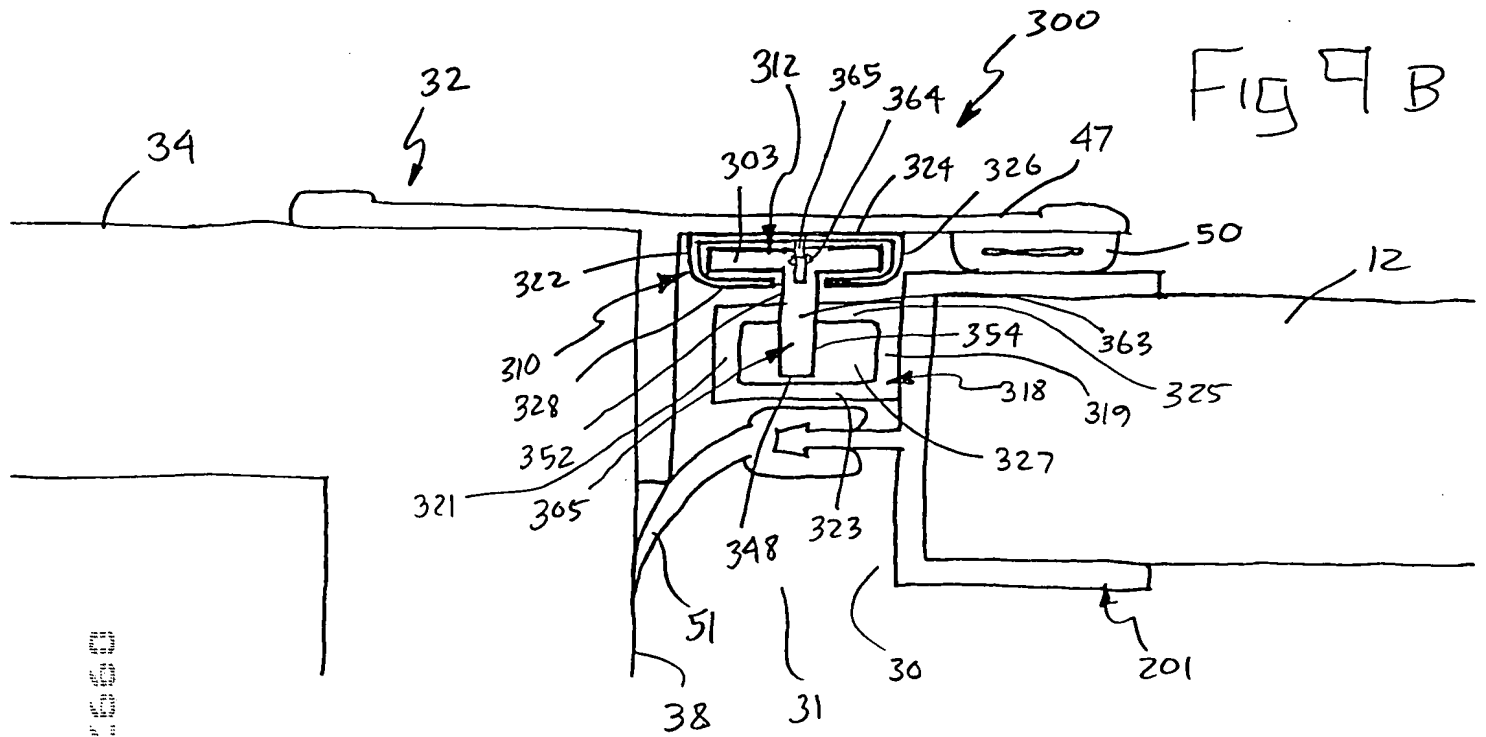

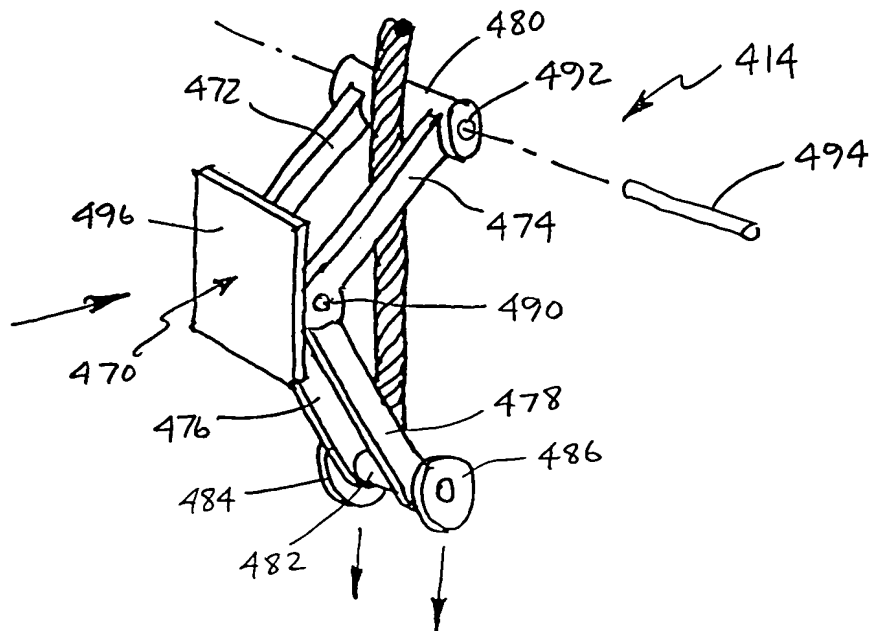



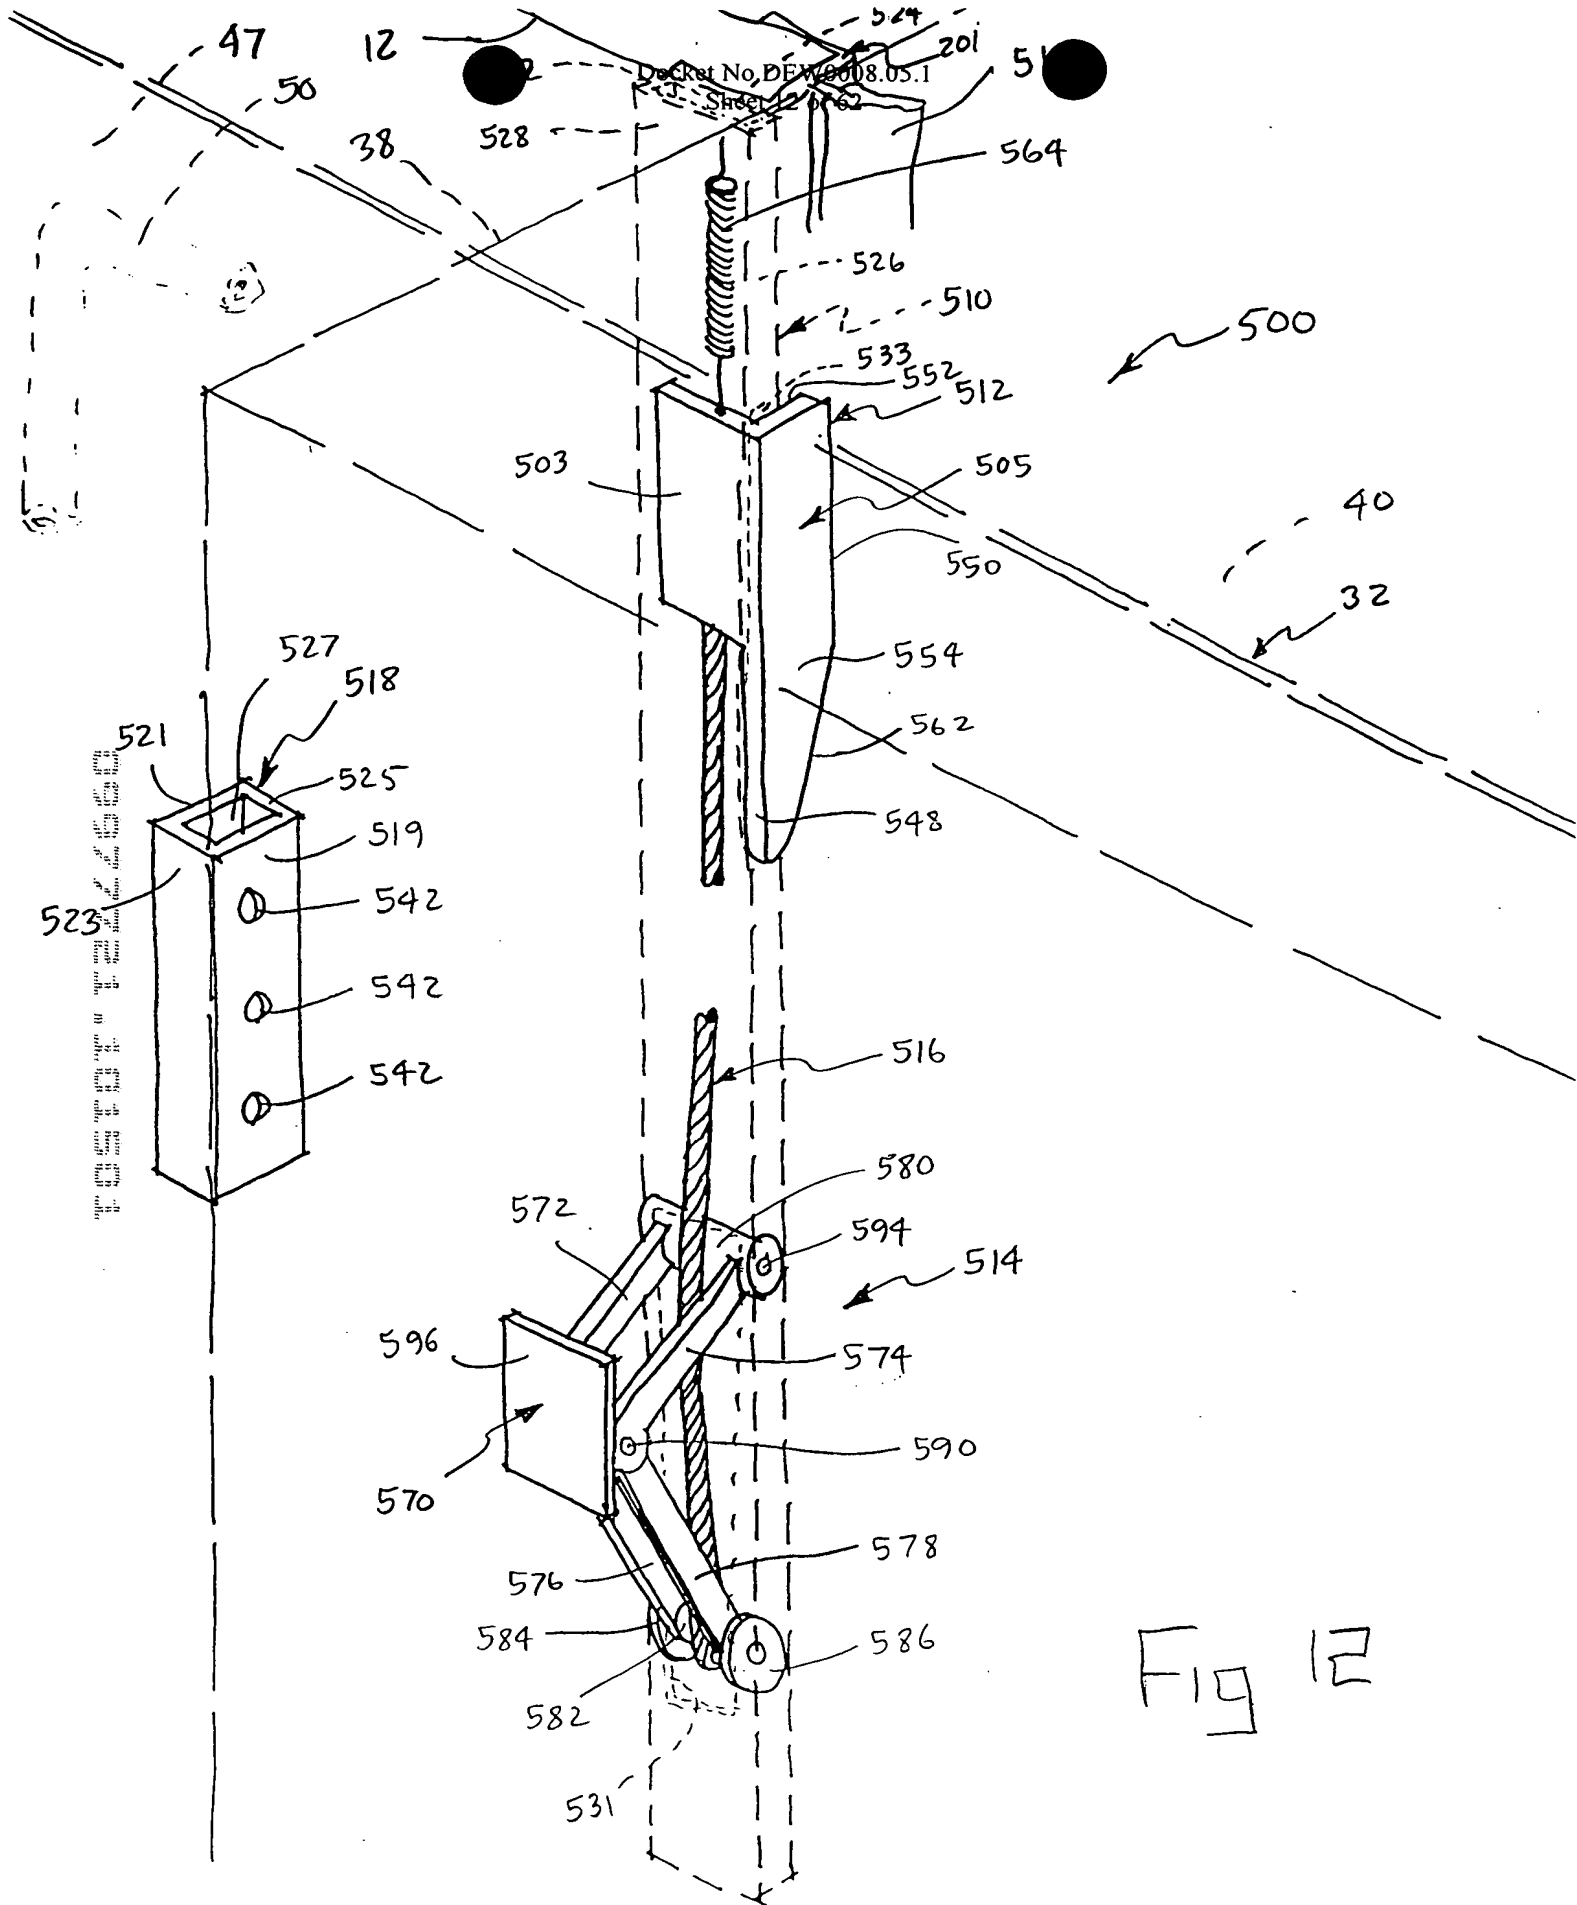

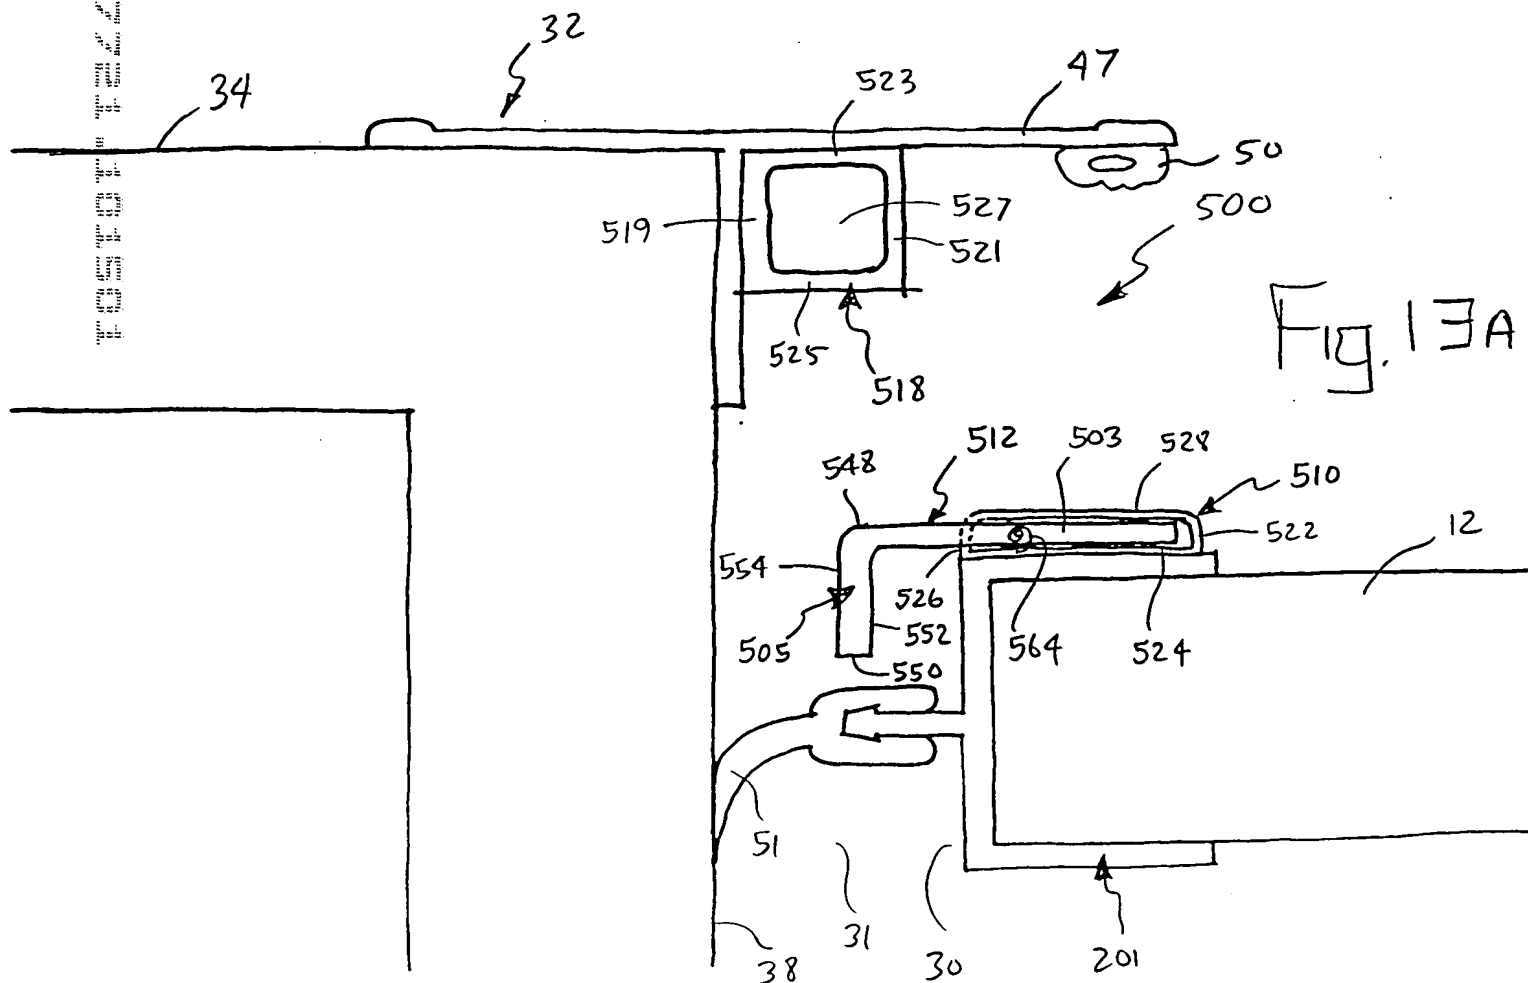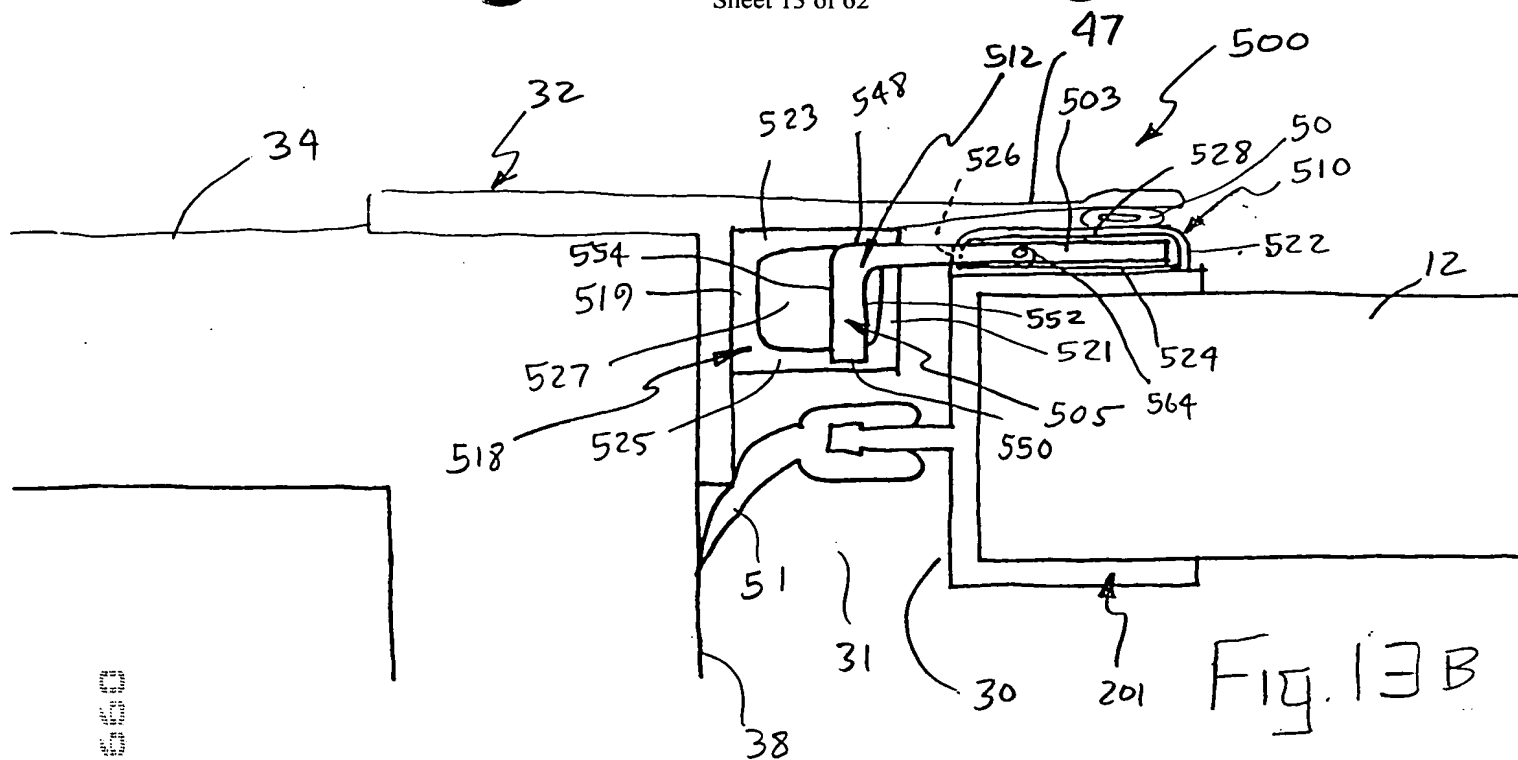

40

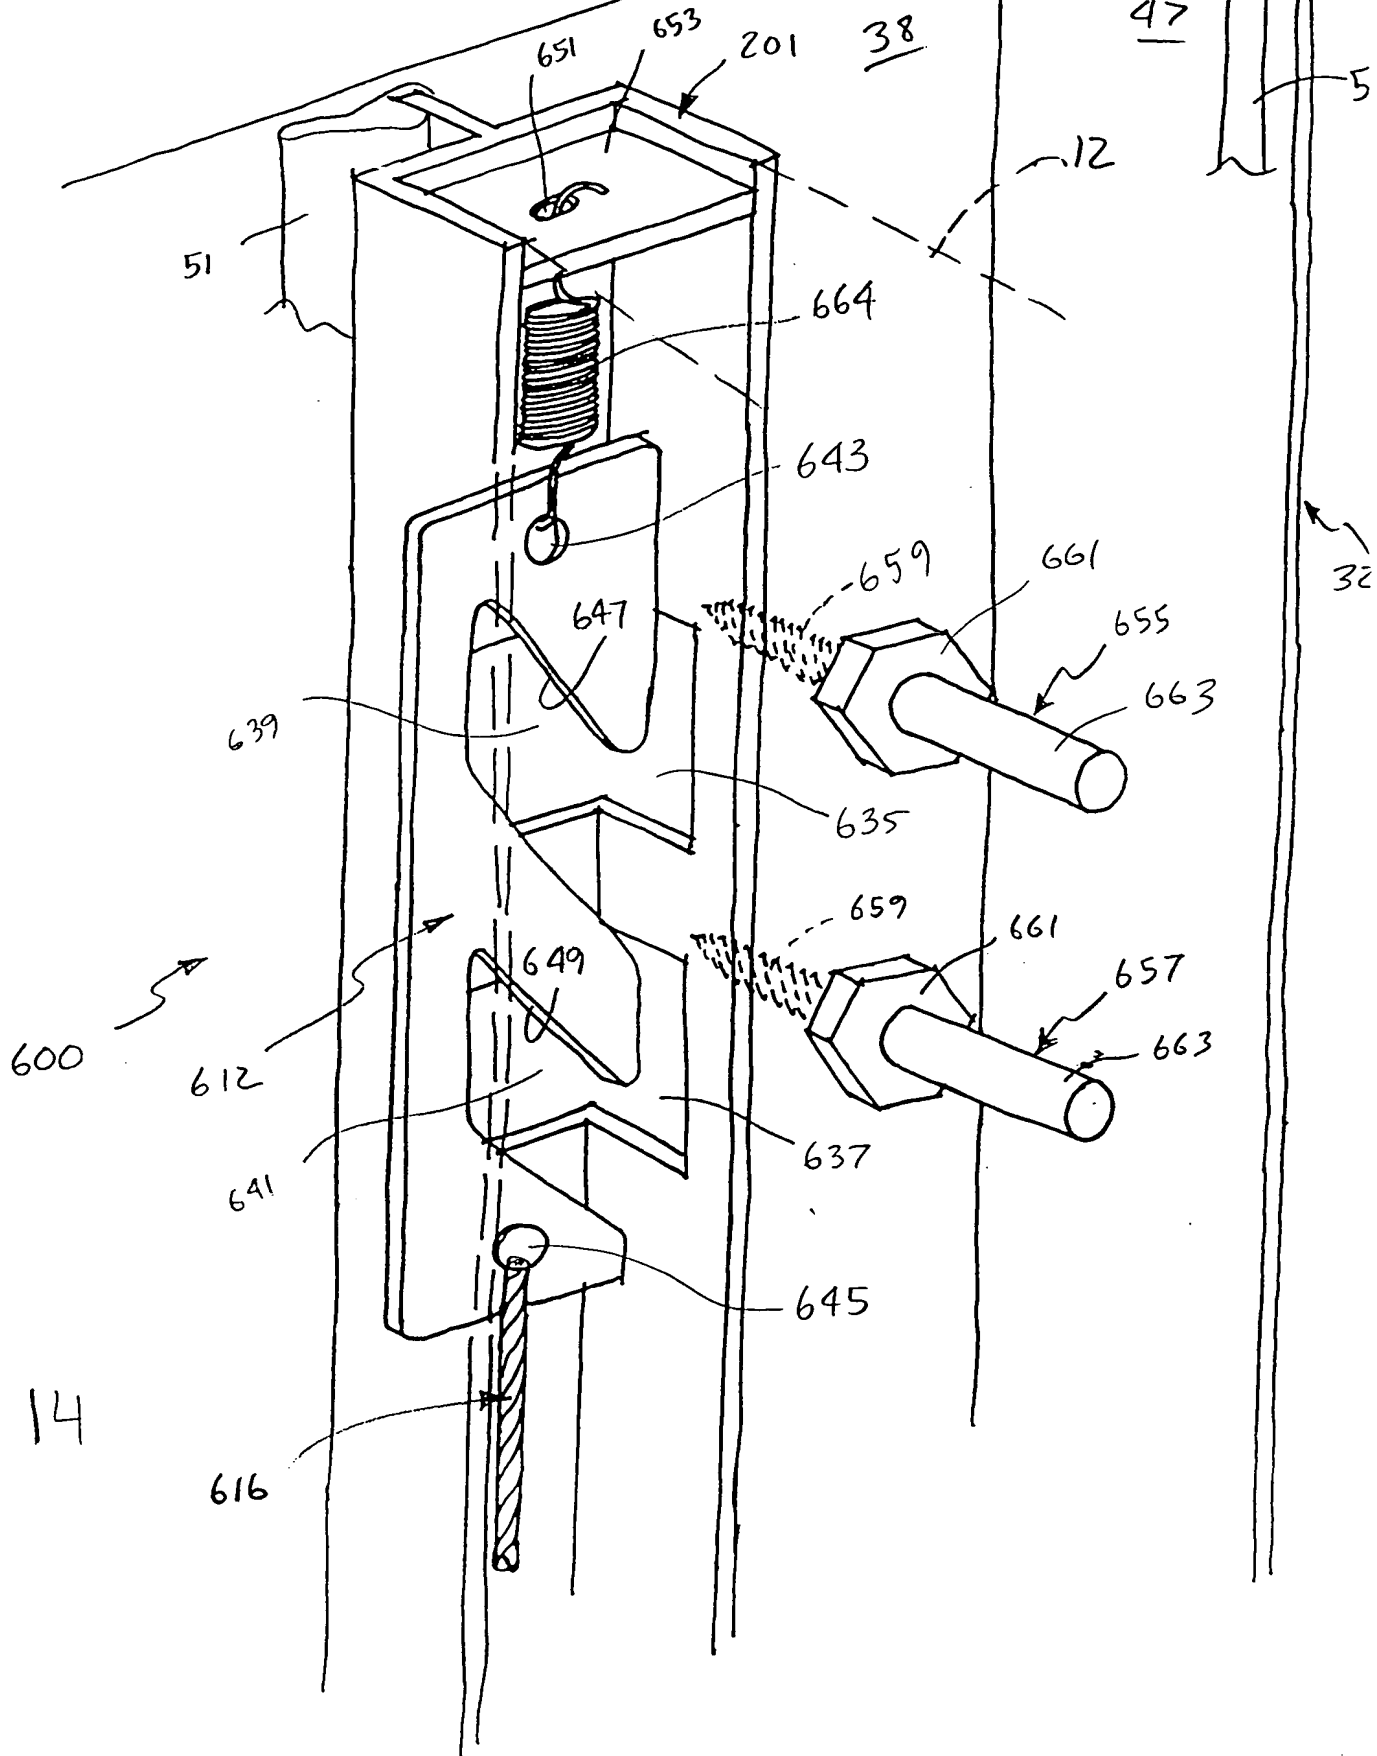
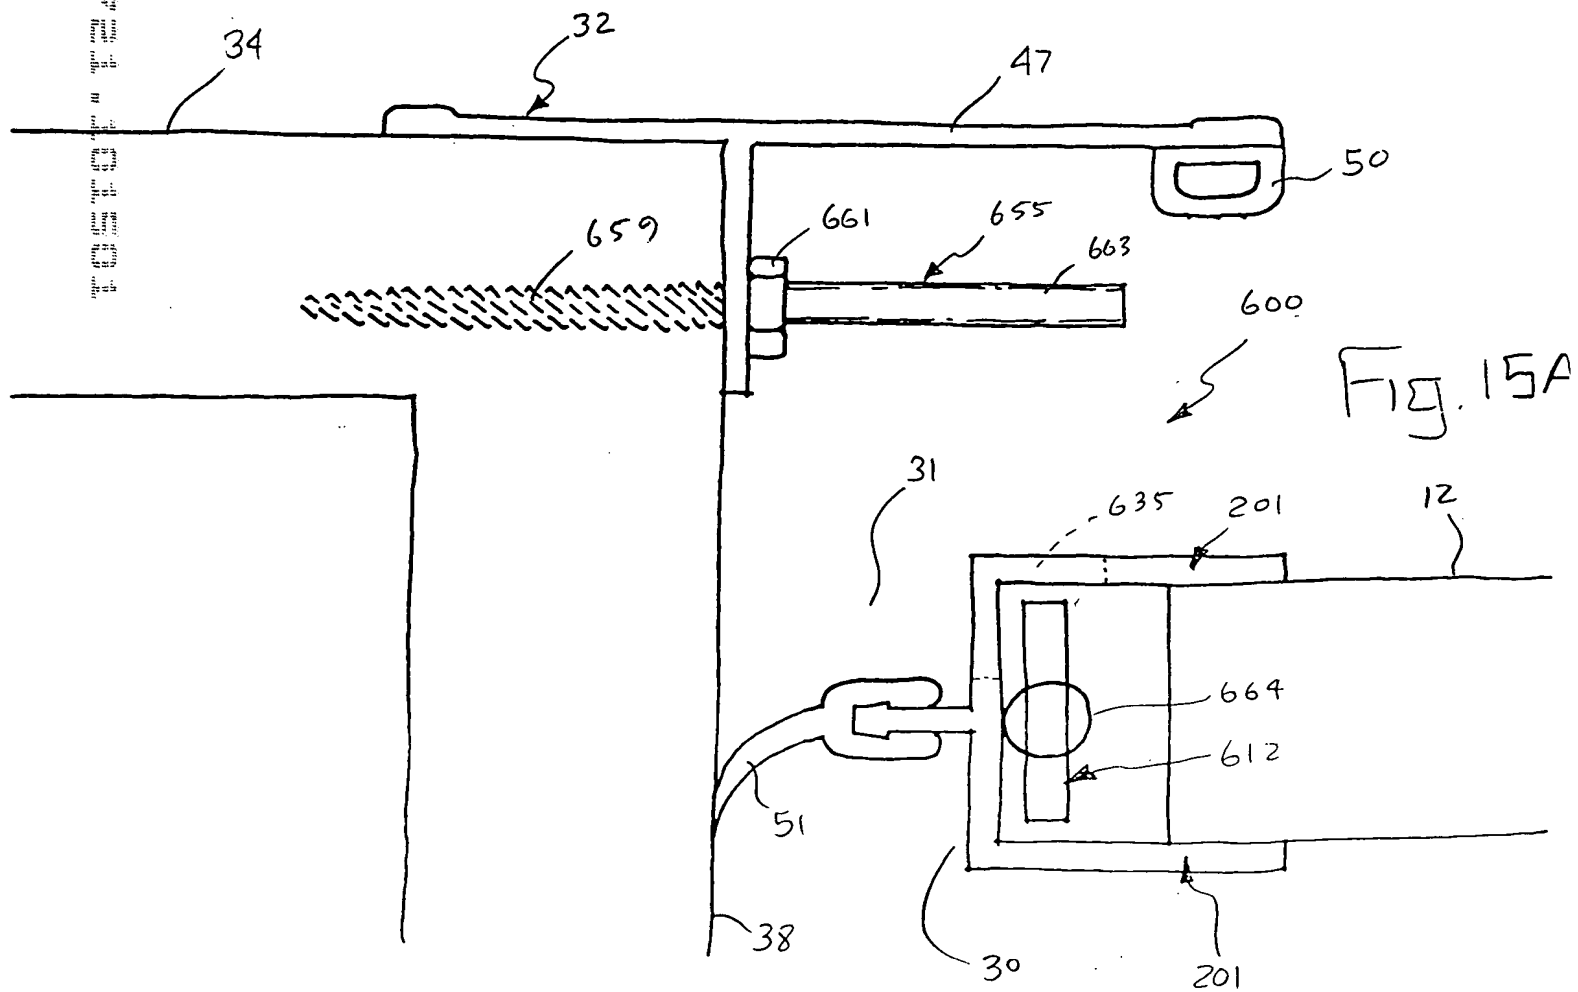
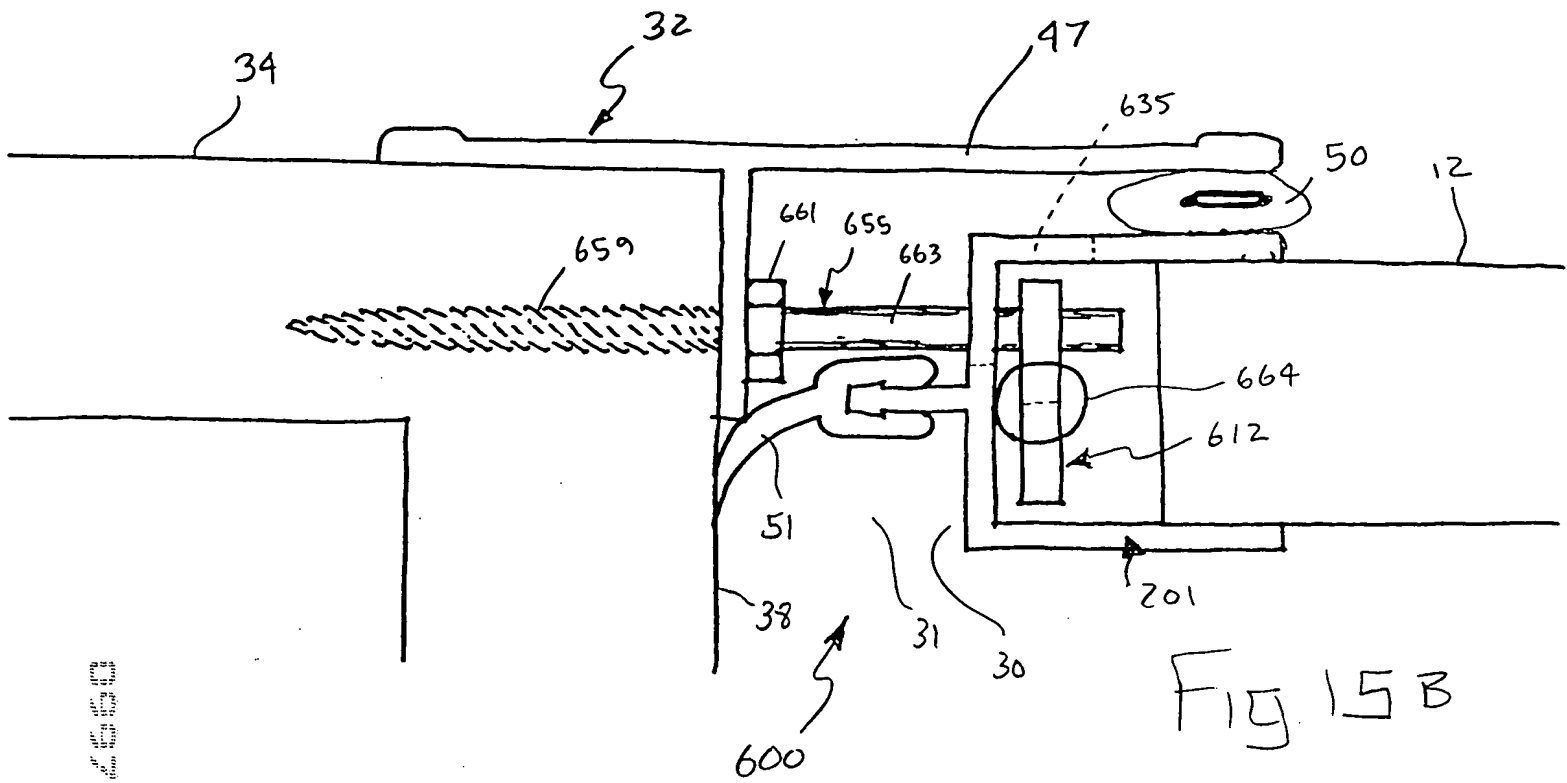
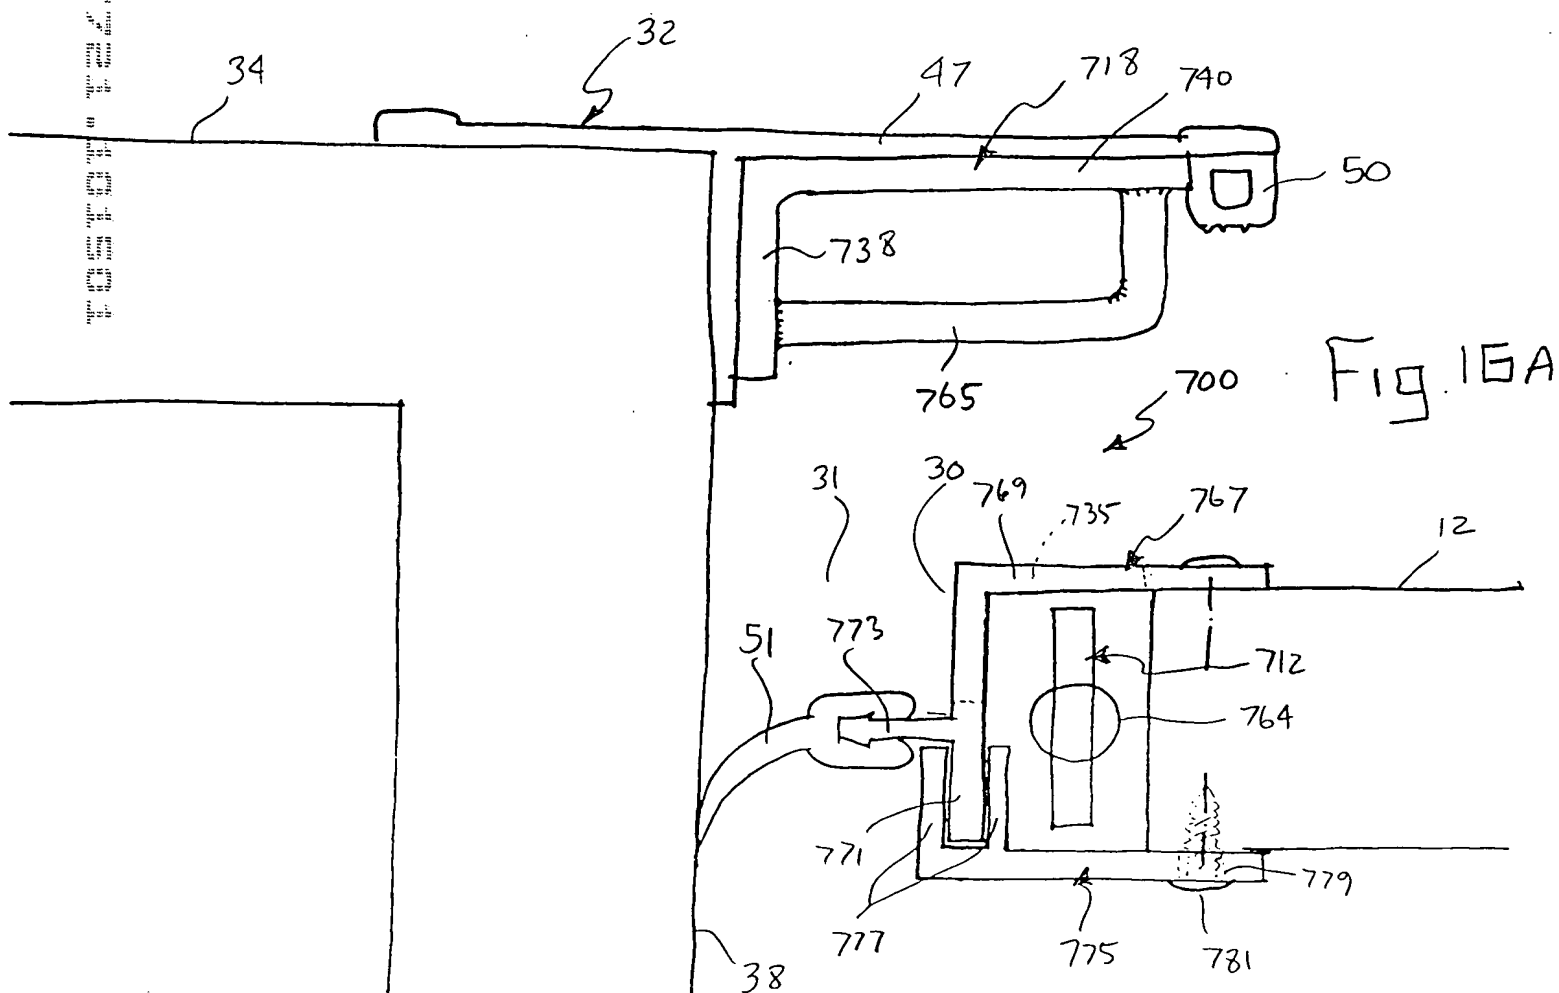
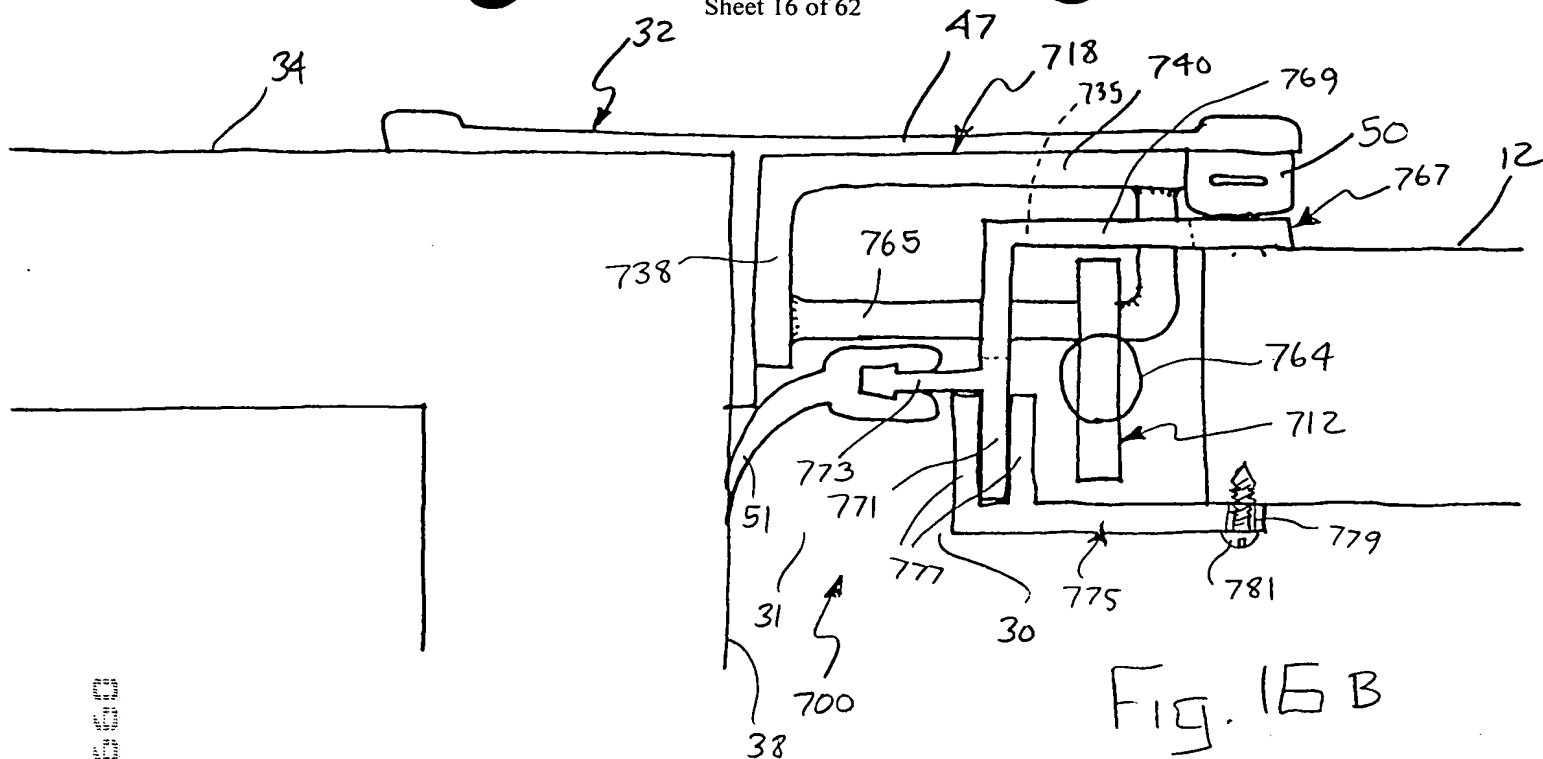


Fig. 14





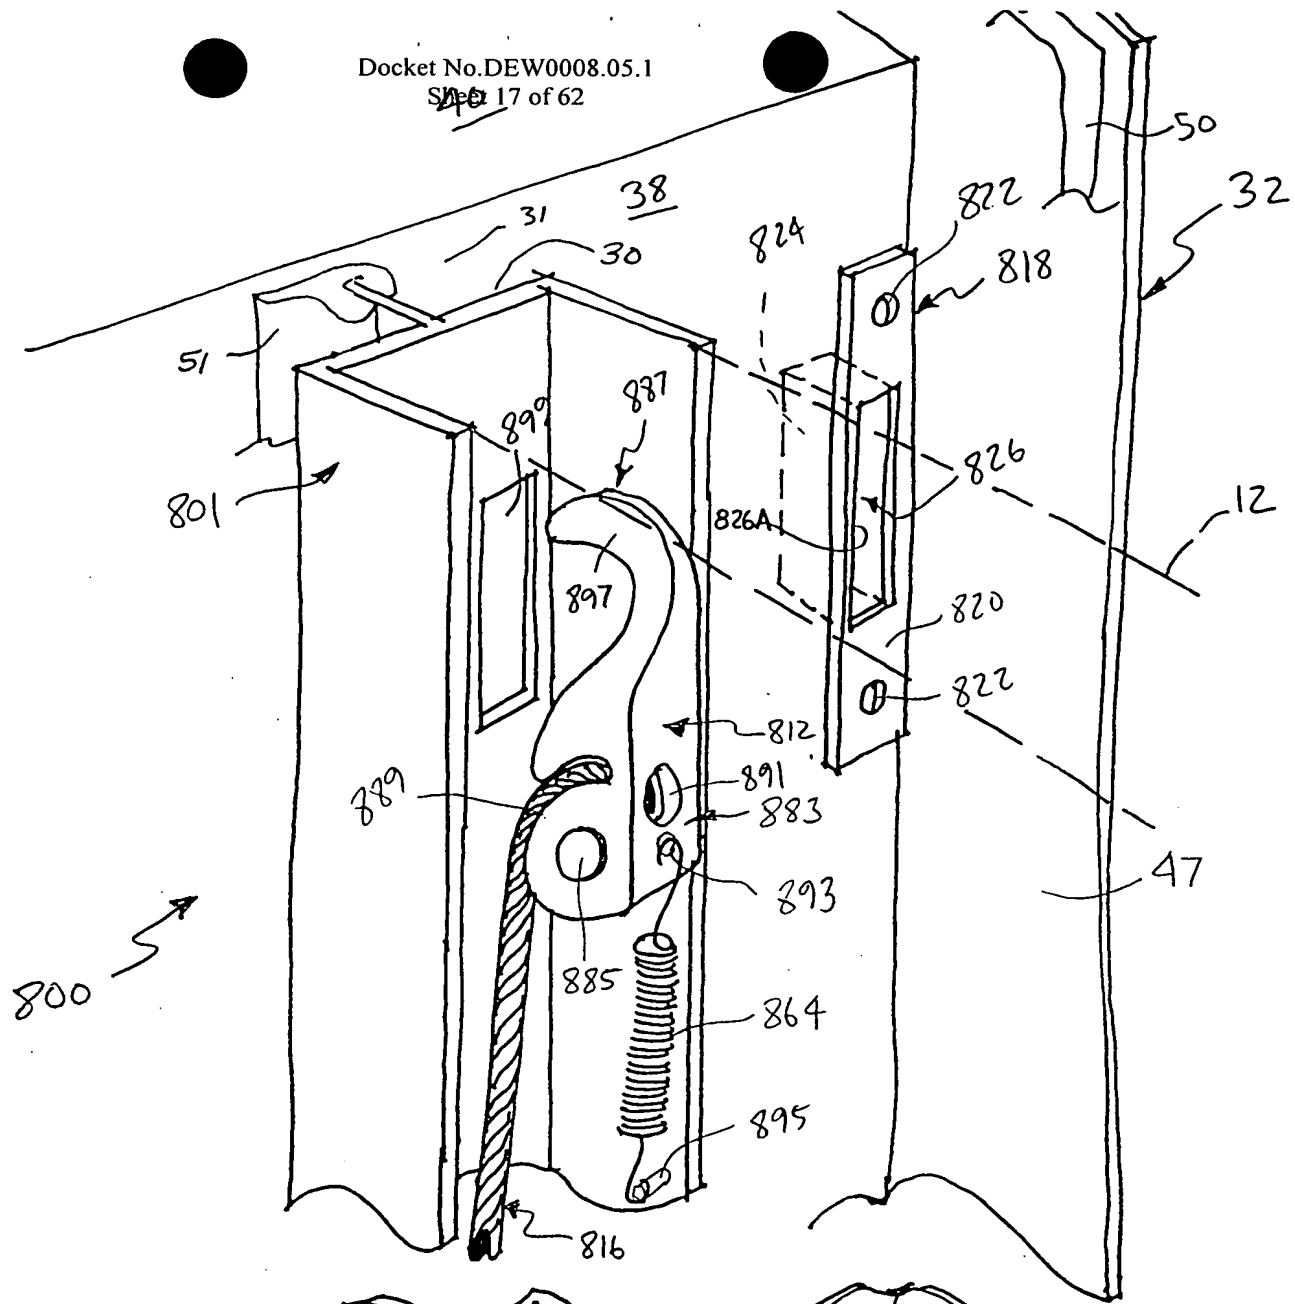
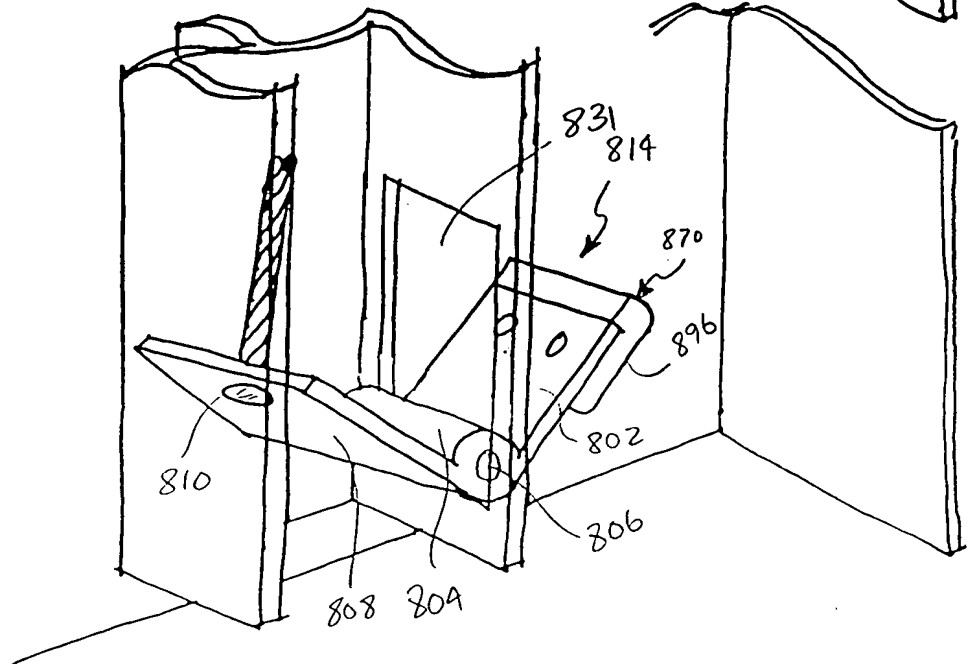




Fig. 17








Fig. 19




Fig. 20



Fig. 21

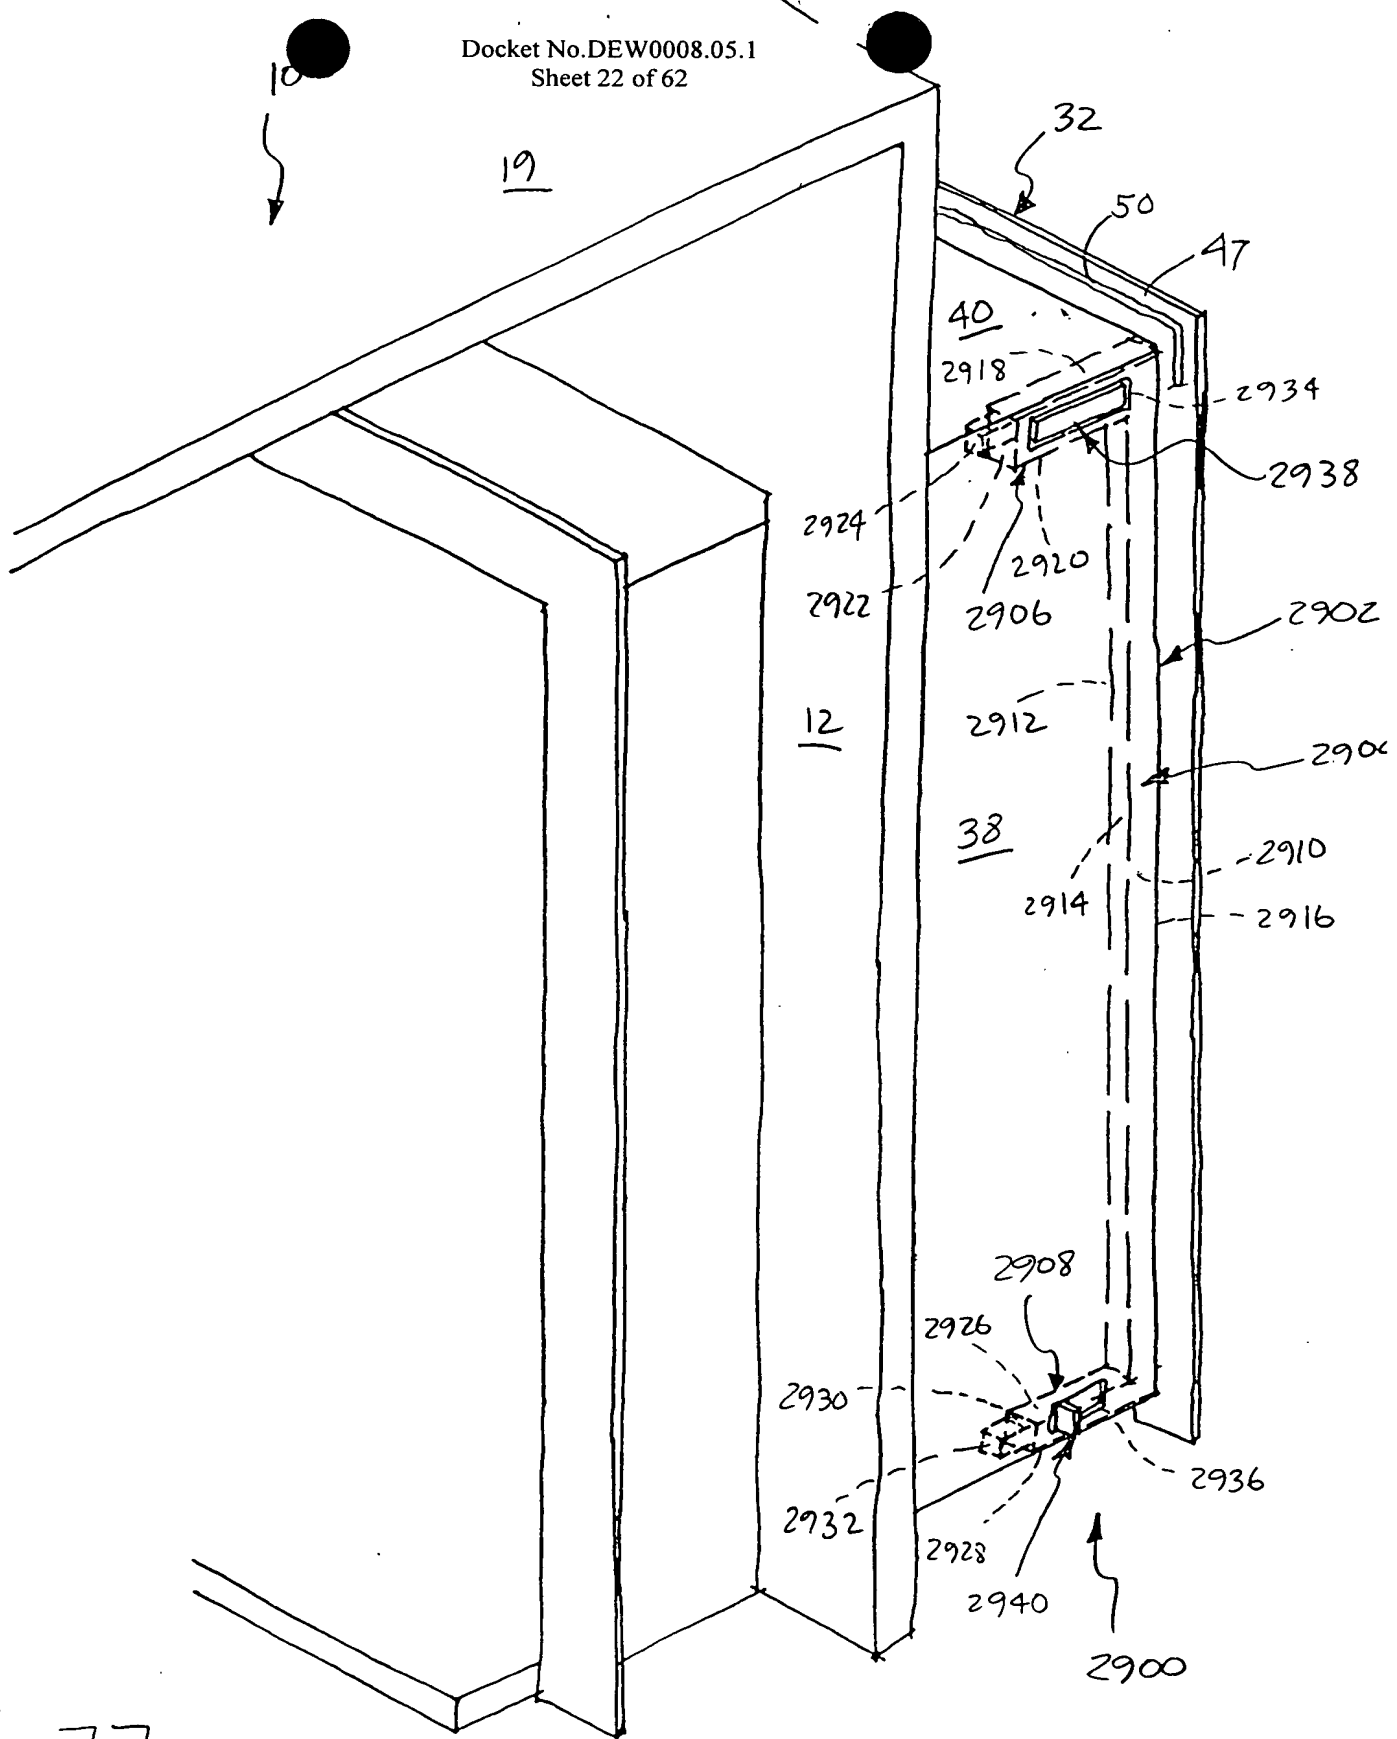


Fig. 22

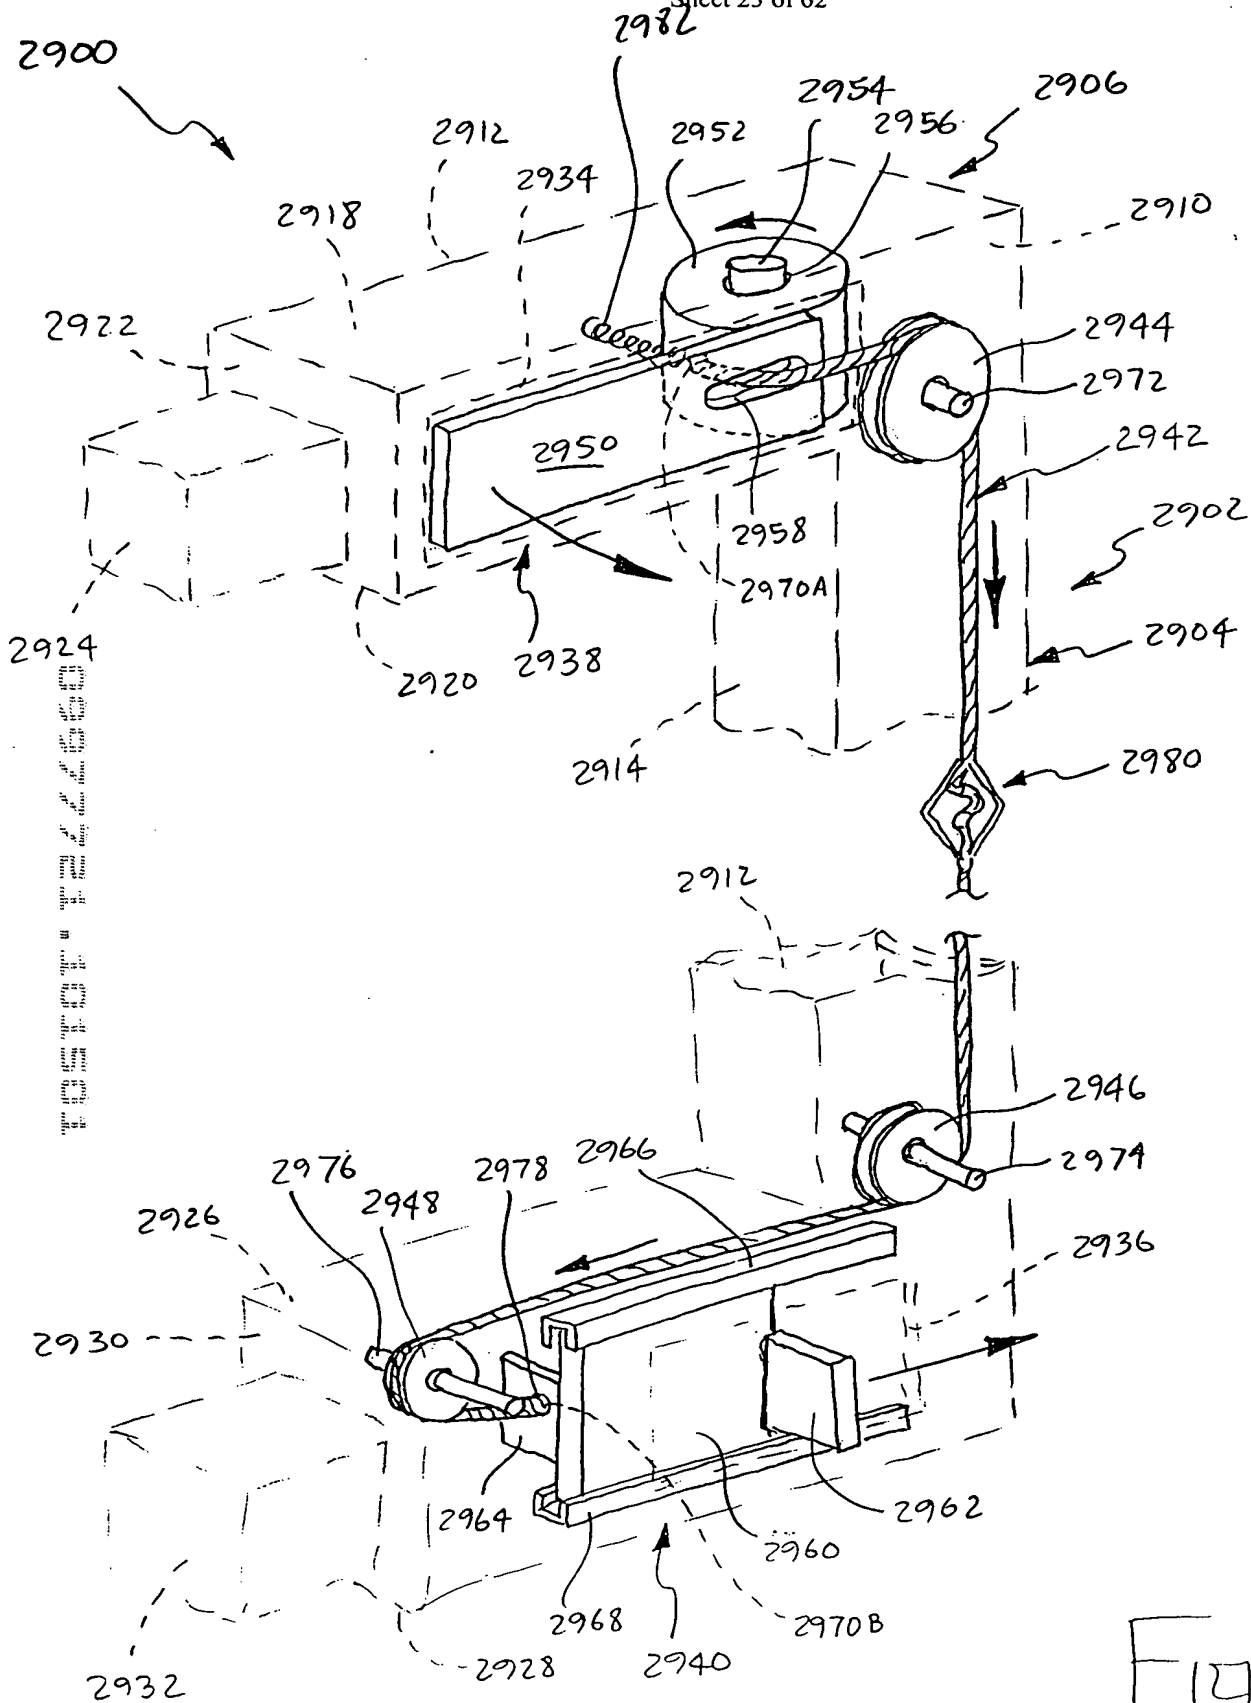
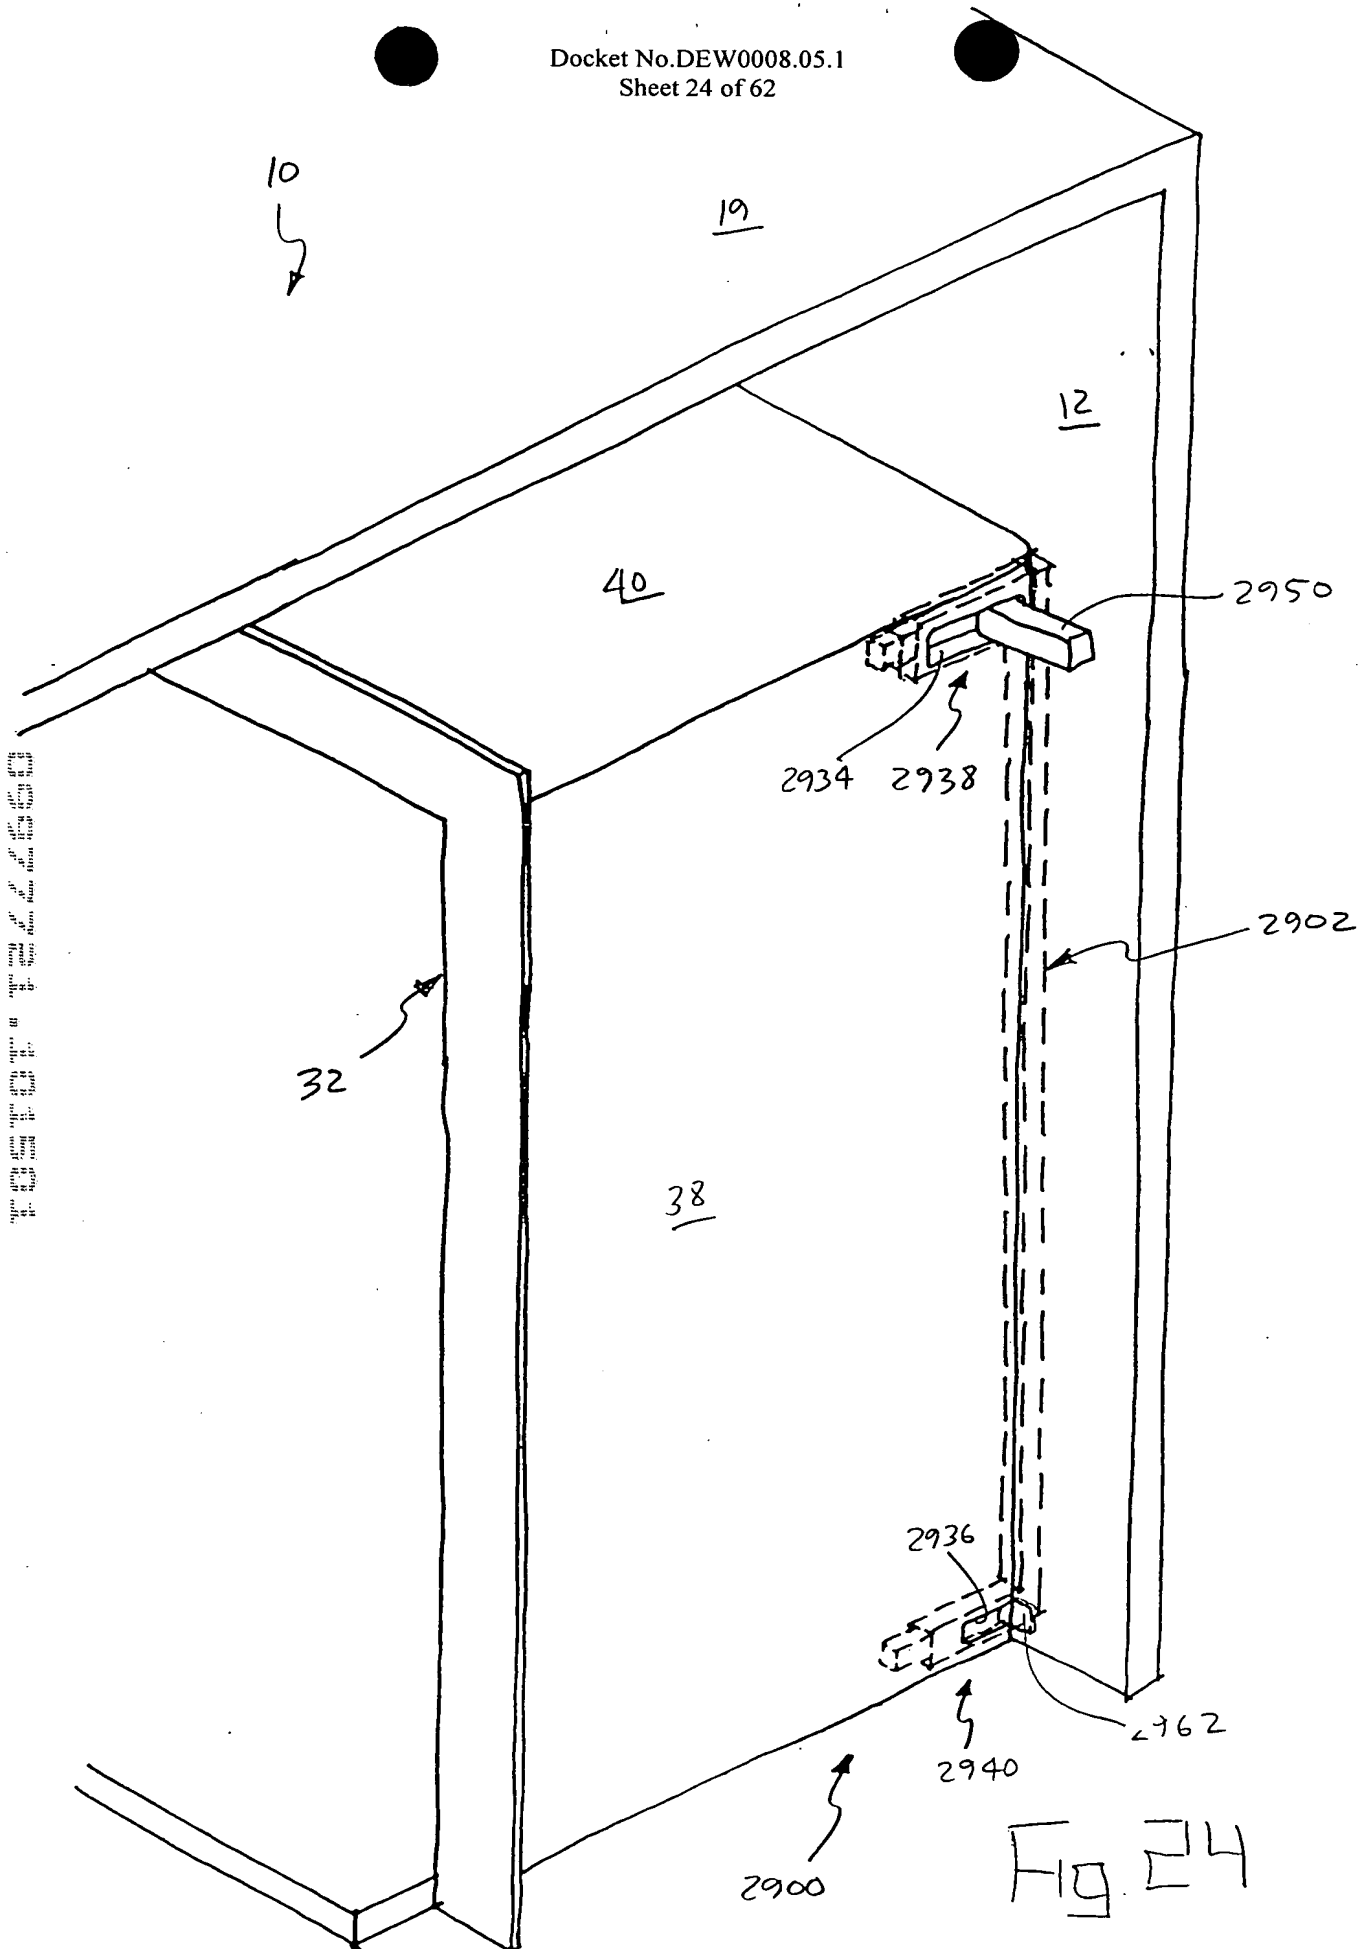
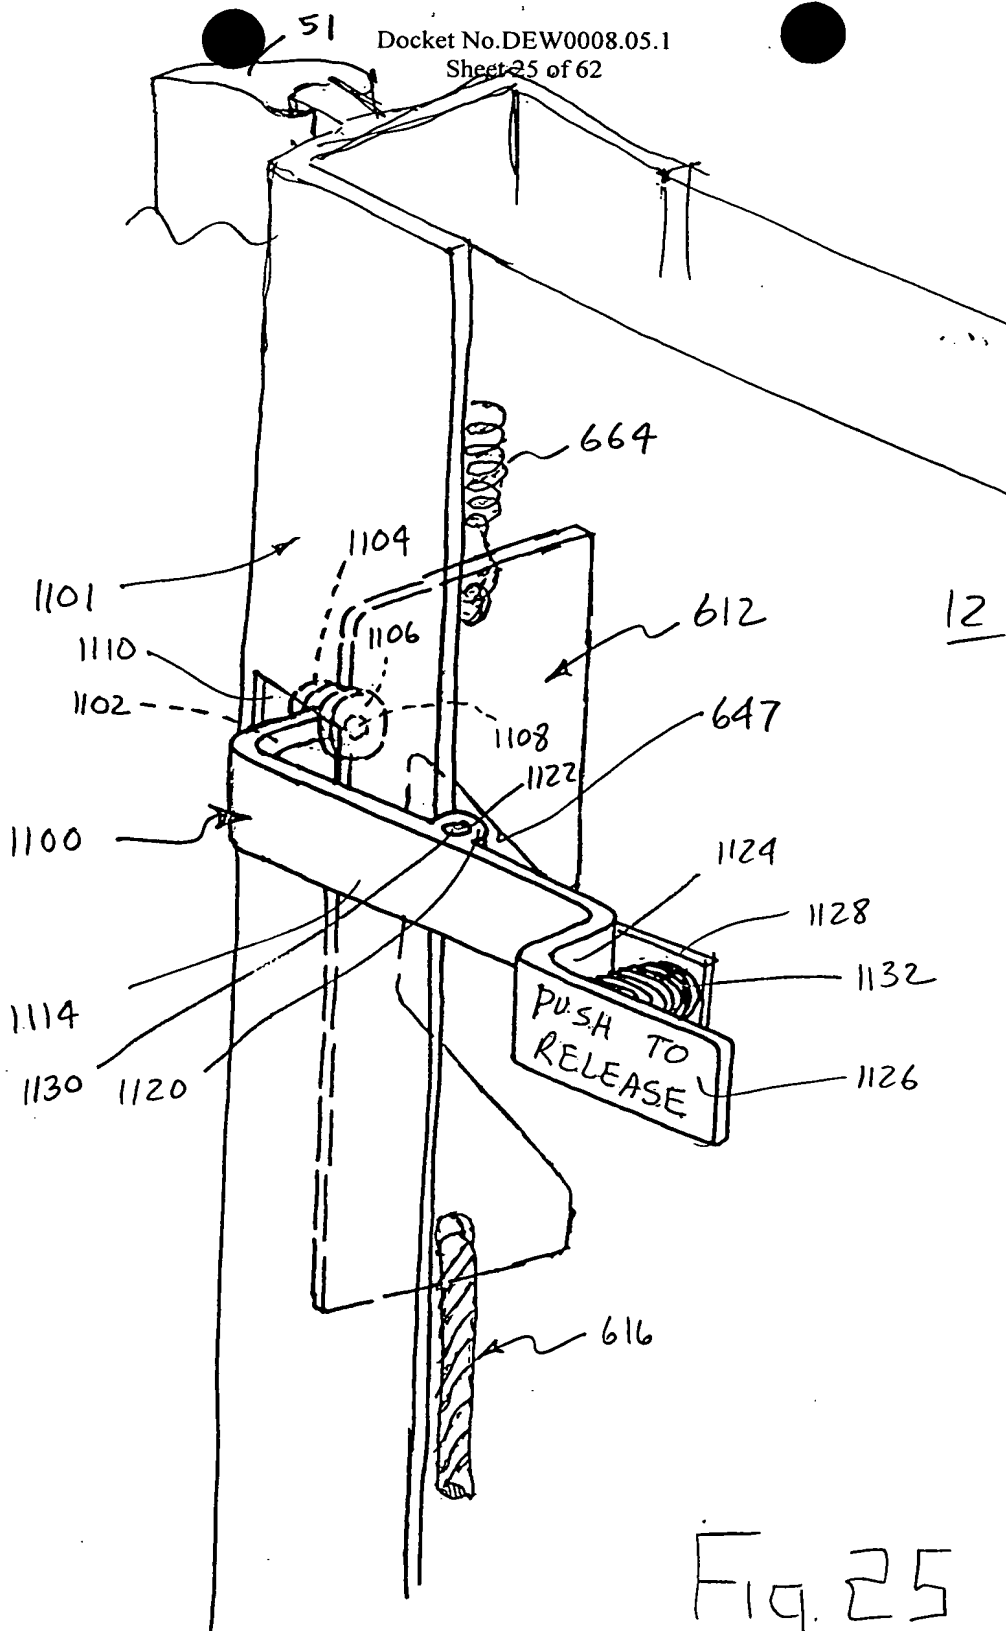


Fig. 23





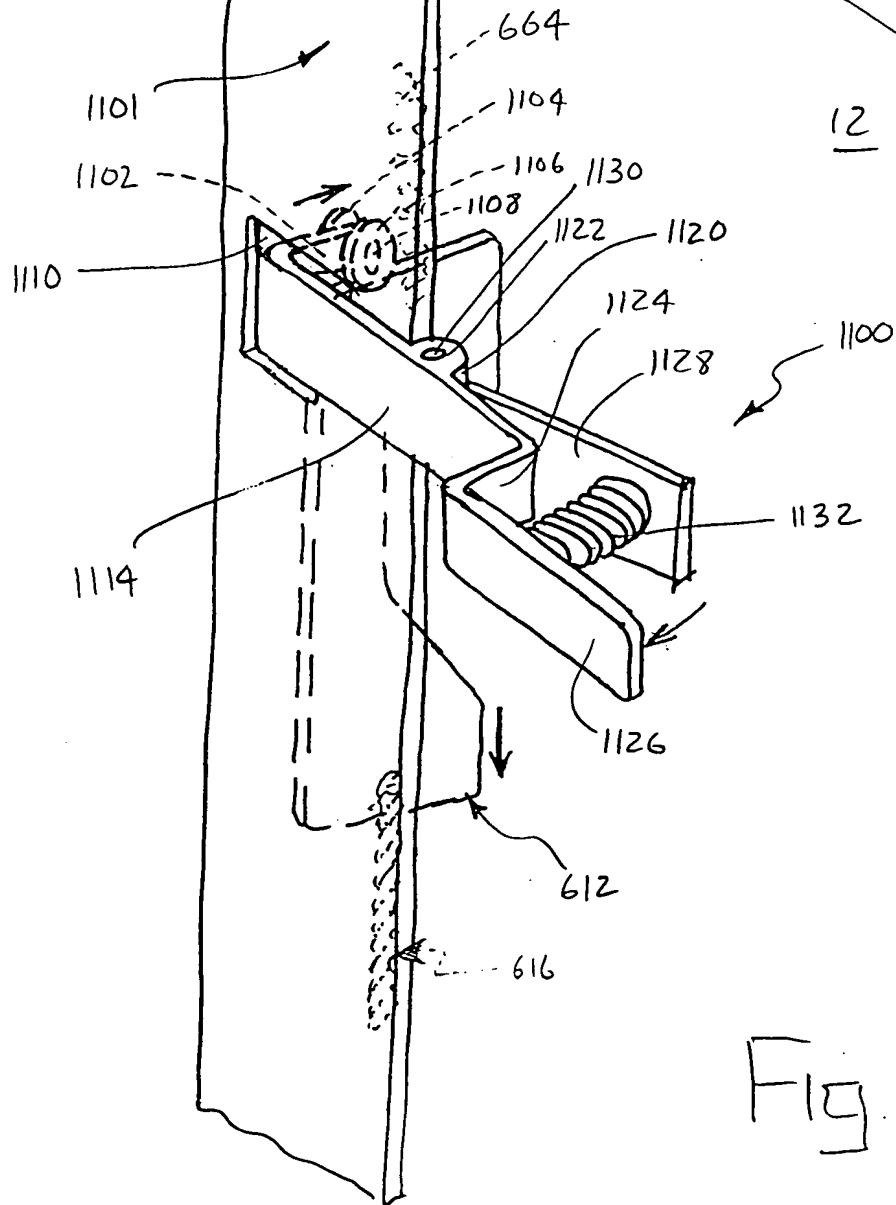


Fig. 26

40

201

32

47

738

718

12

38

764

743

712

747

739

745

1212

1210

765

740

735

1206

1200

1208


1204

1214

1202

1216

Fig. 27

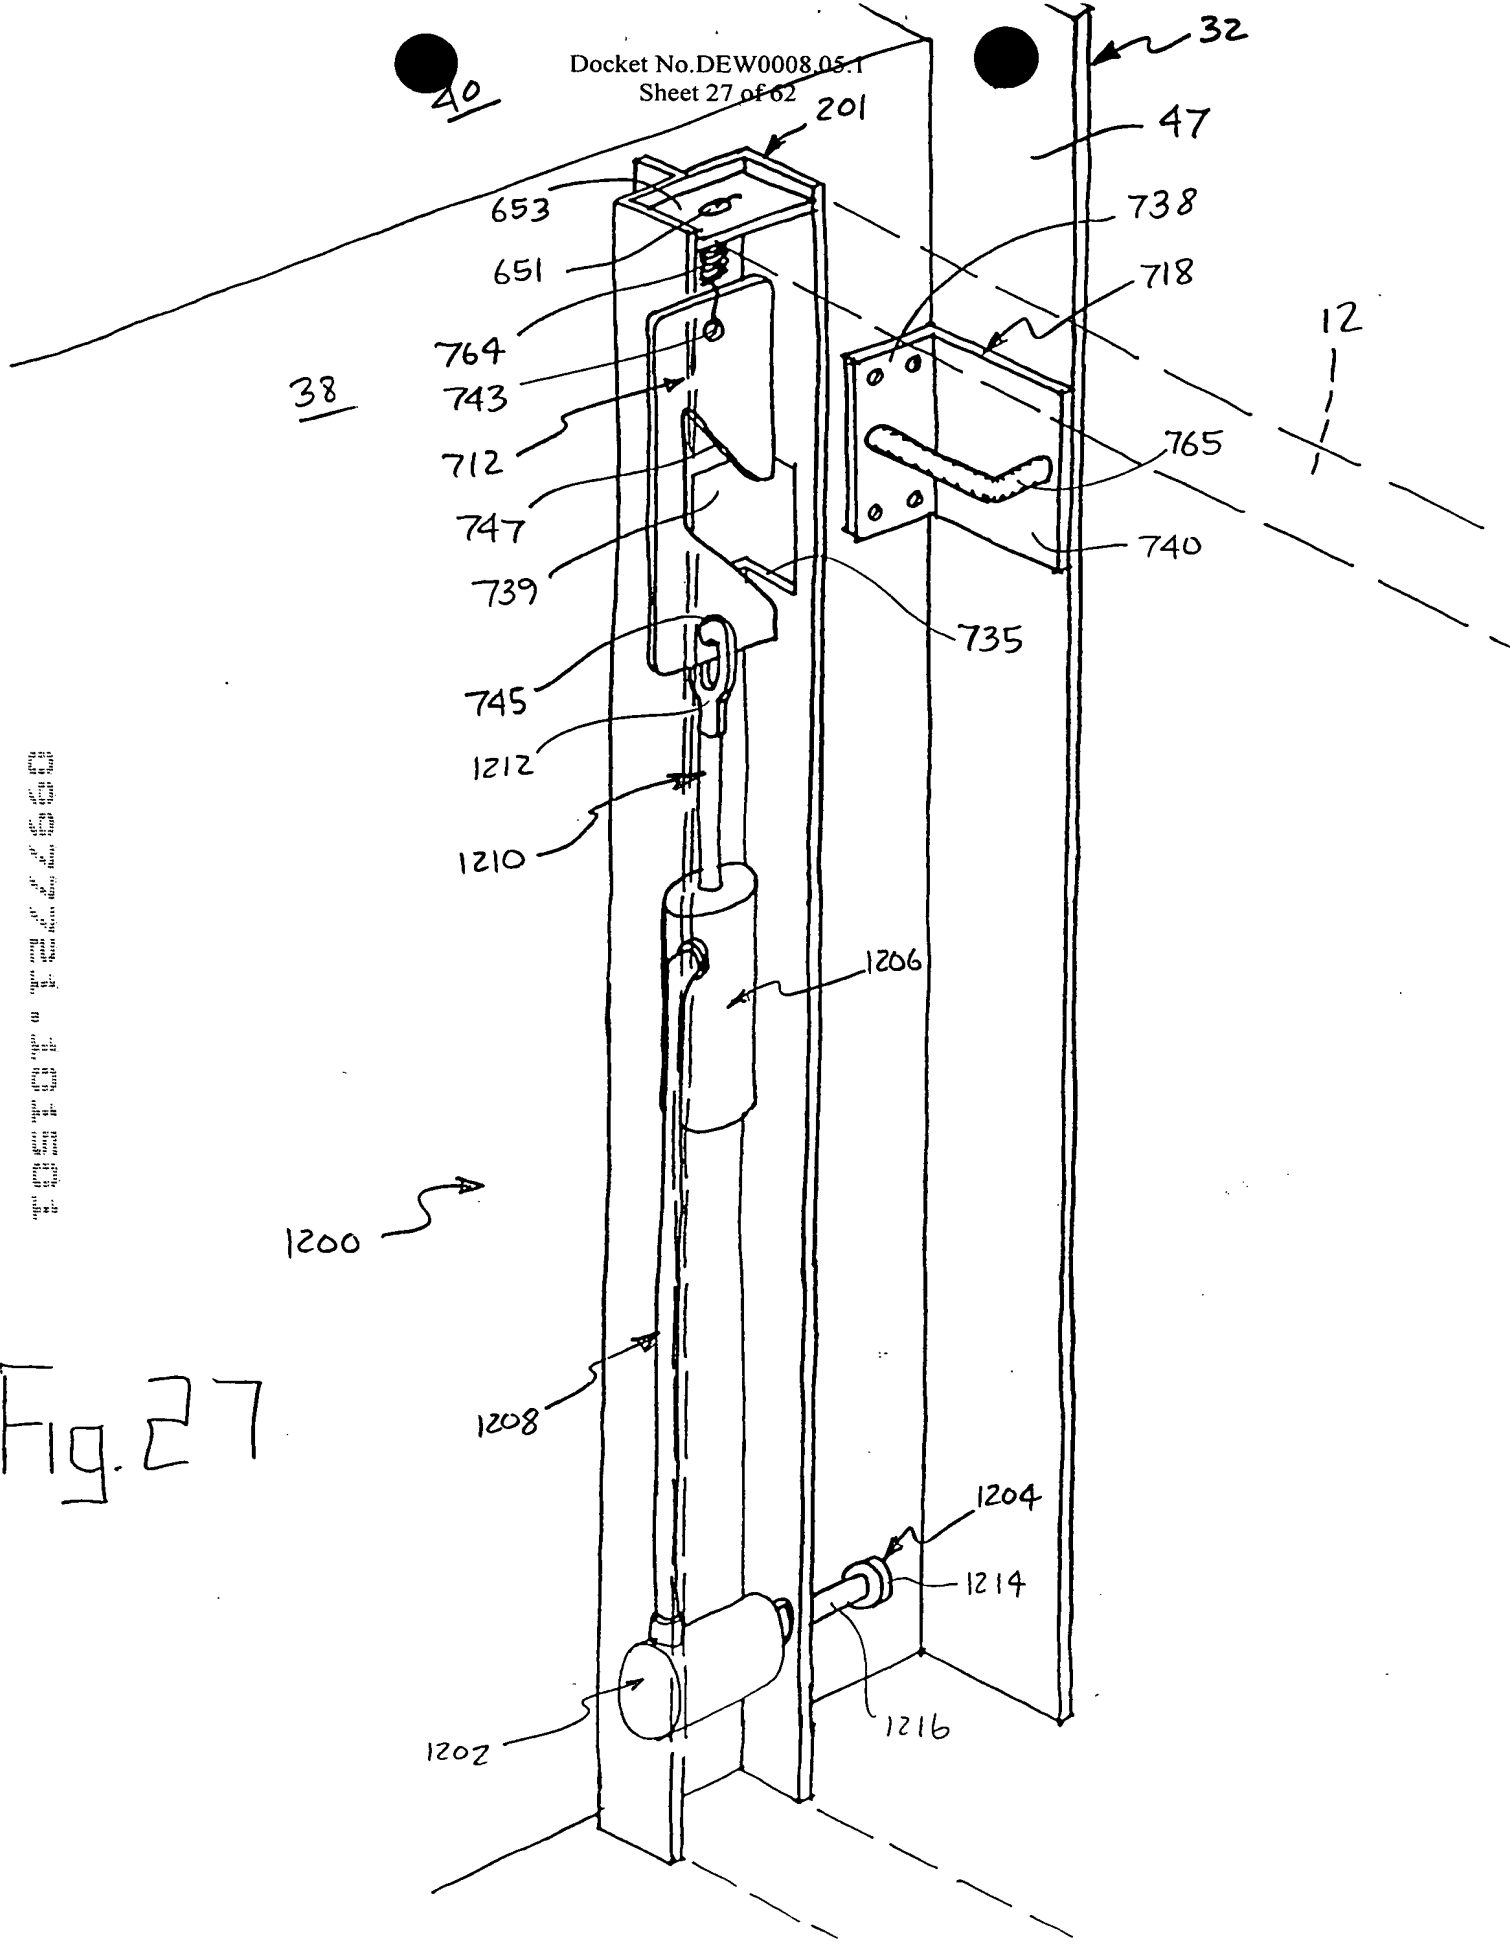

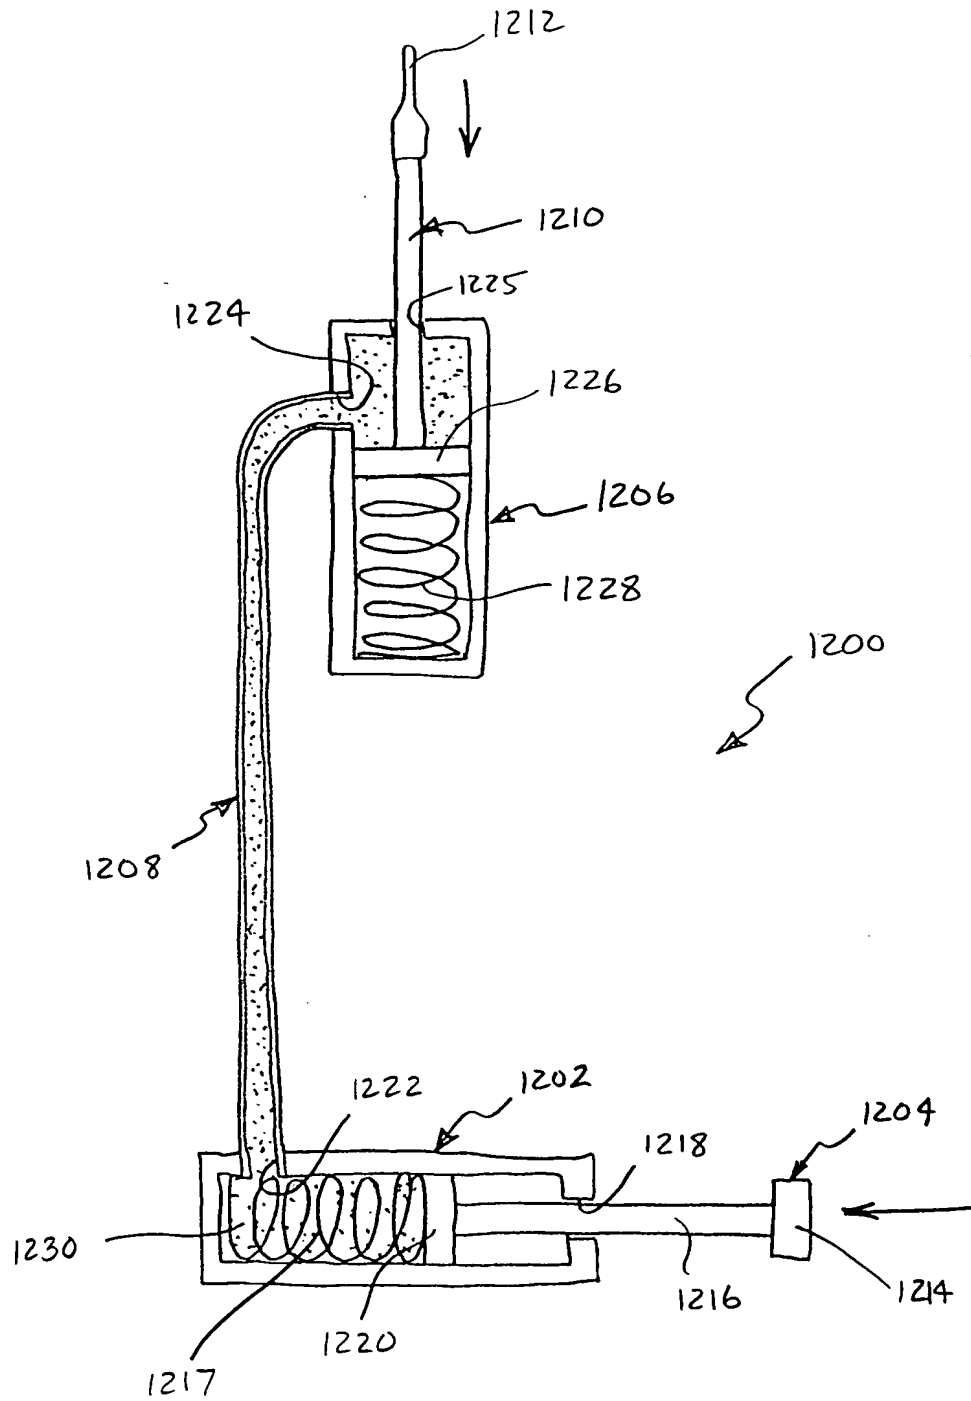


Fig. 28

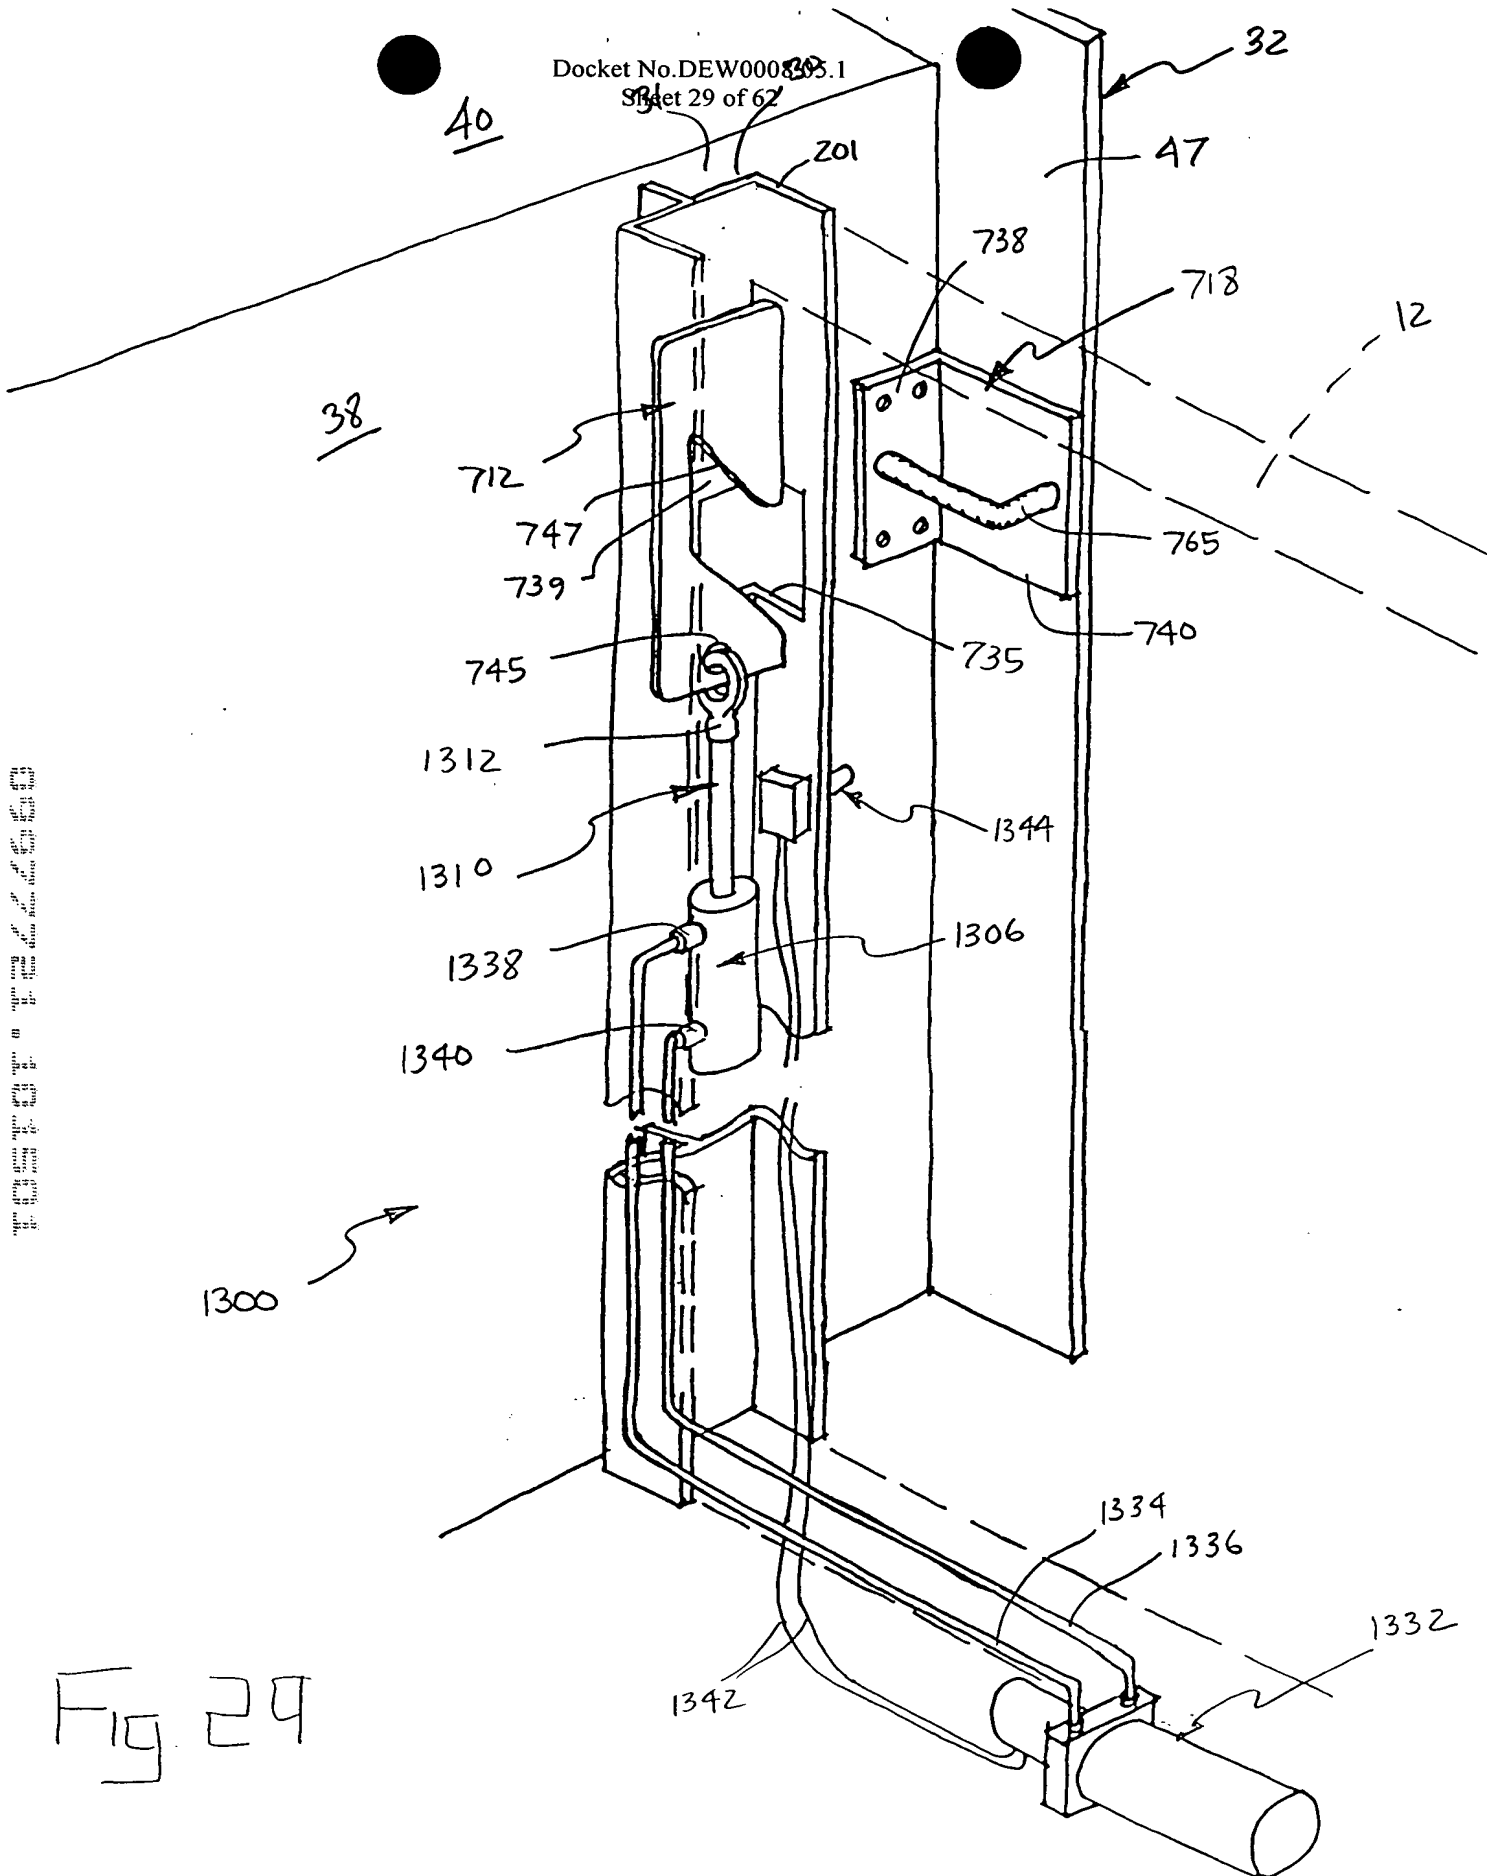


Fig. 29

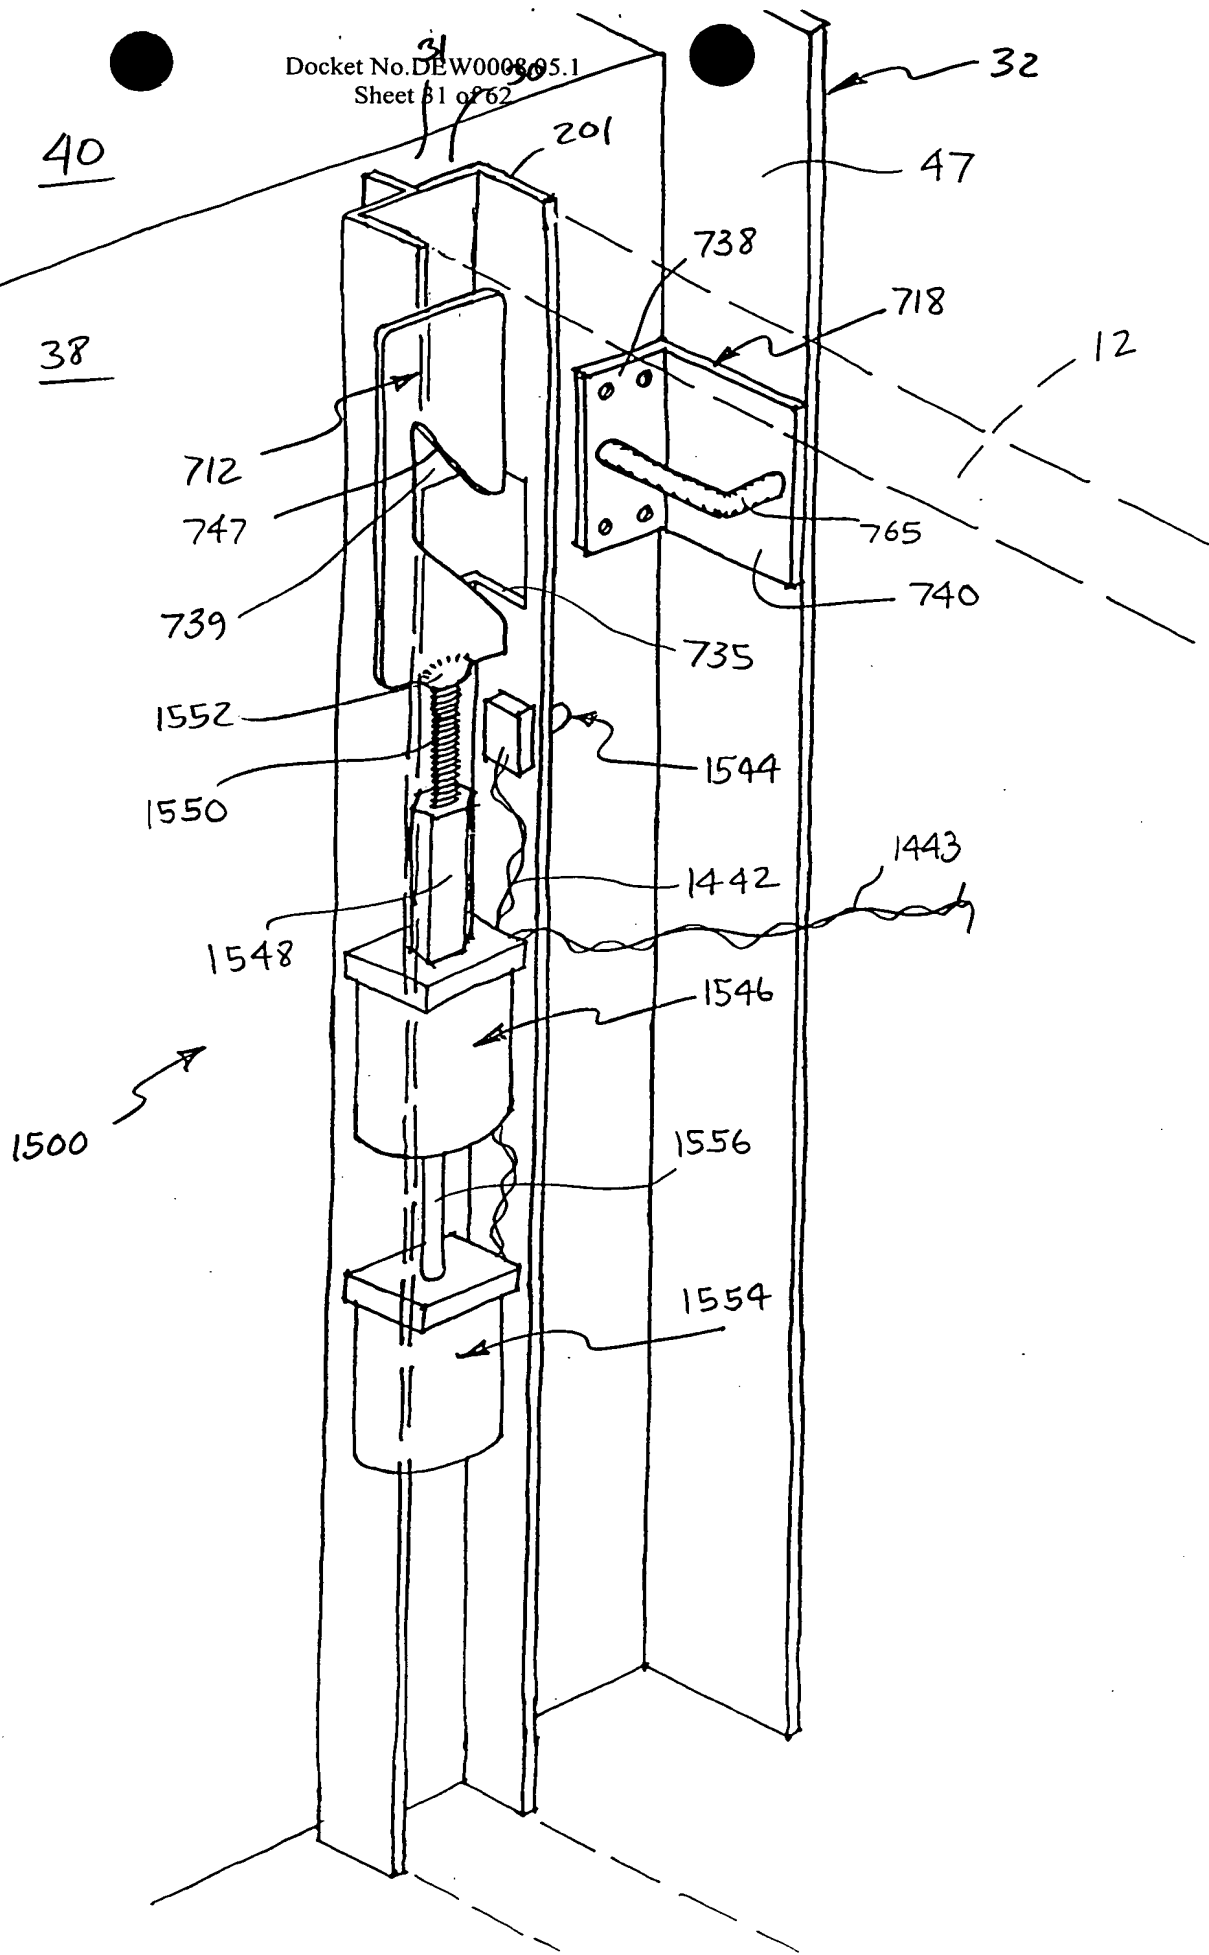
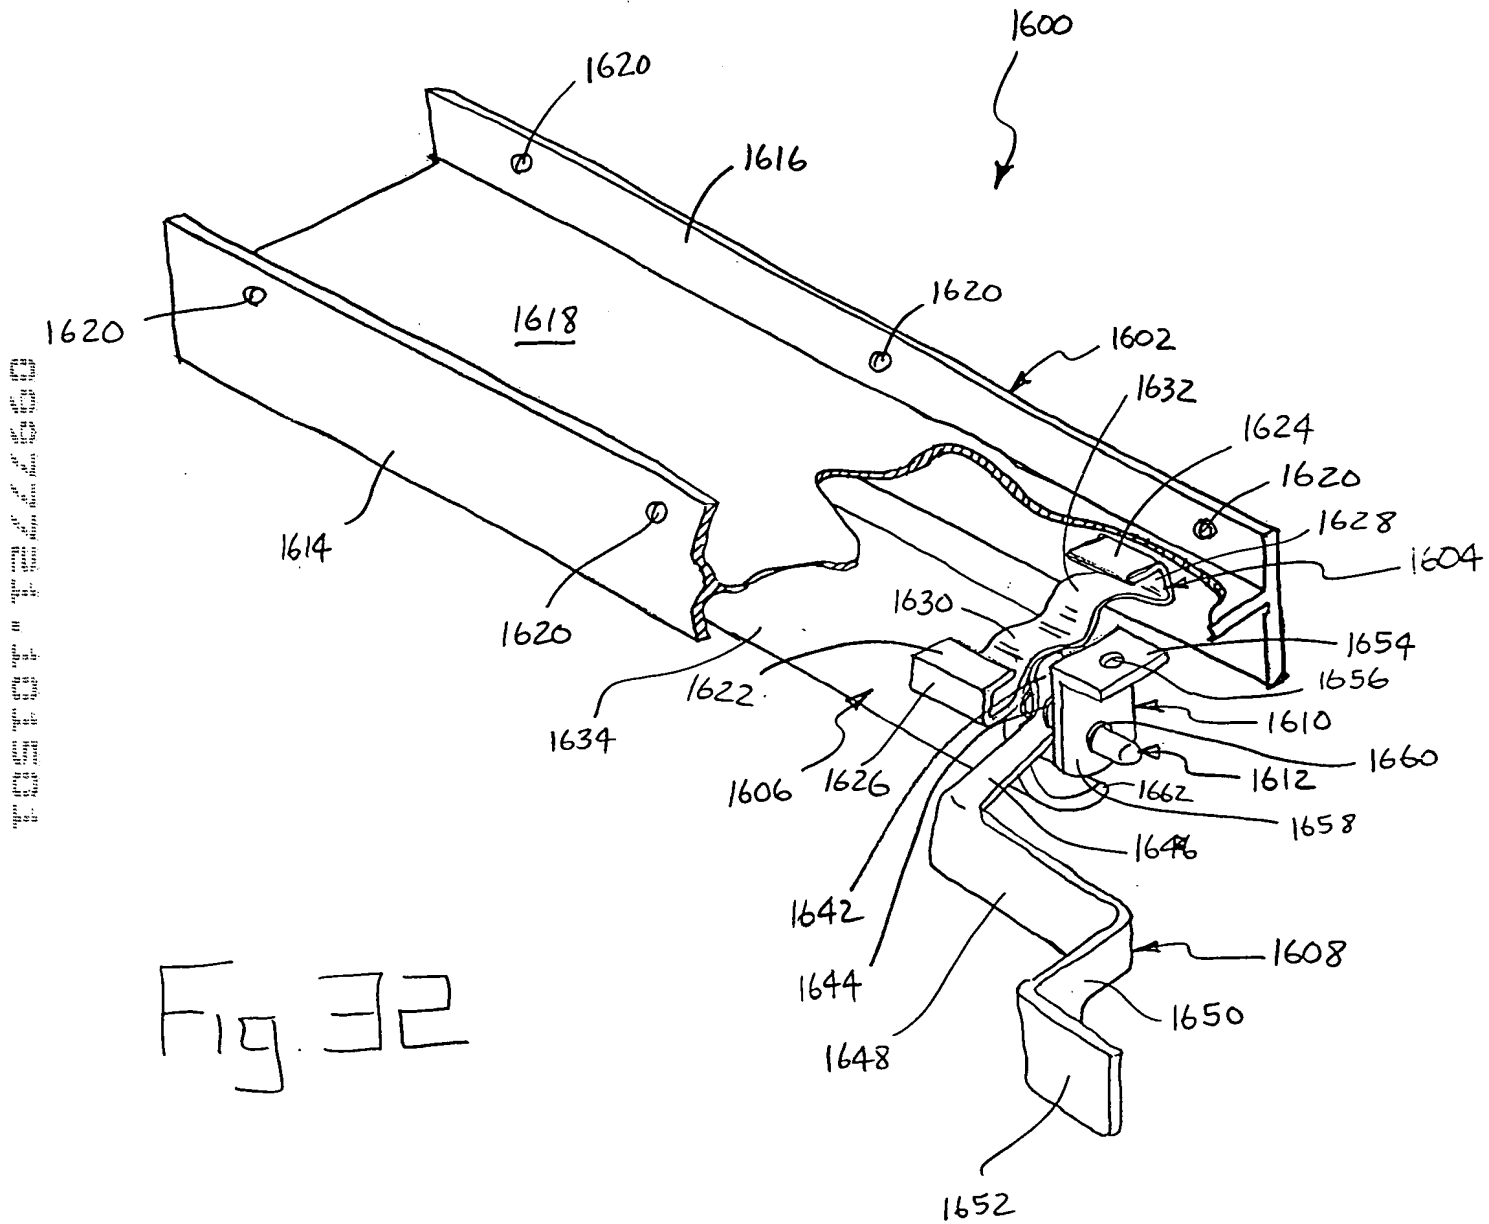


Fig. 31



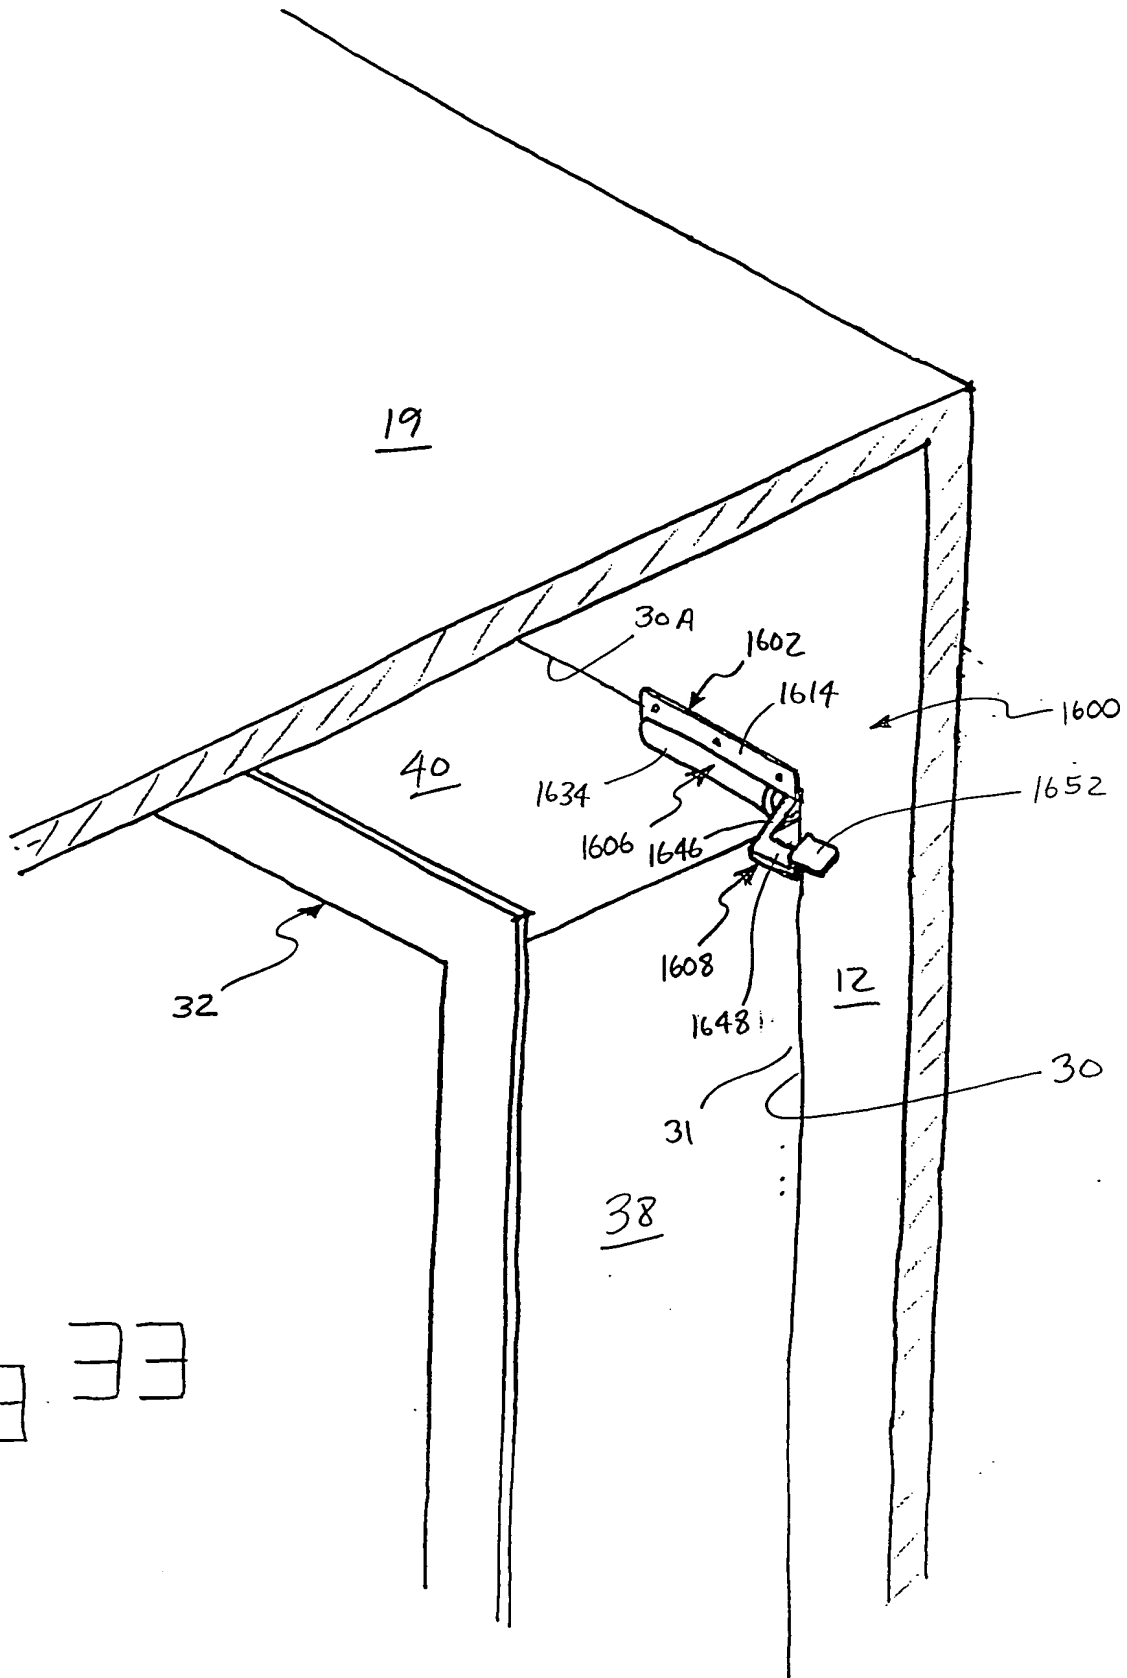


Fig. 33

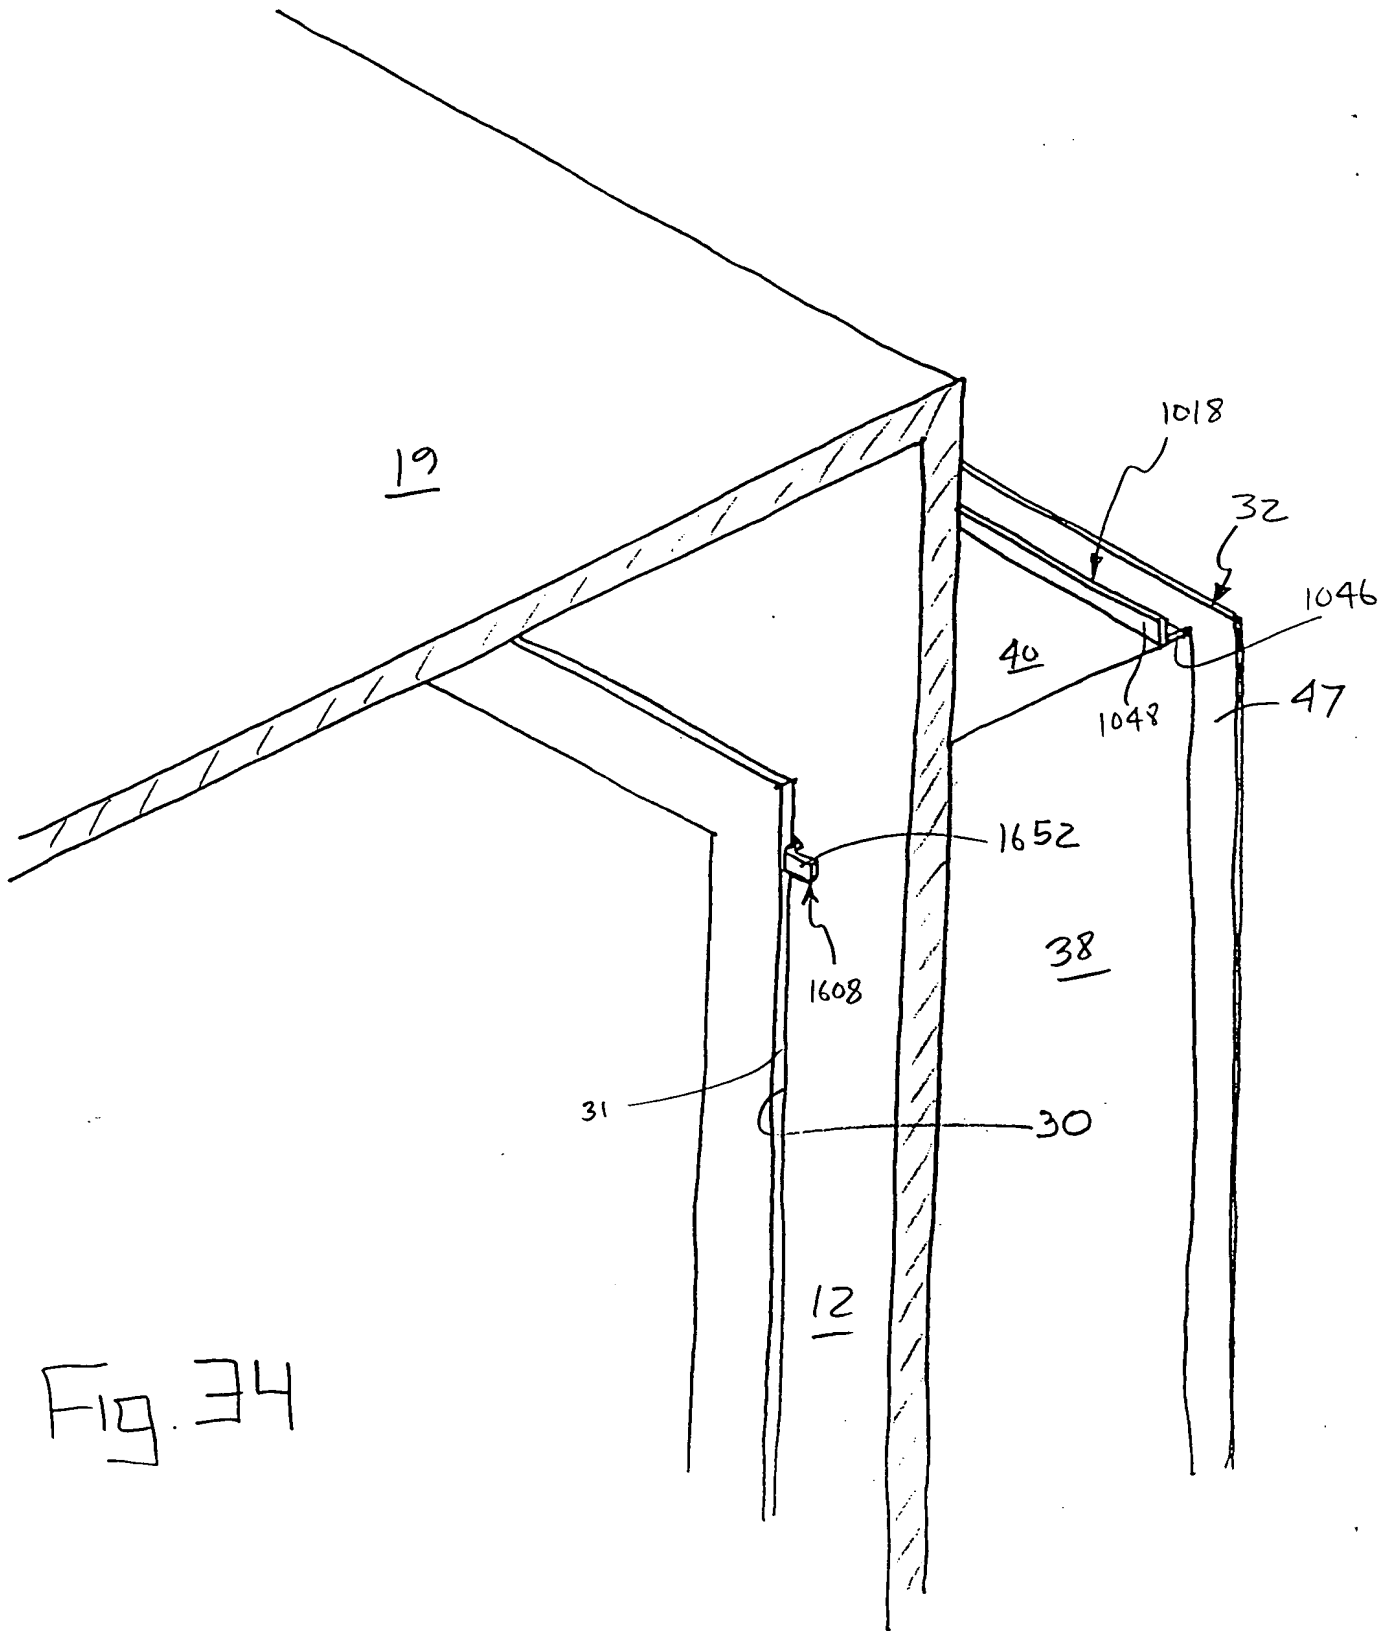


Fig. 34

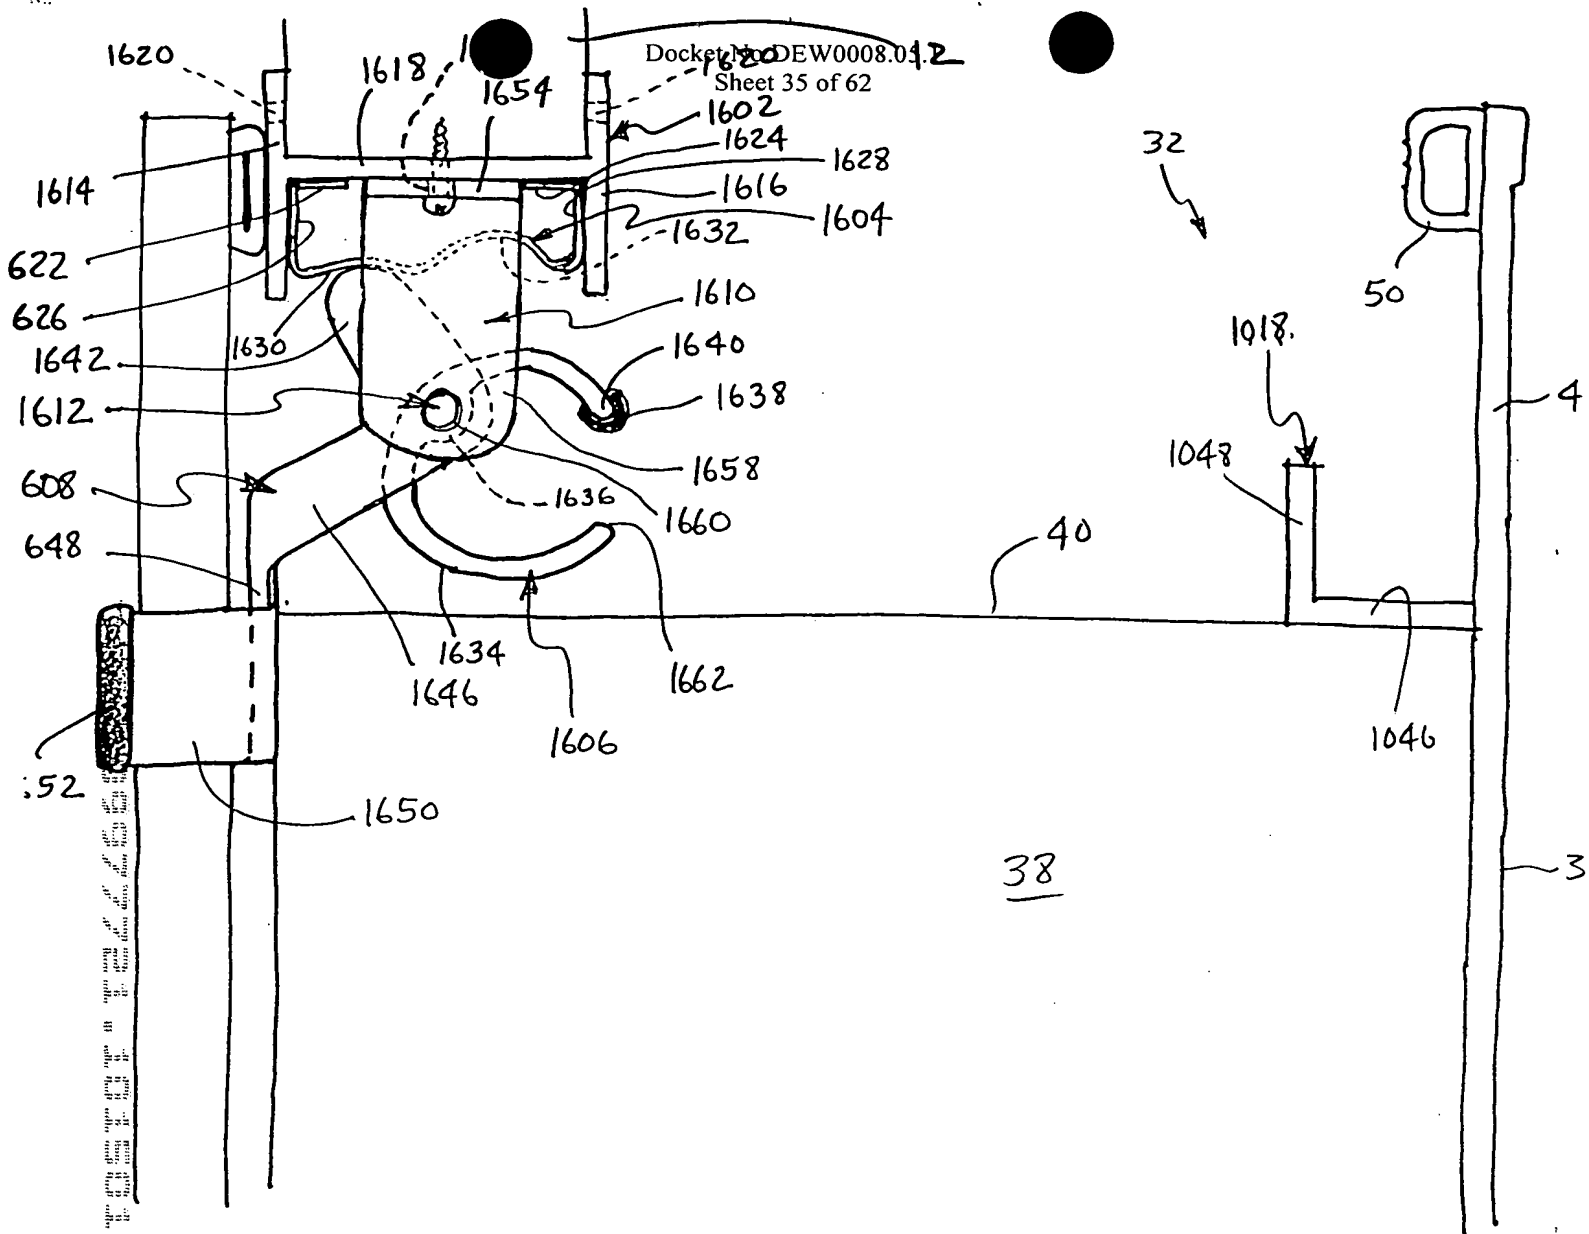


Fig. 35

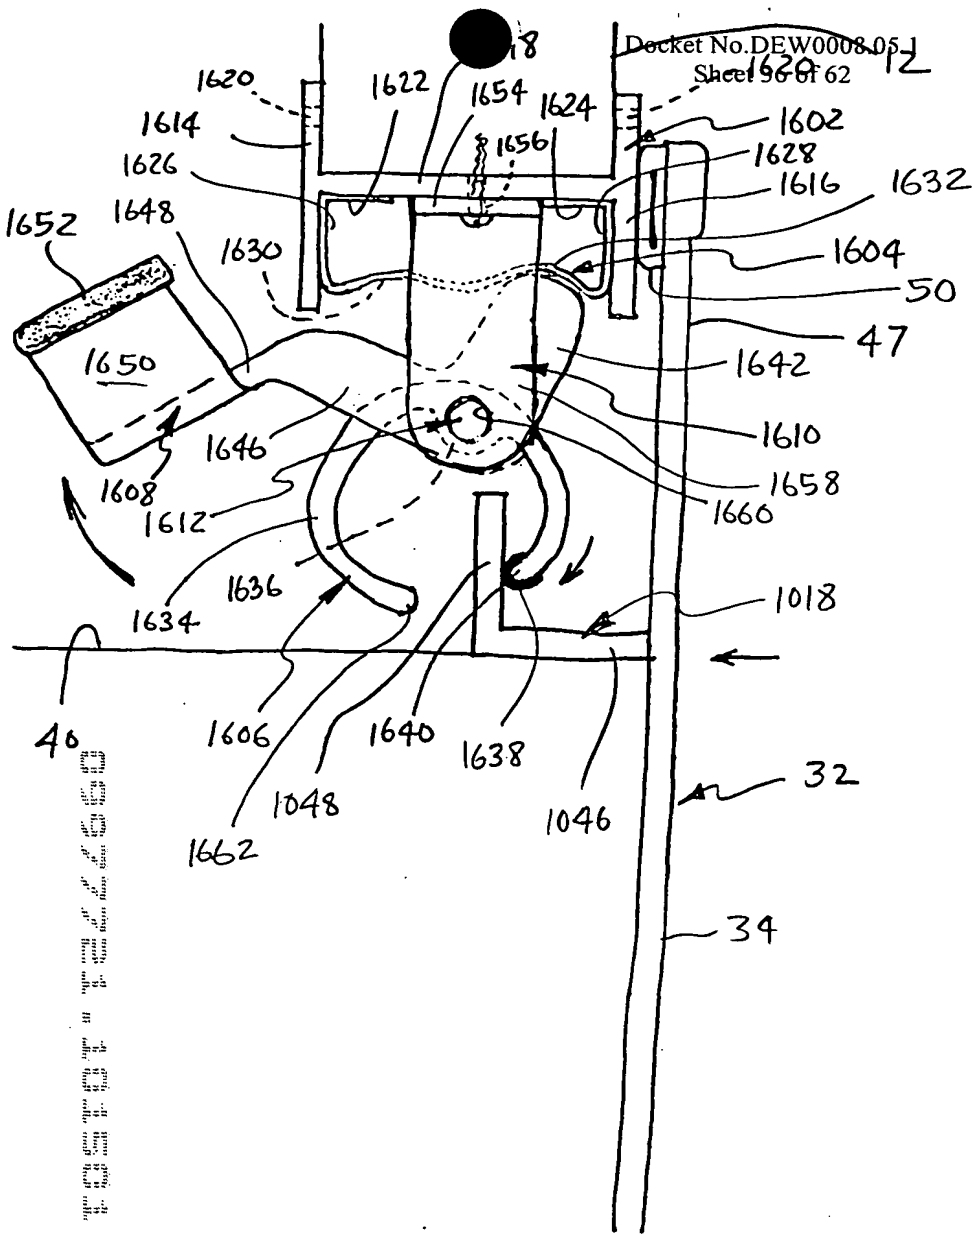


Fig. 36

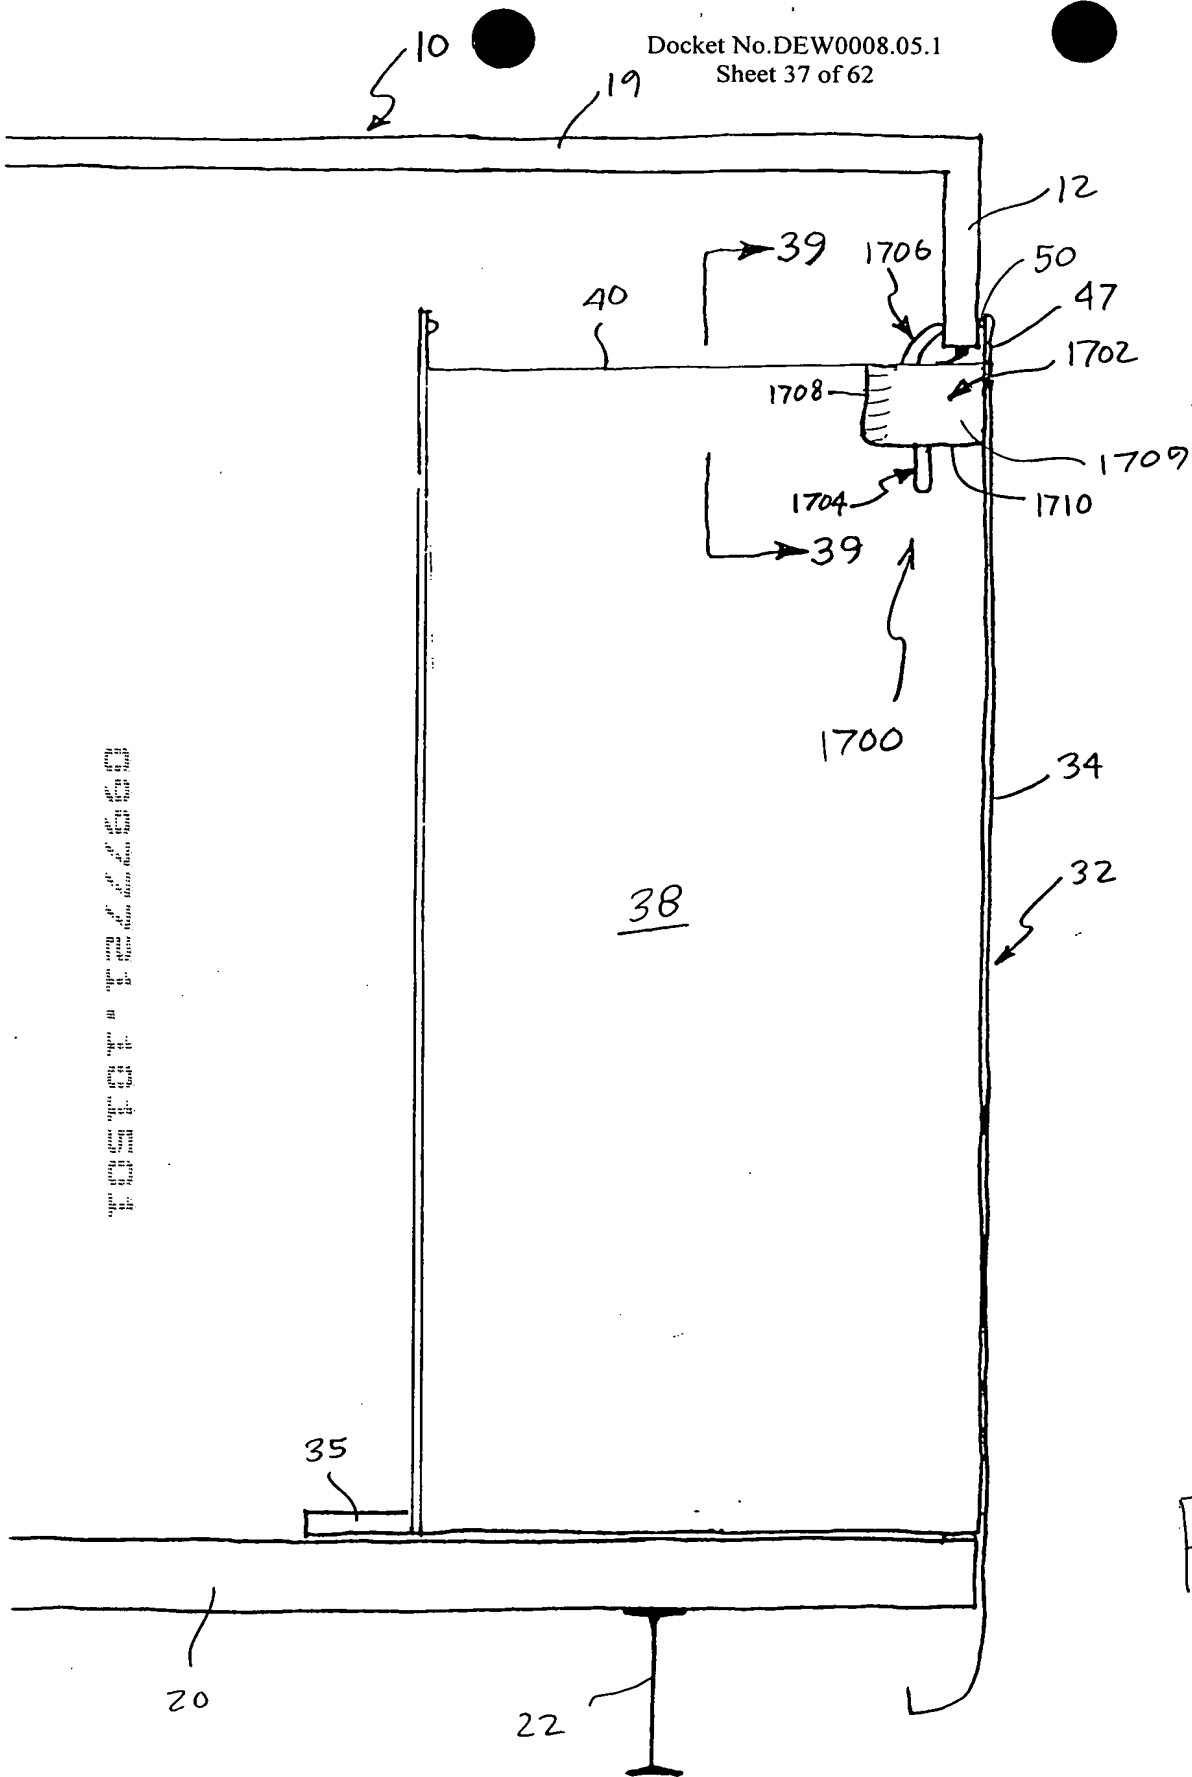


Fig. 37

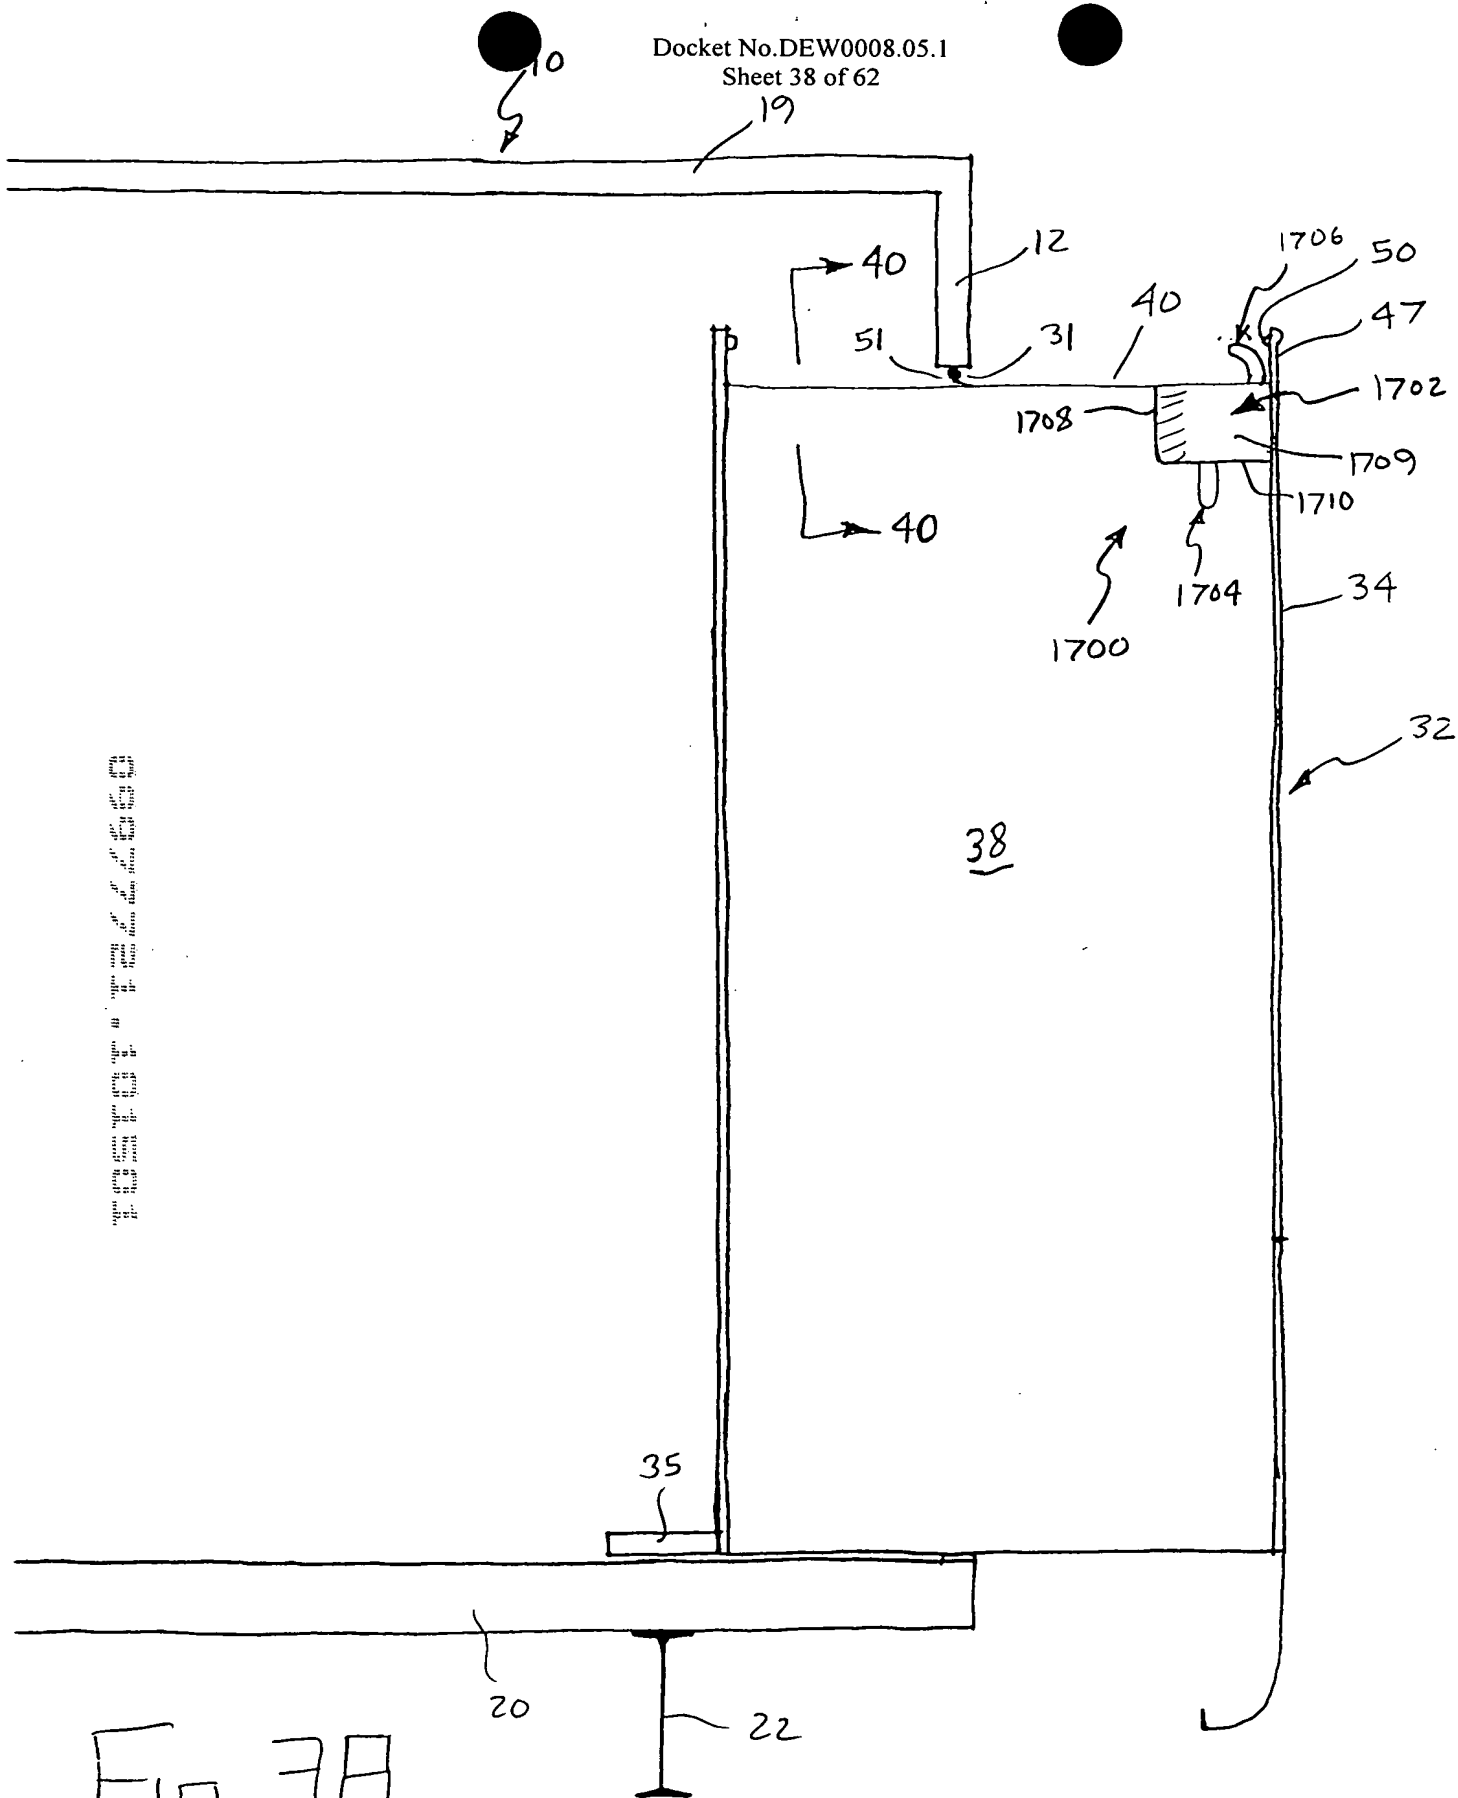



Fig. 30



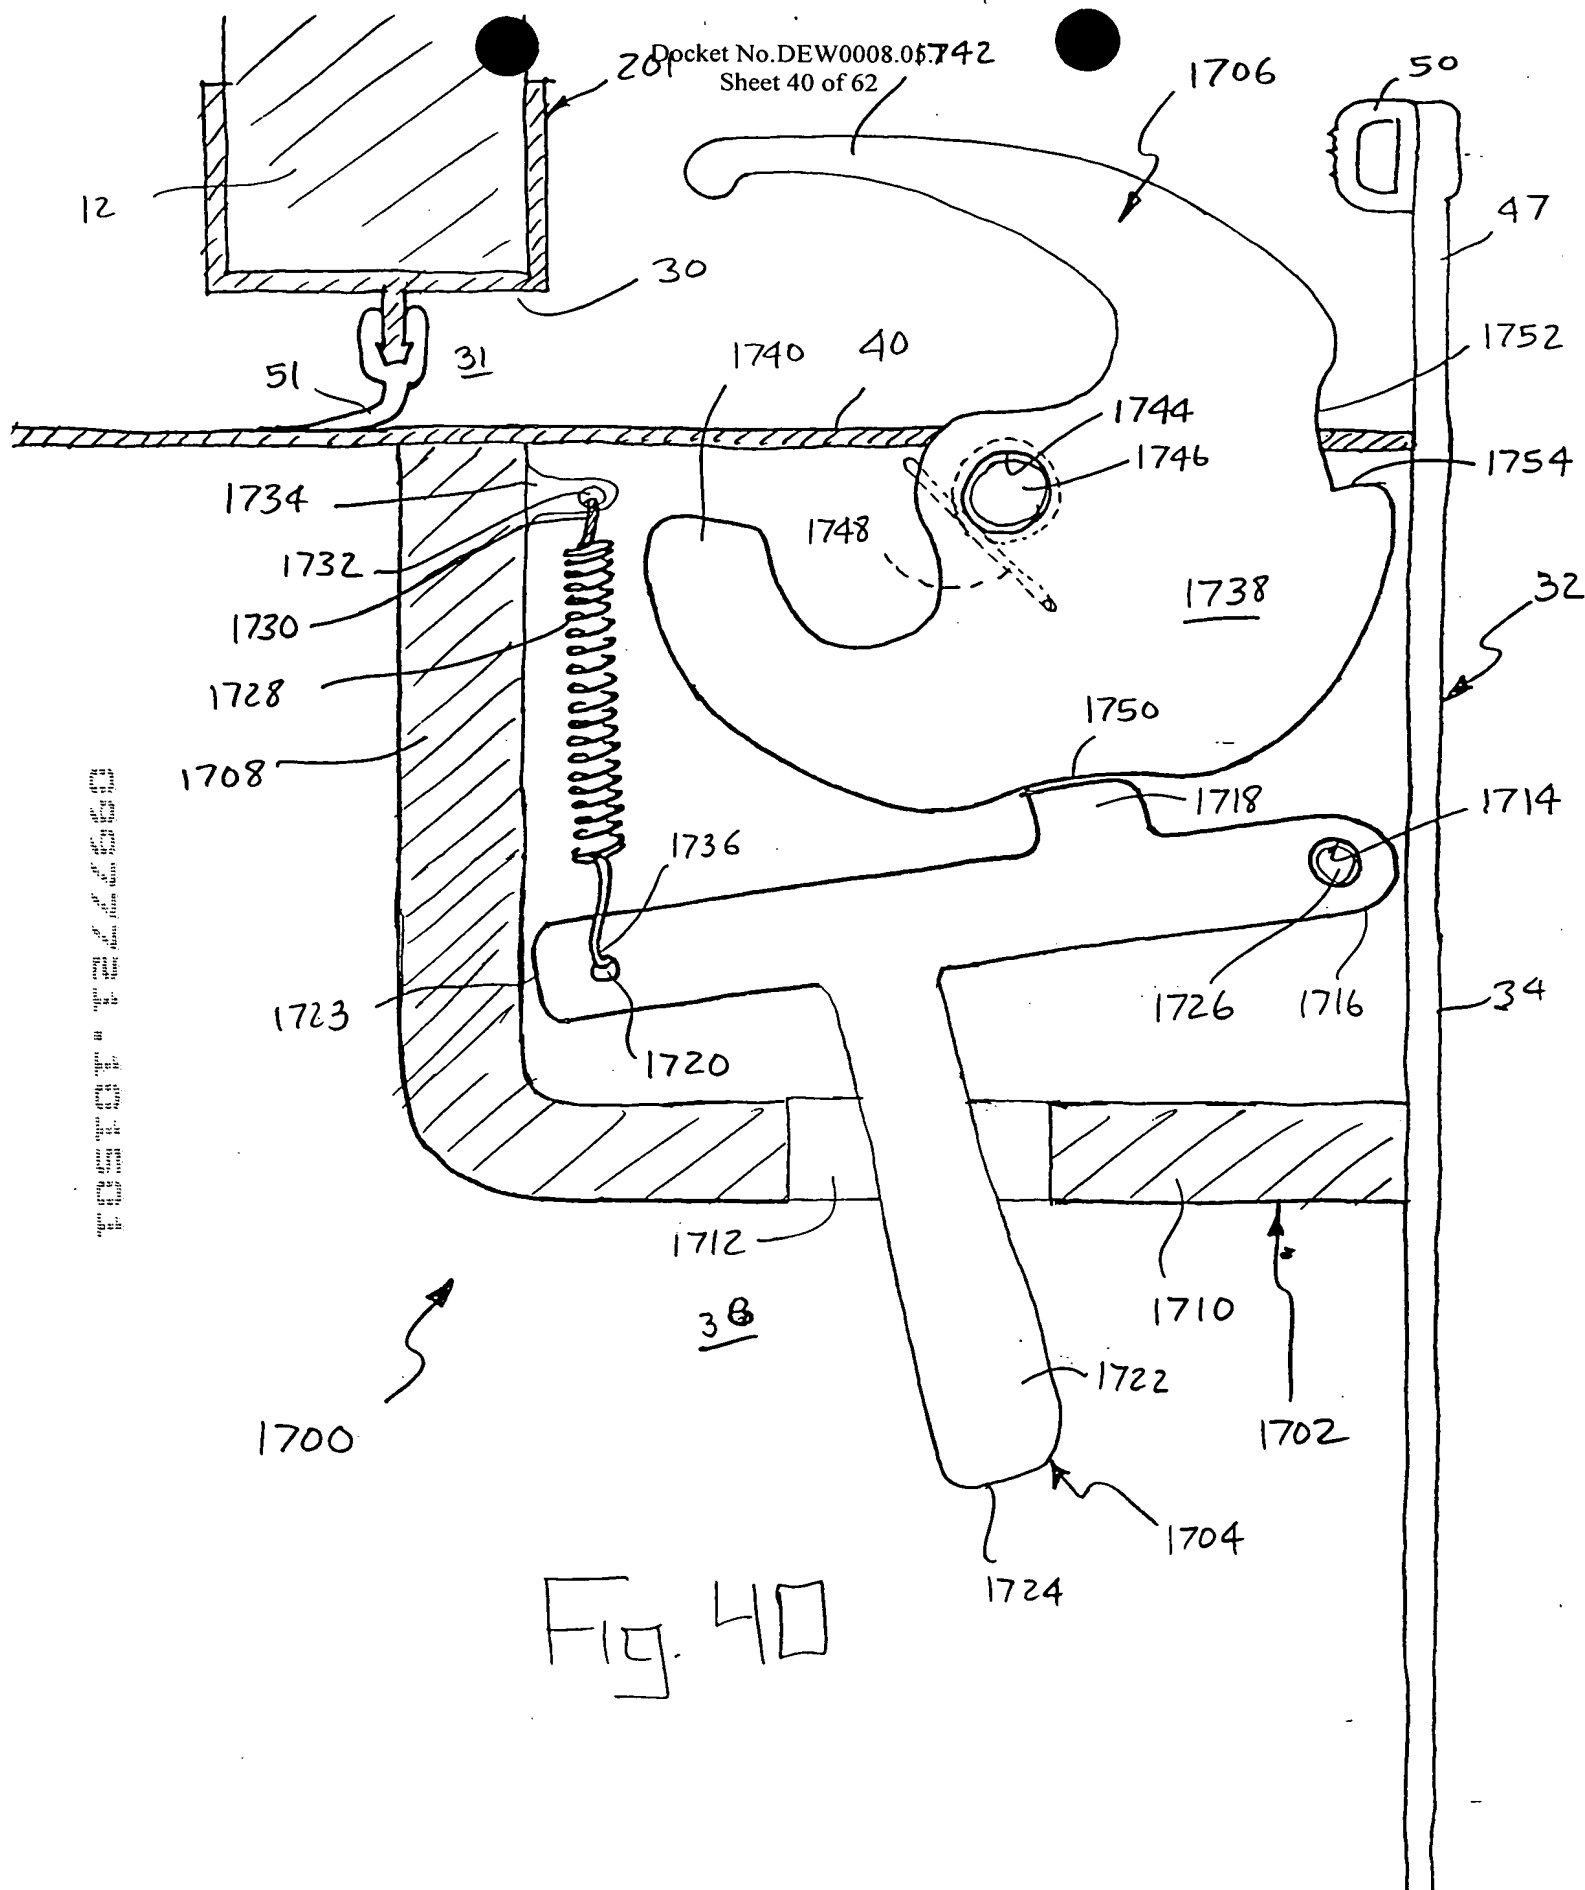


Fig. 40

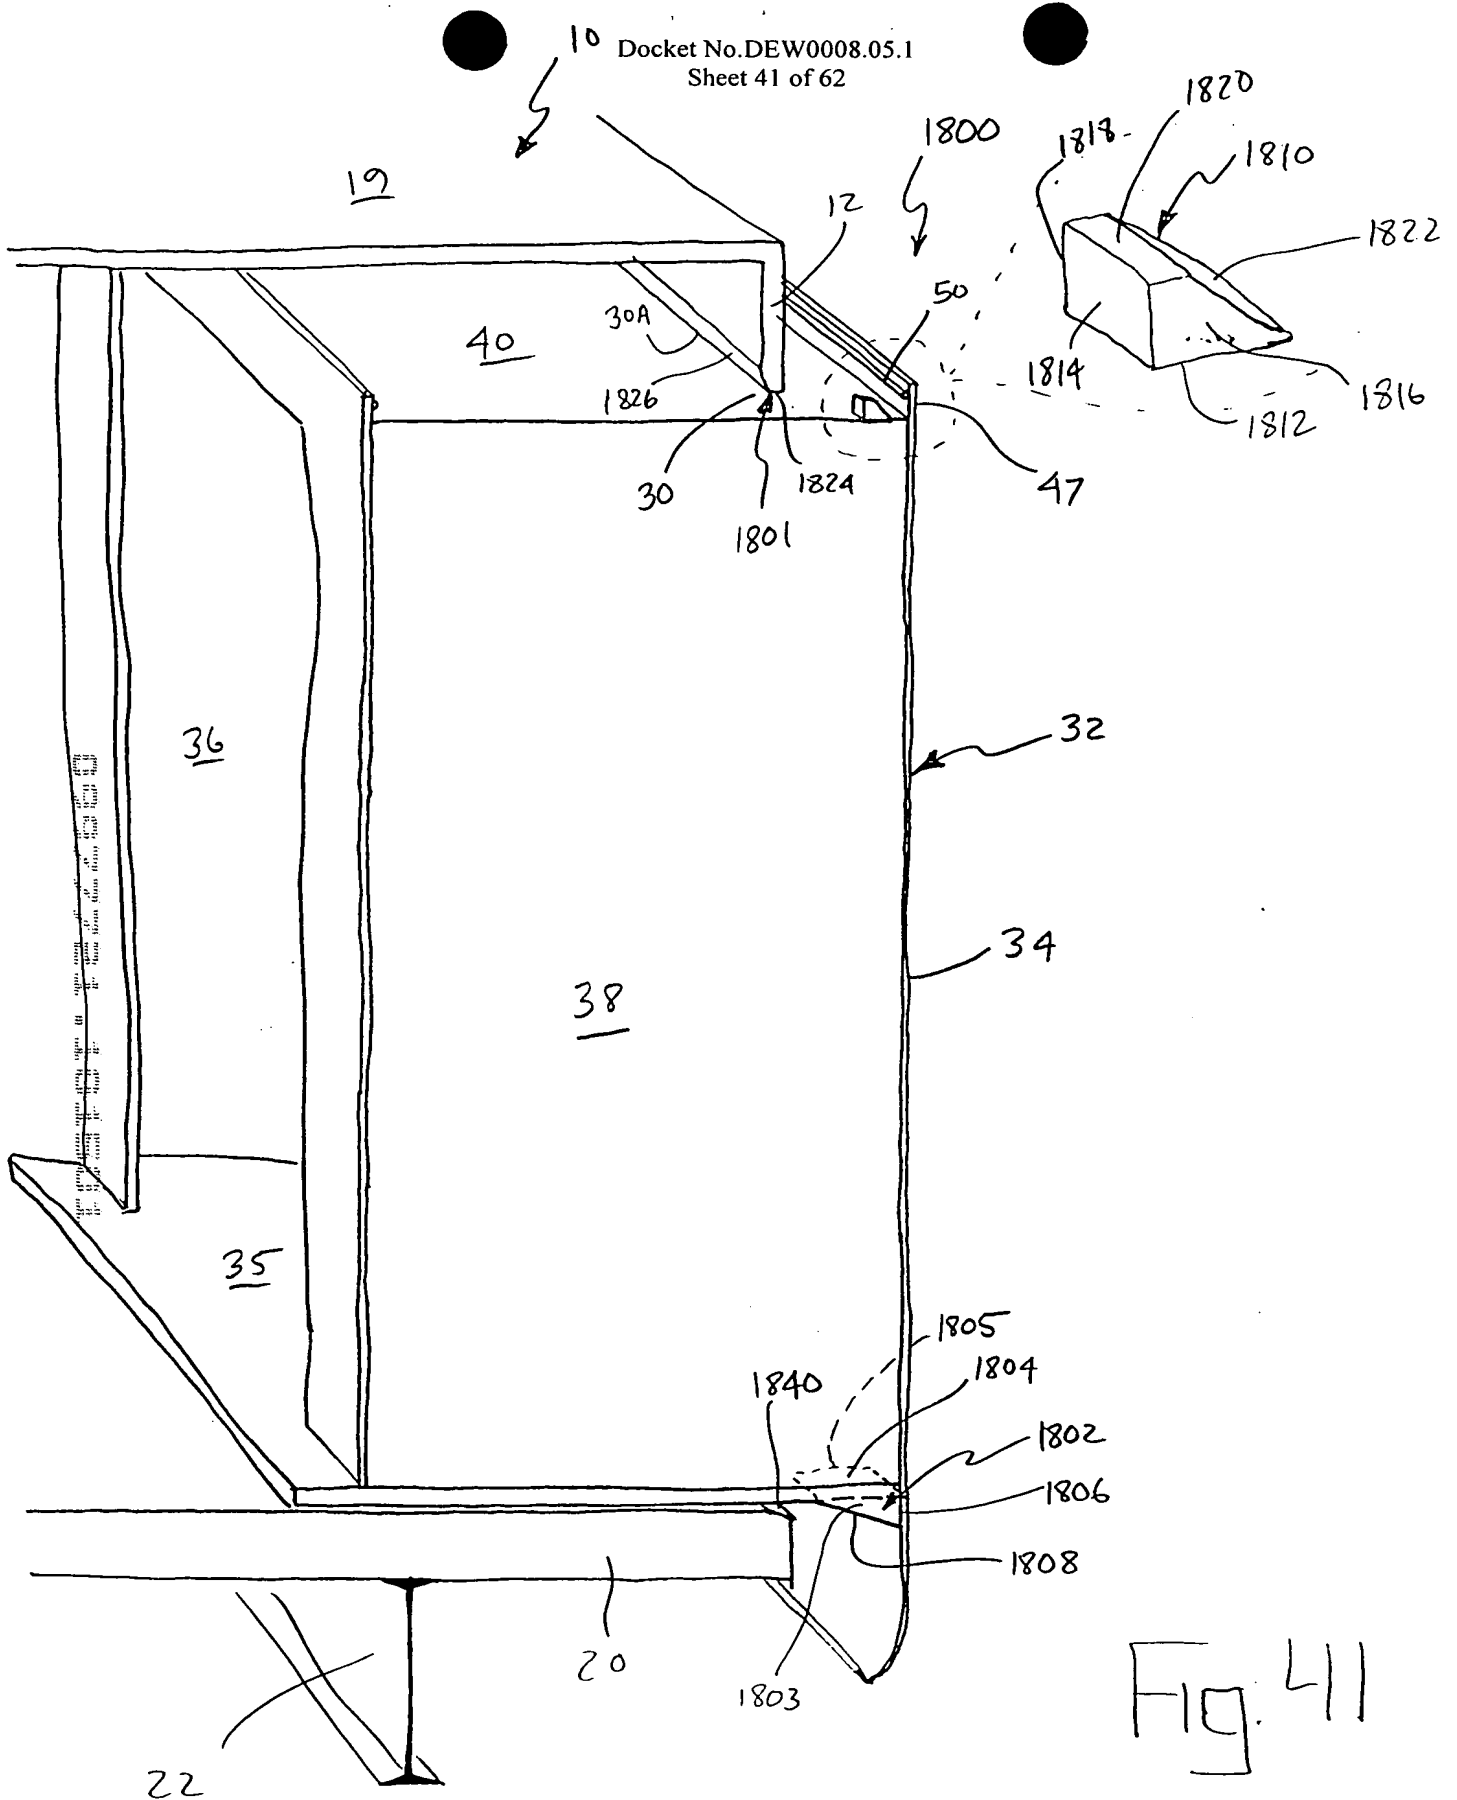


Fig. 41


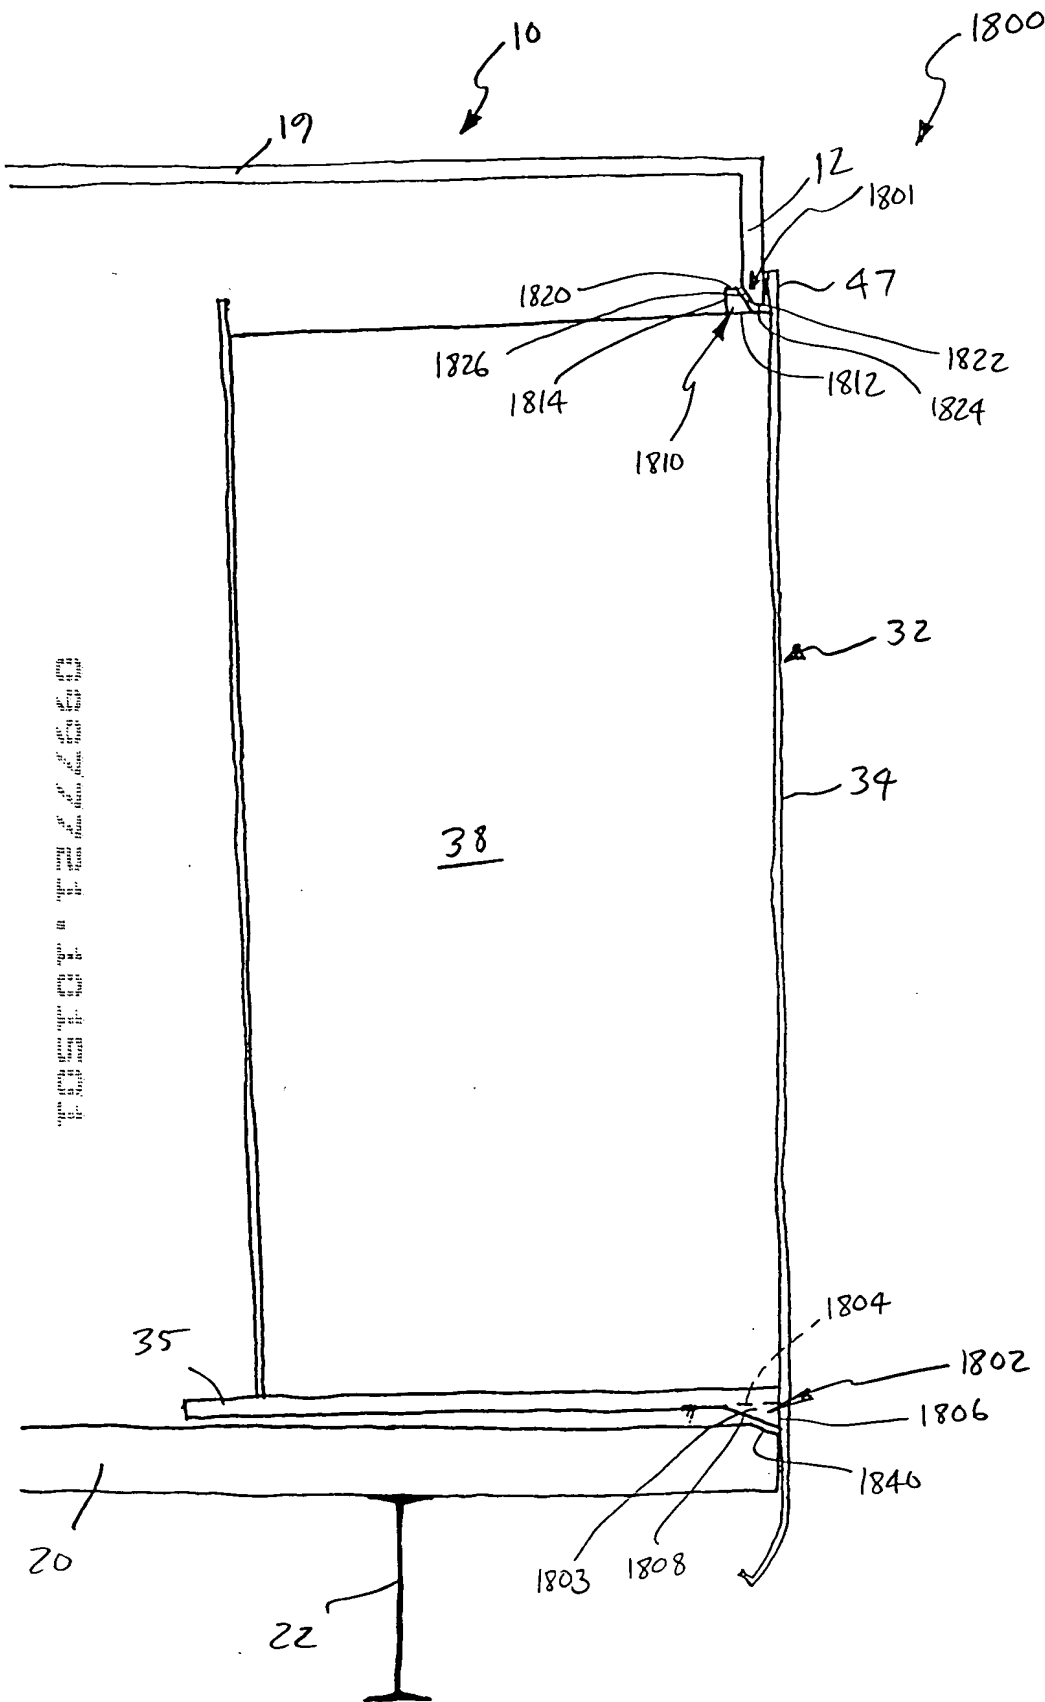


Fig. 42

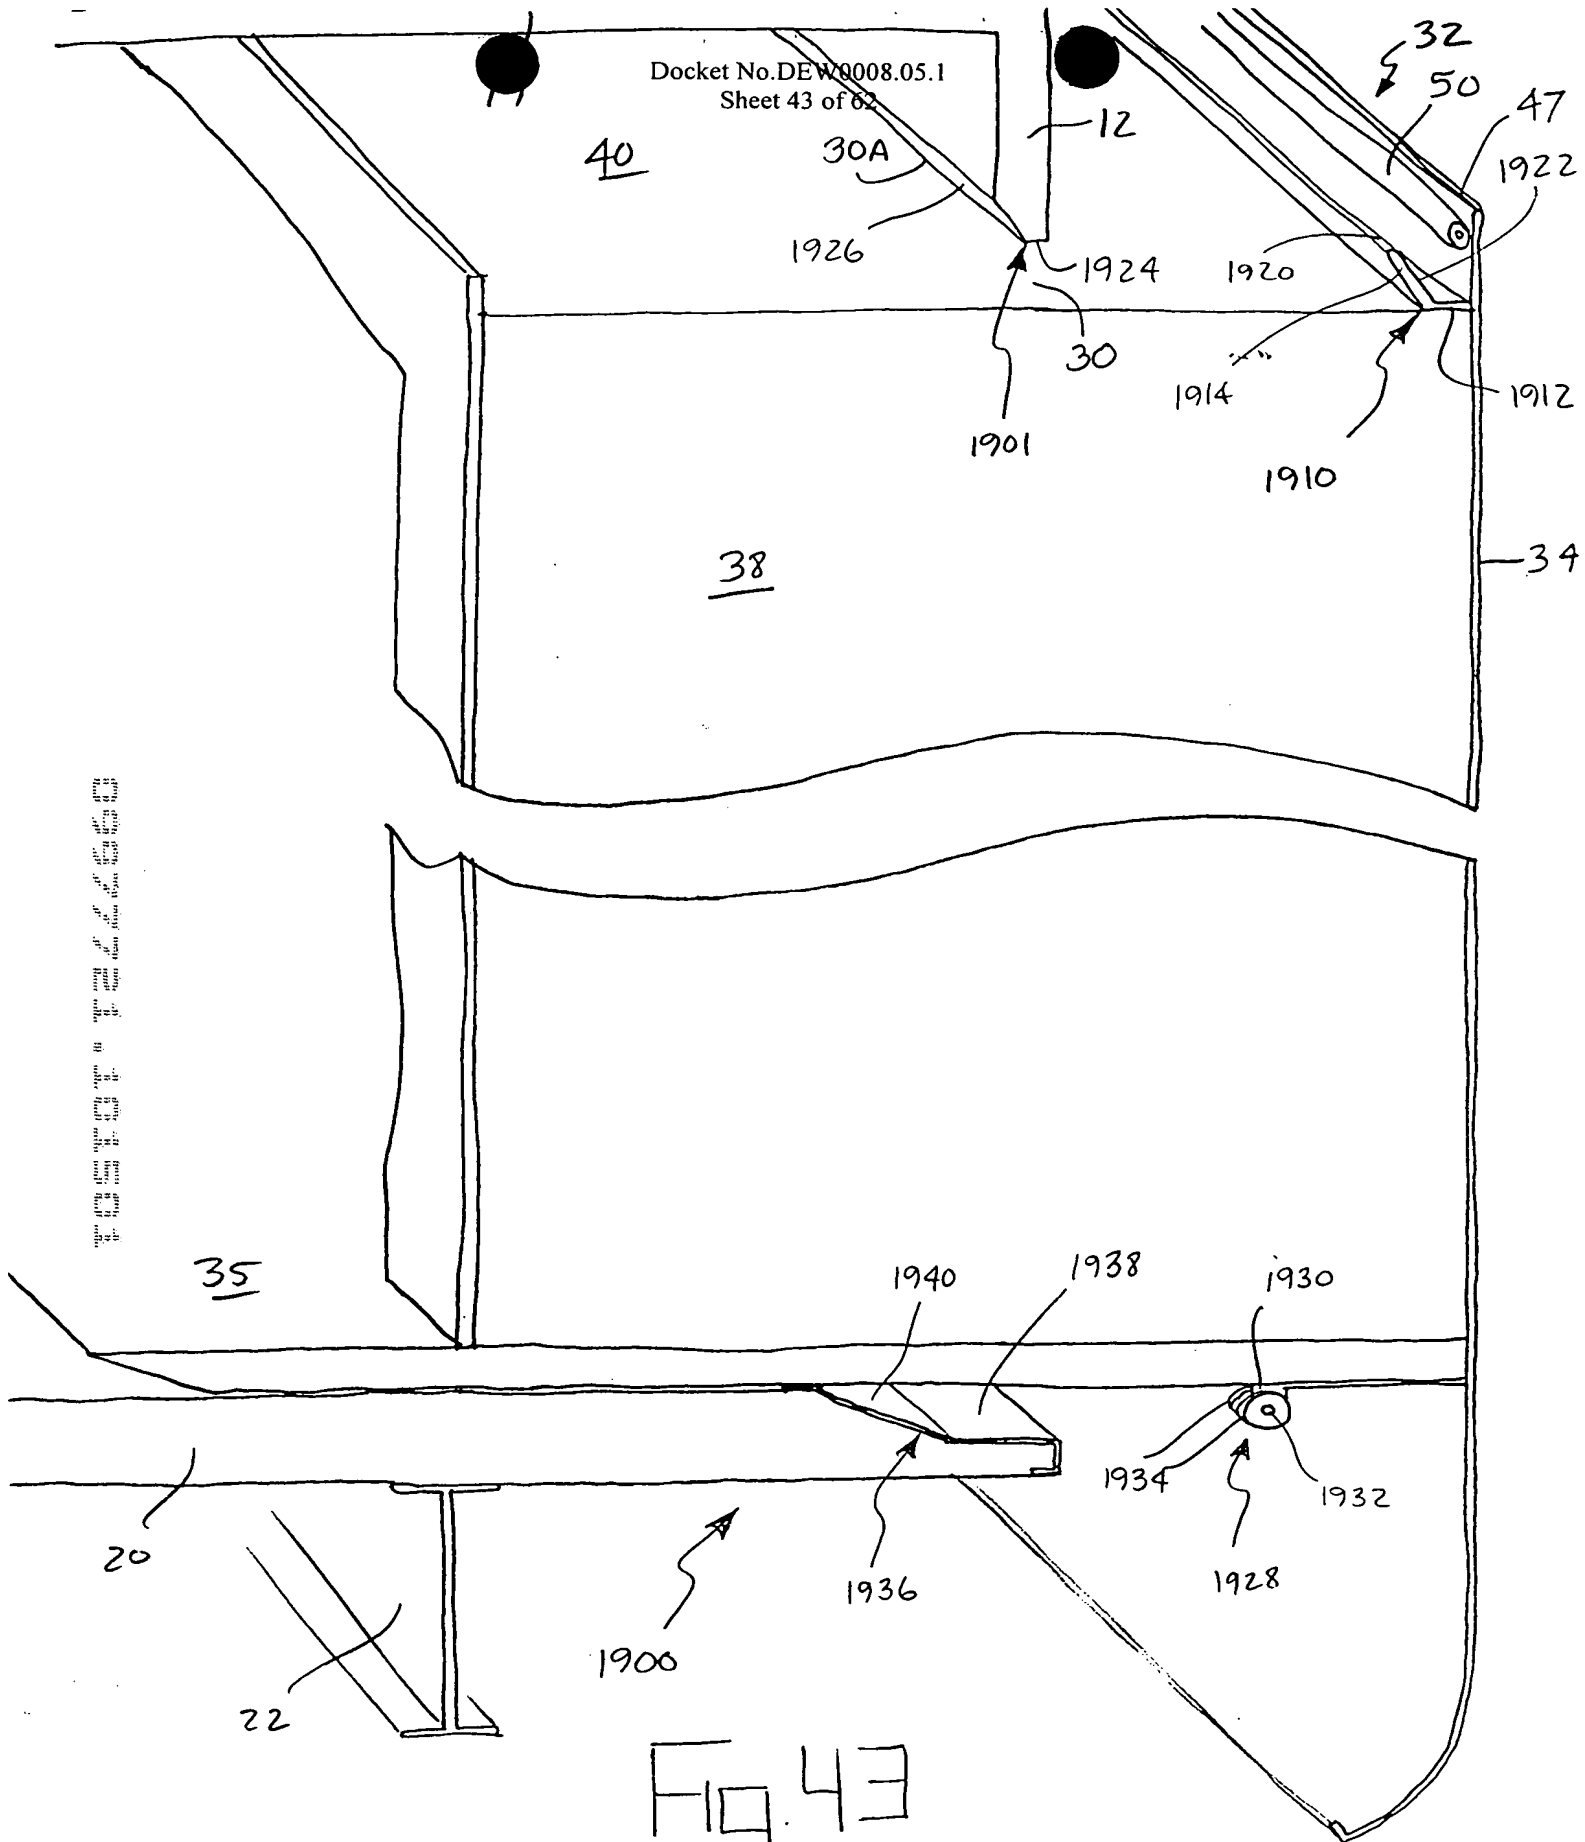

19

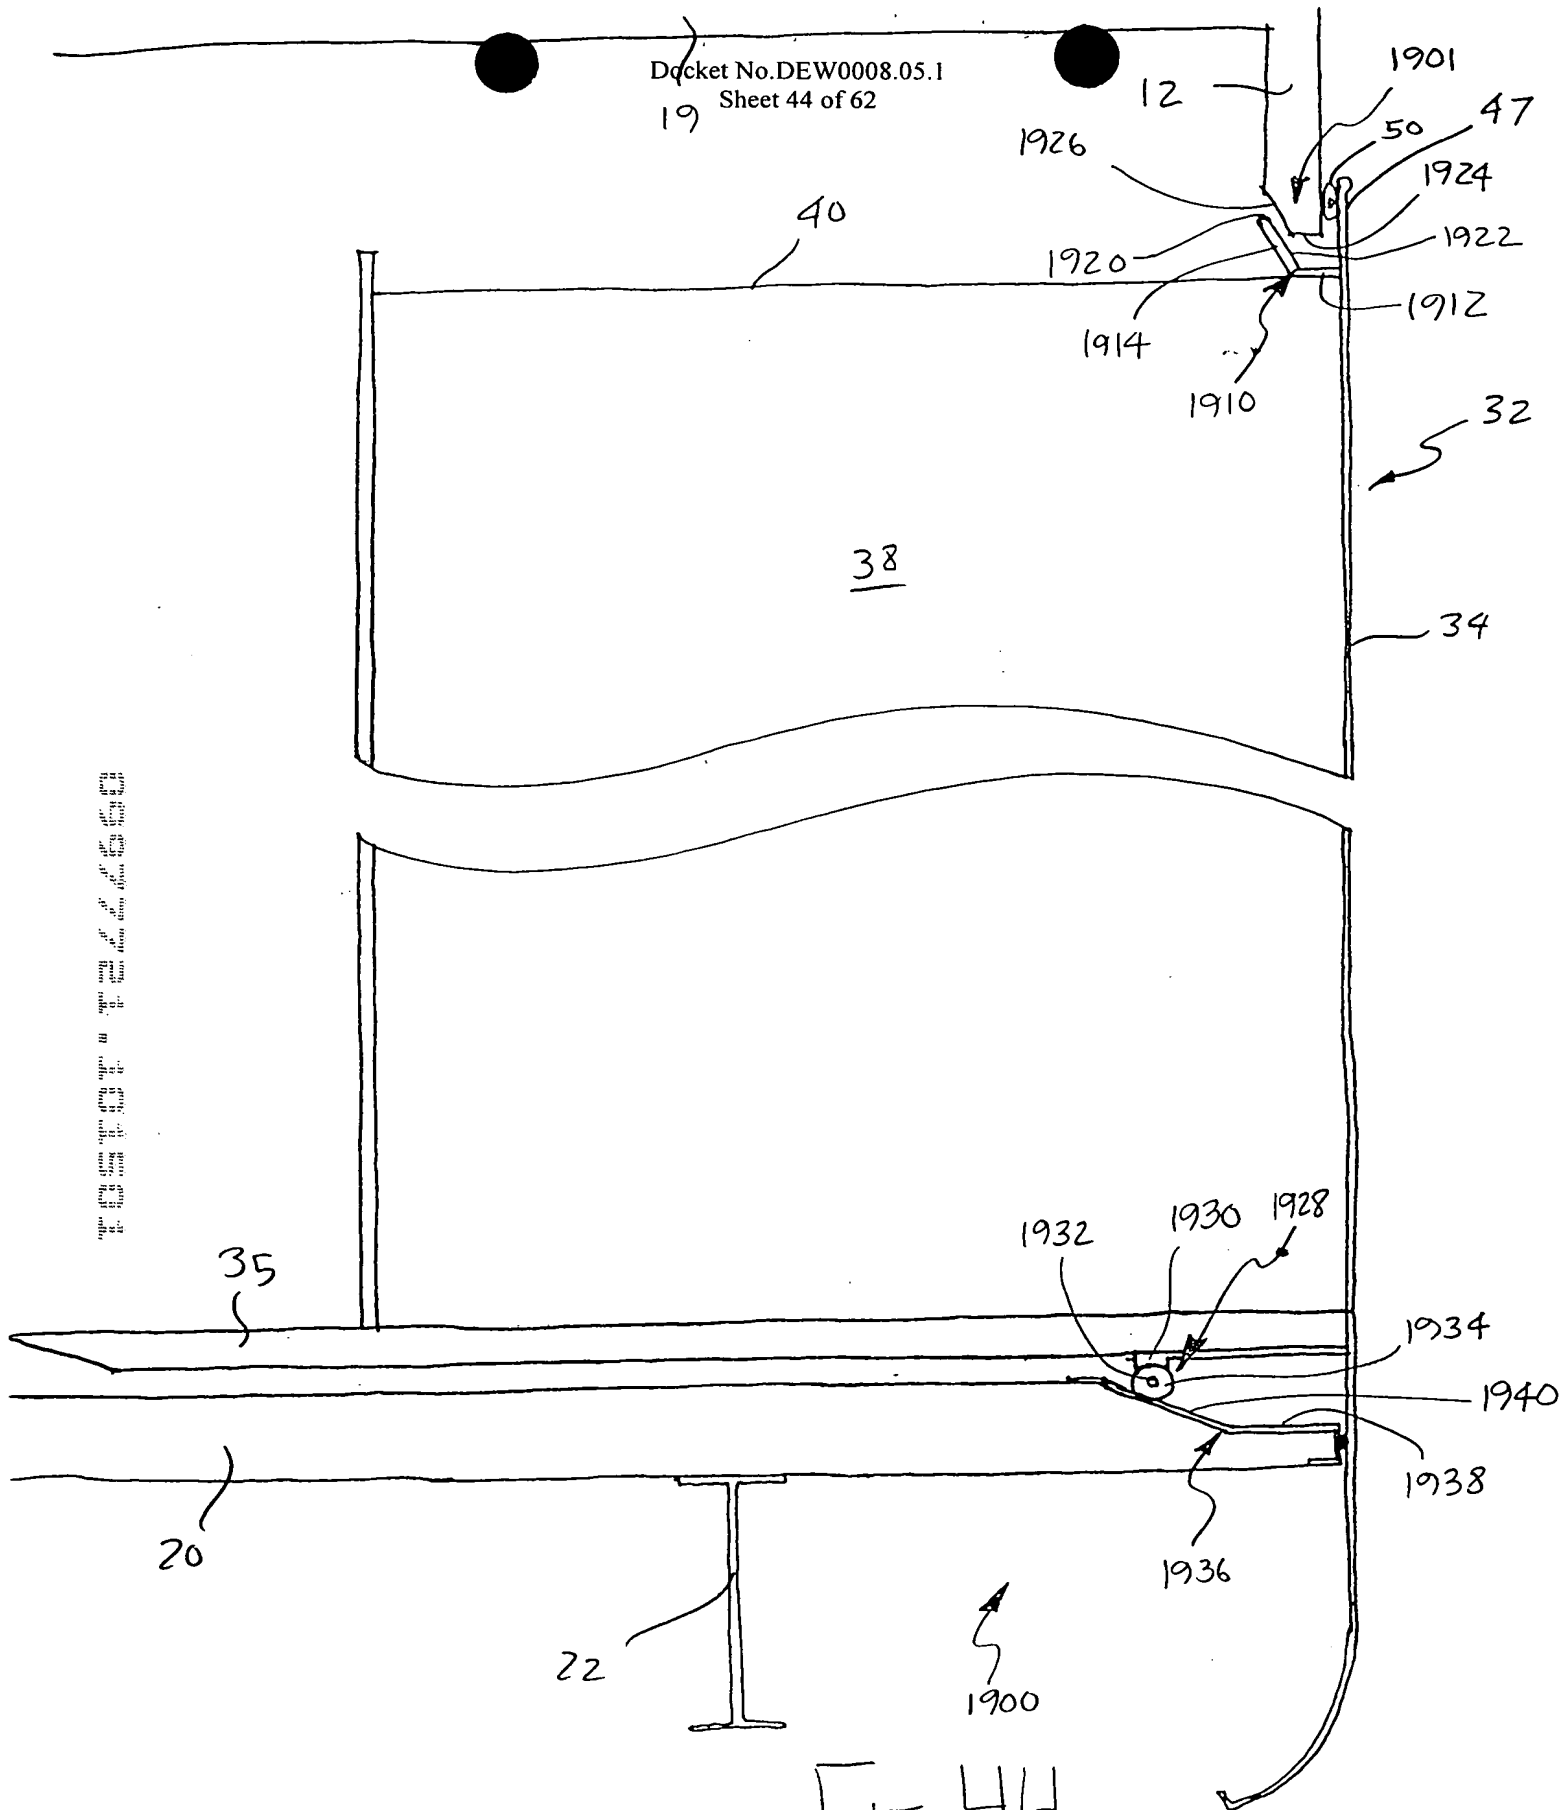


Fig. 44



12

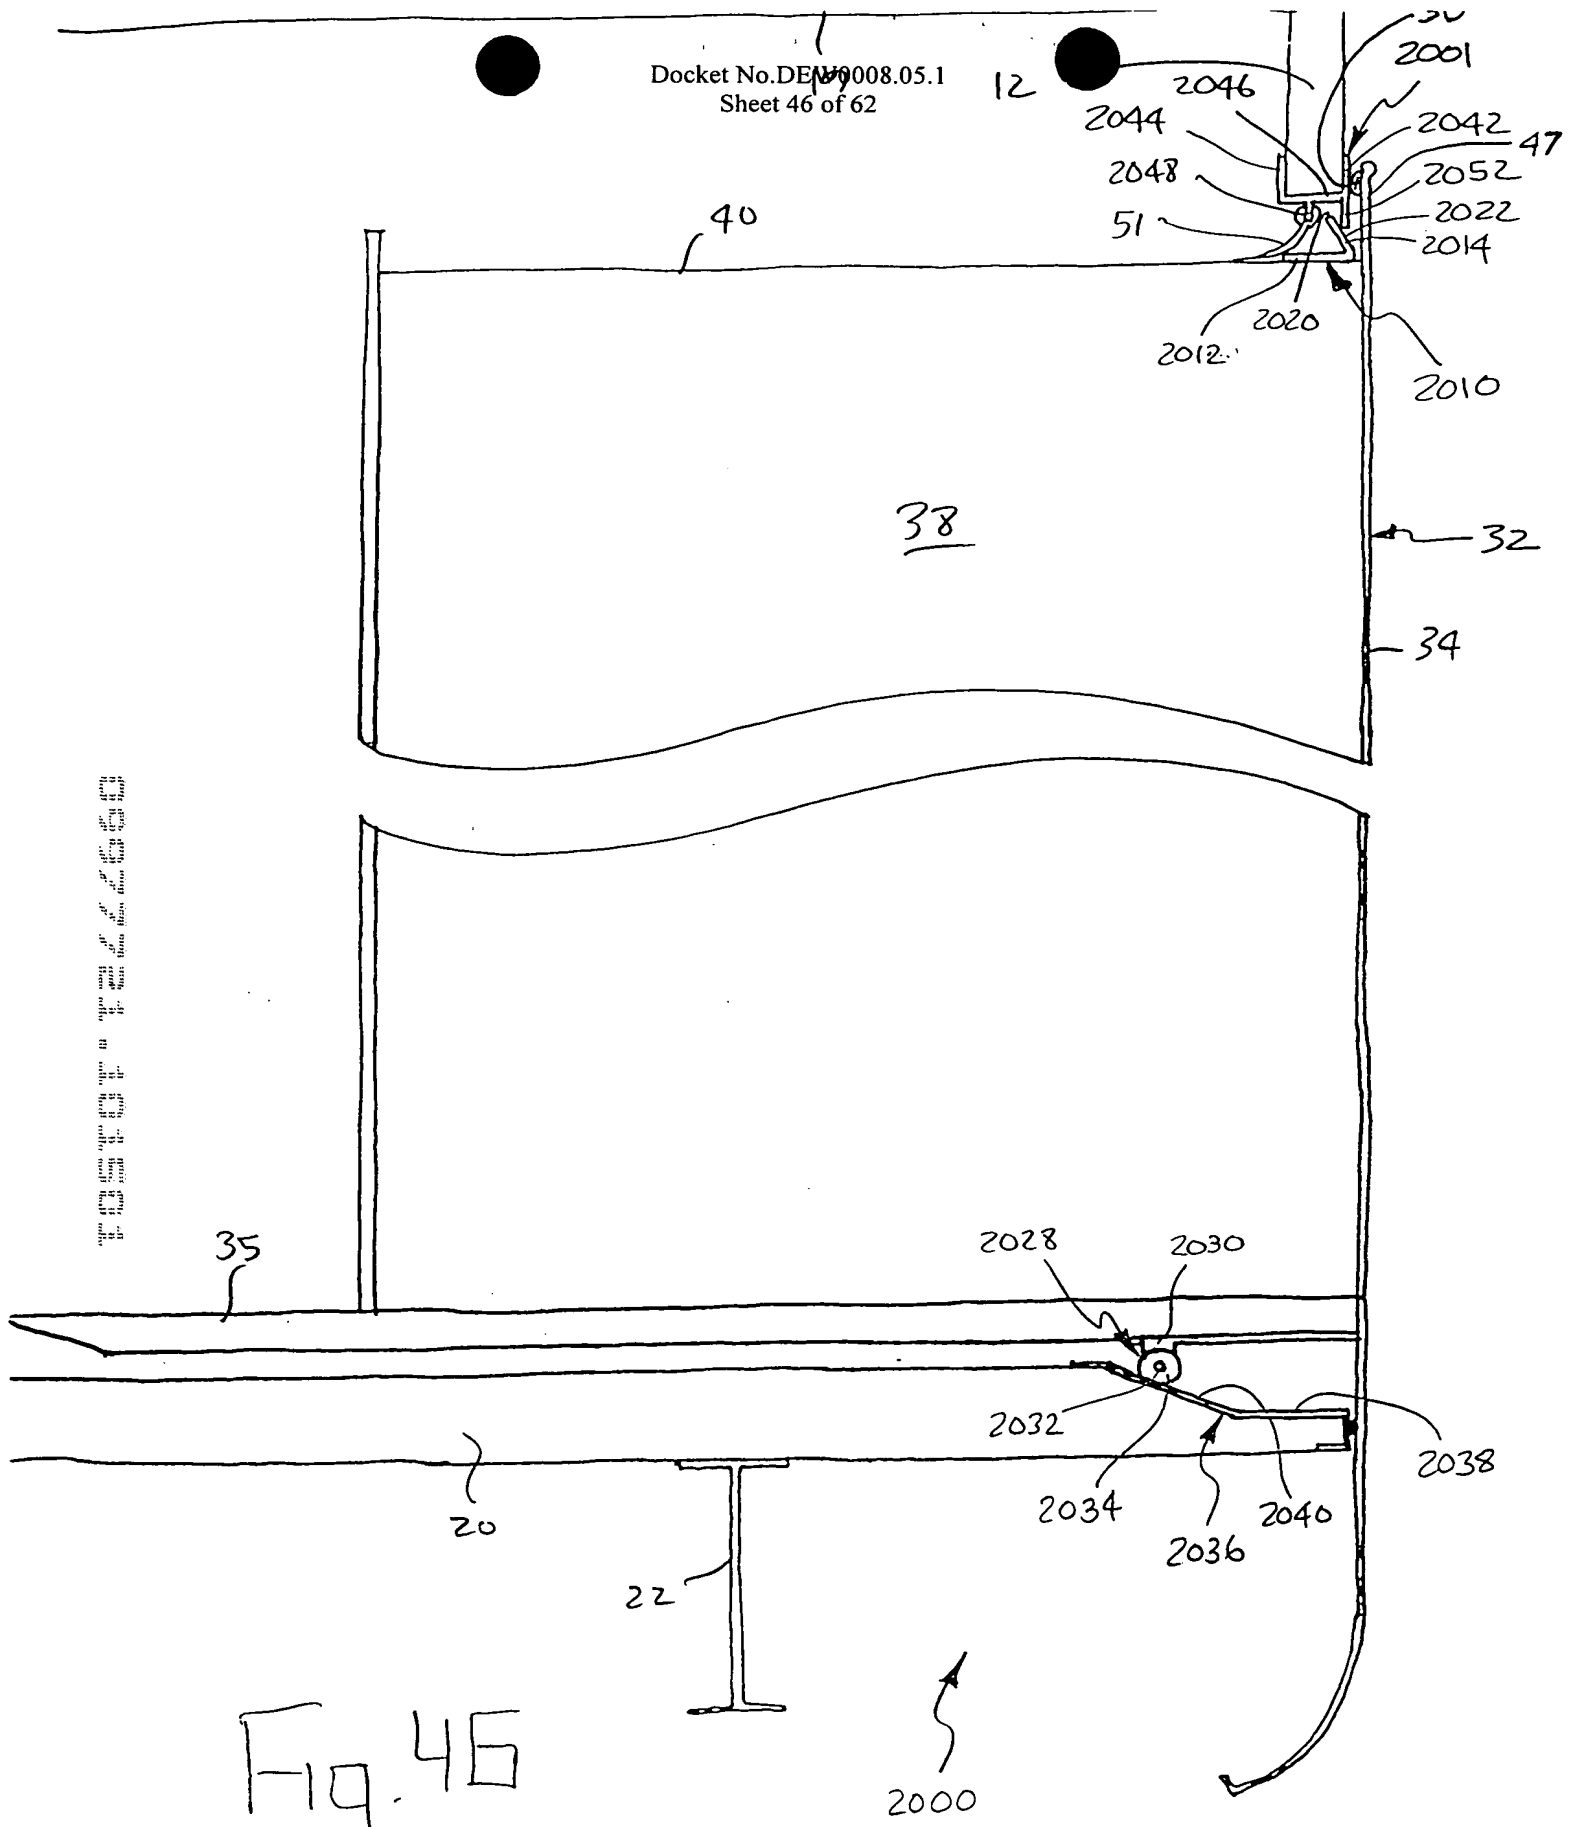


Fig. 46

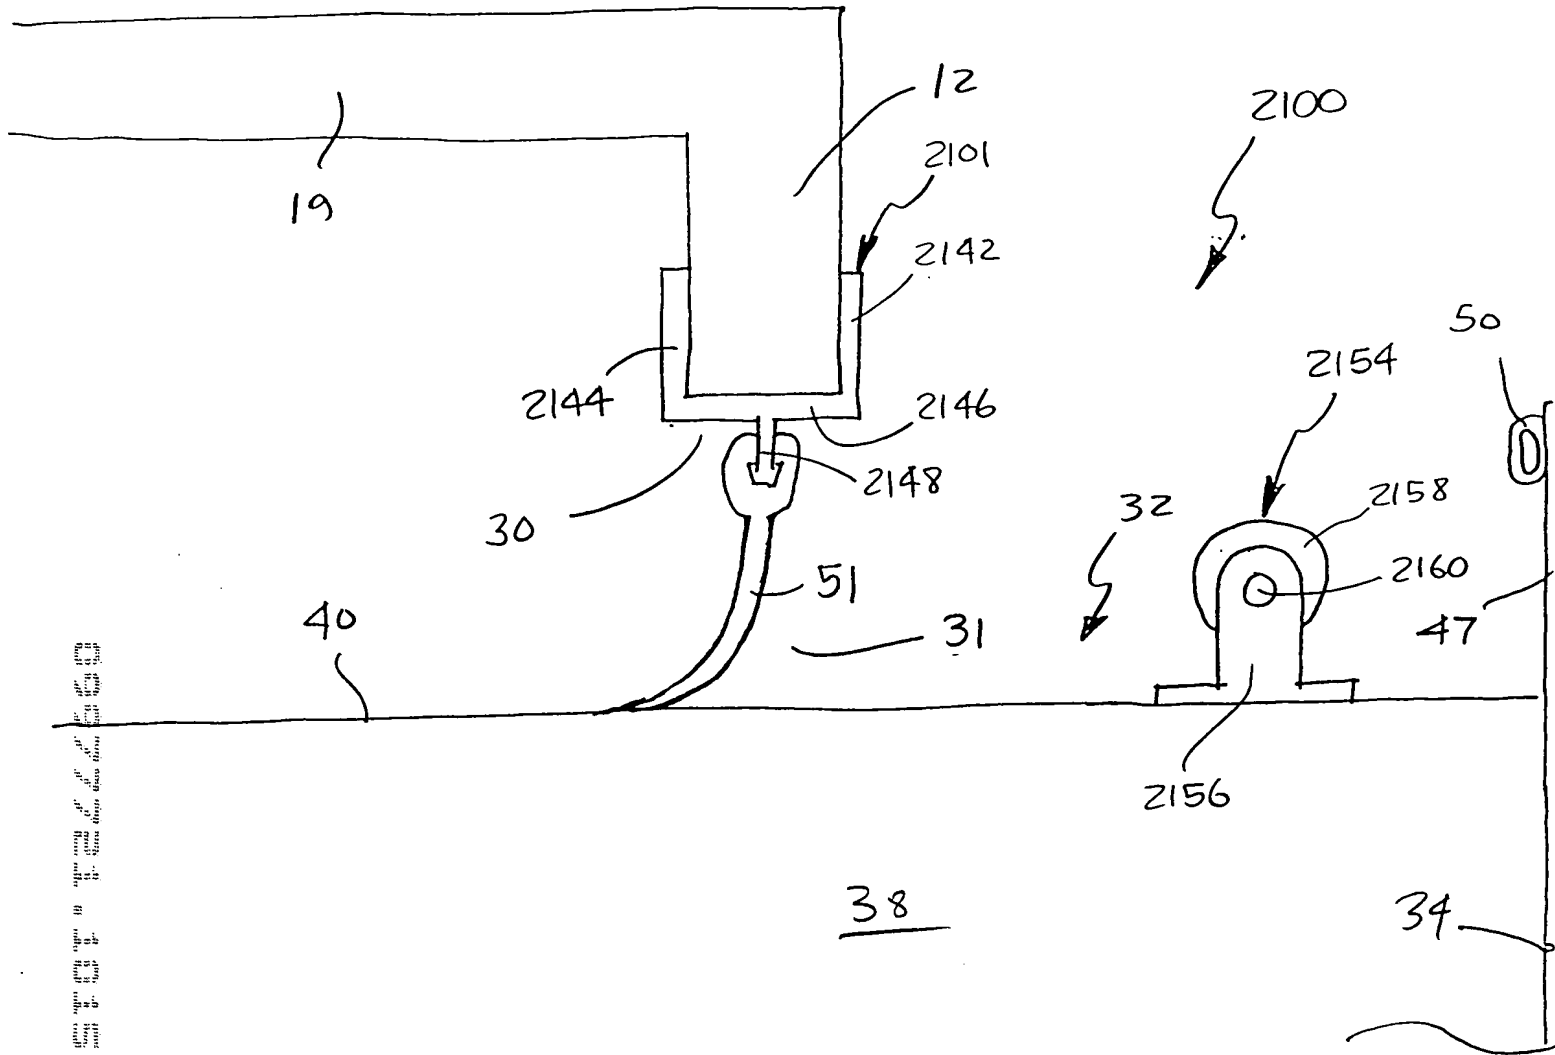
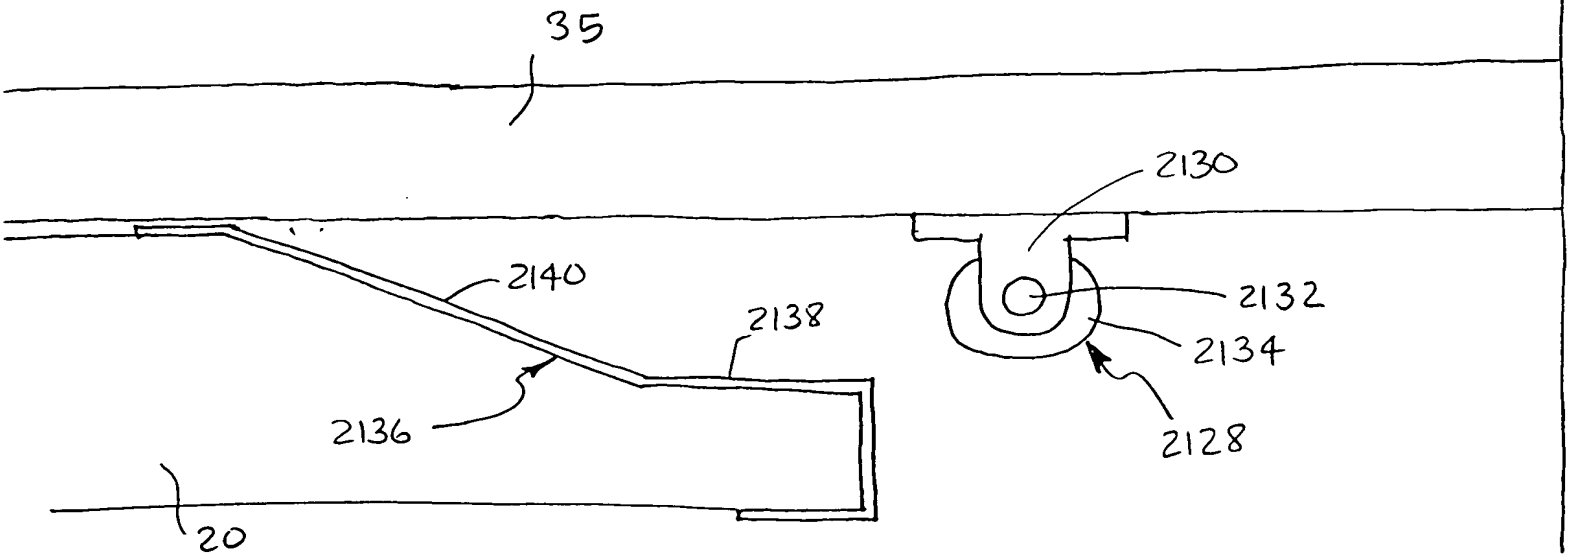


Fig. 47



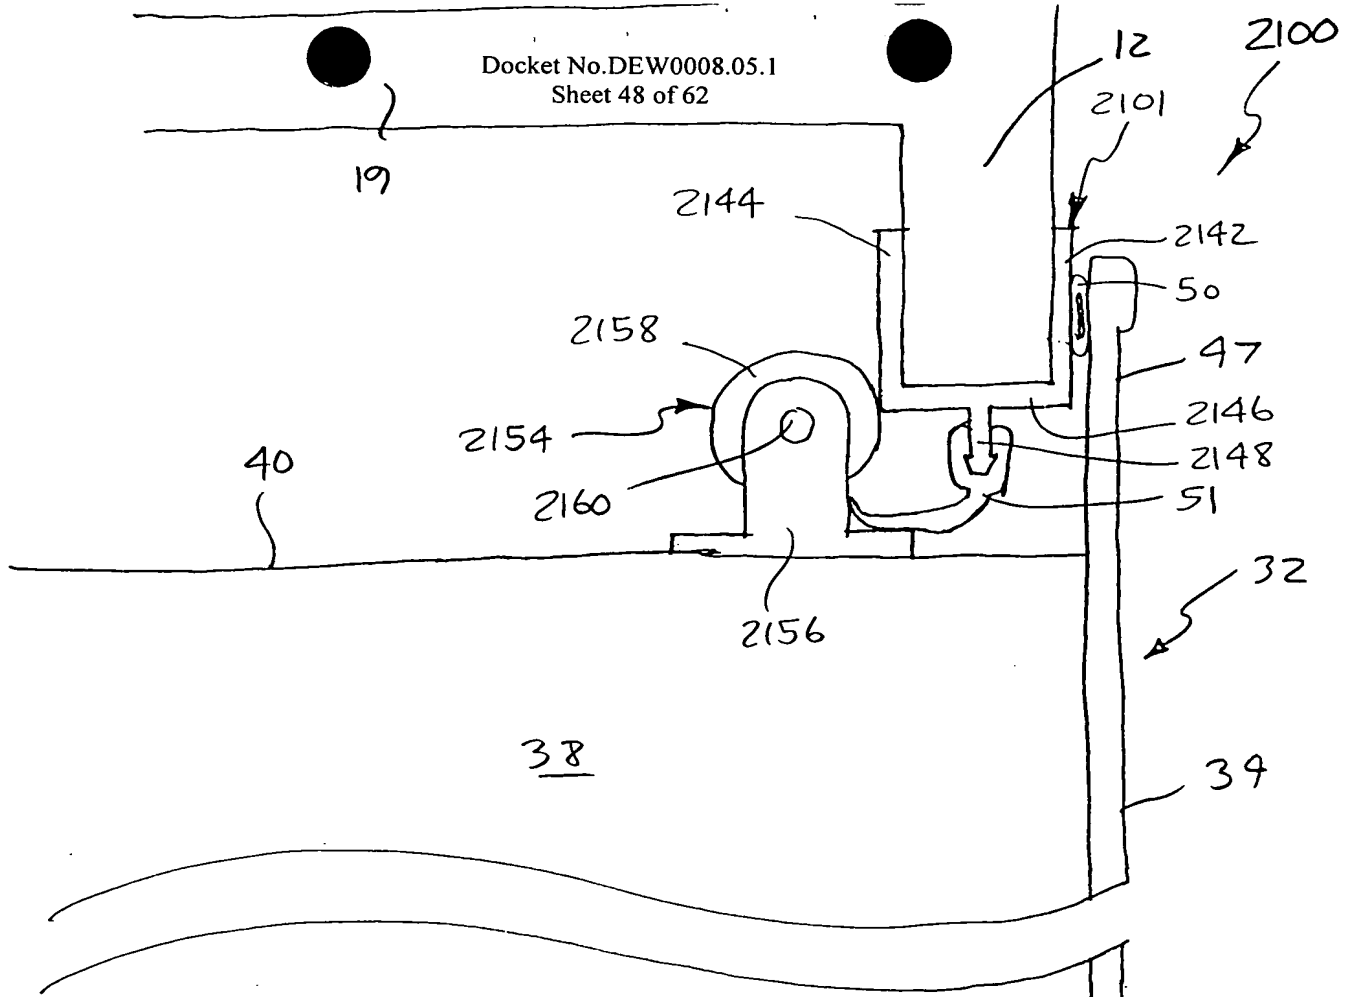
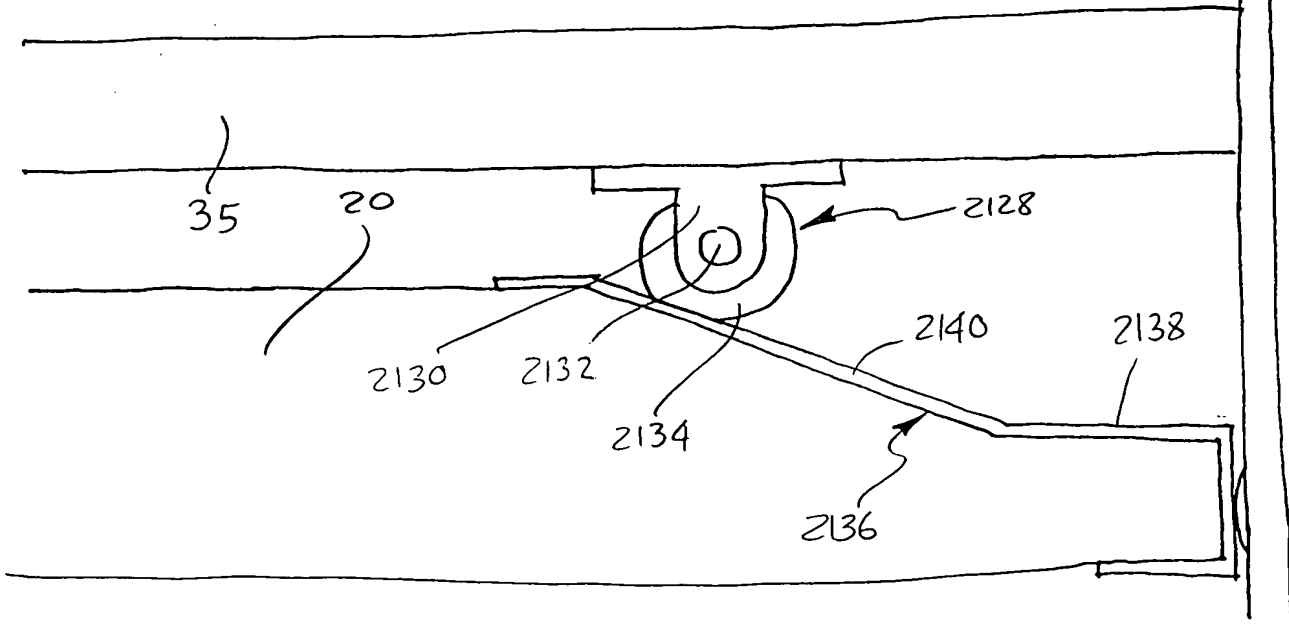


Fig 4A



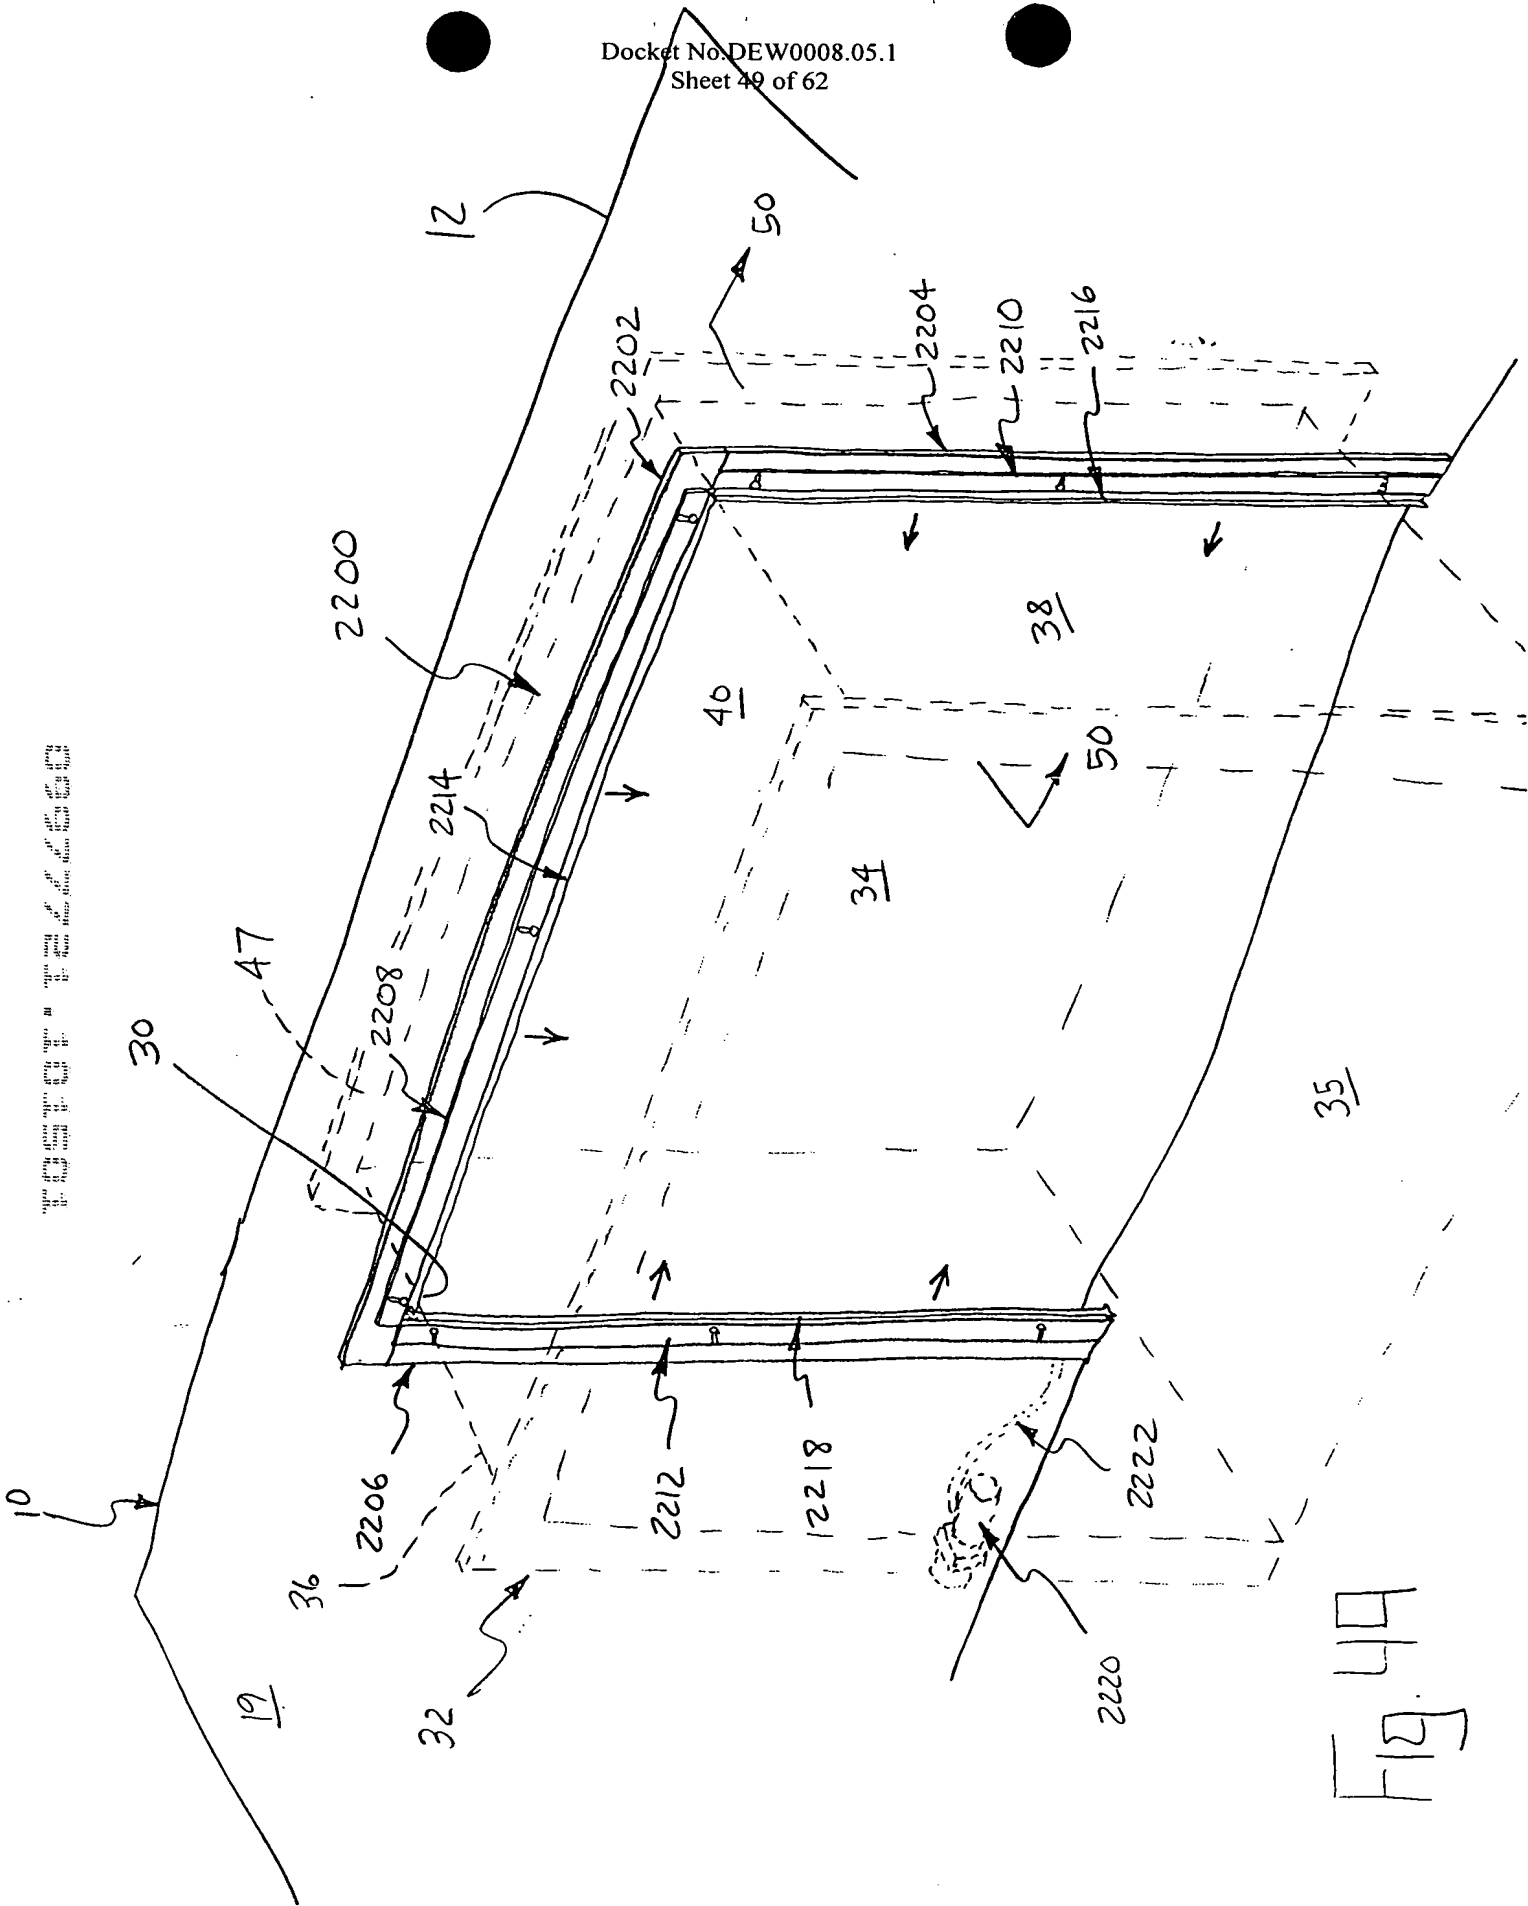



FIG. 49






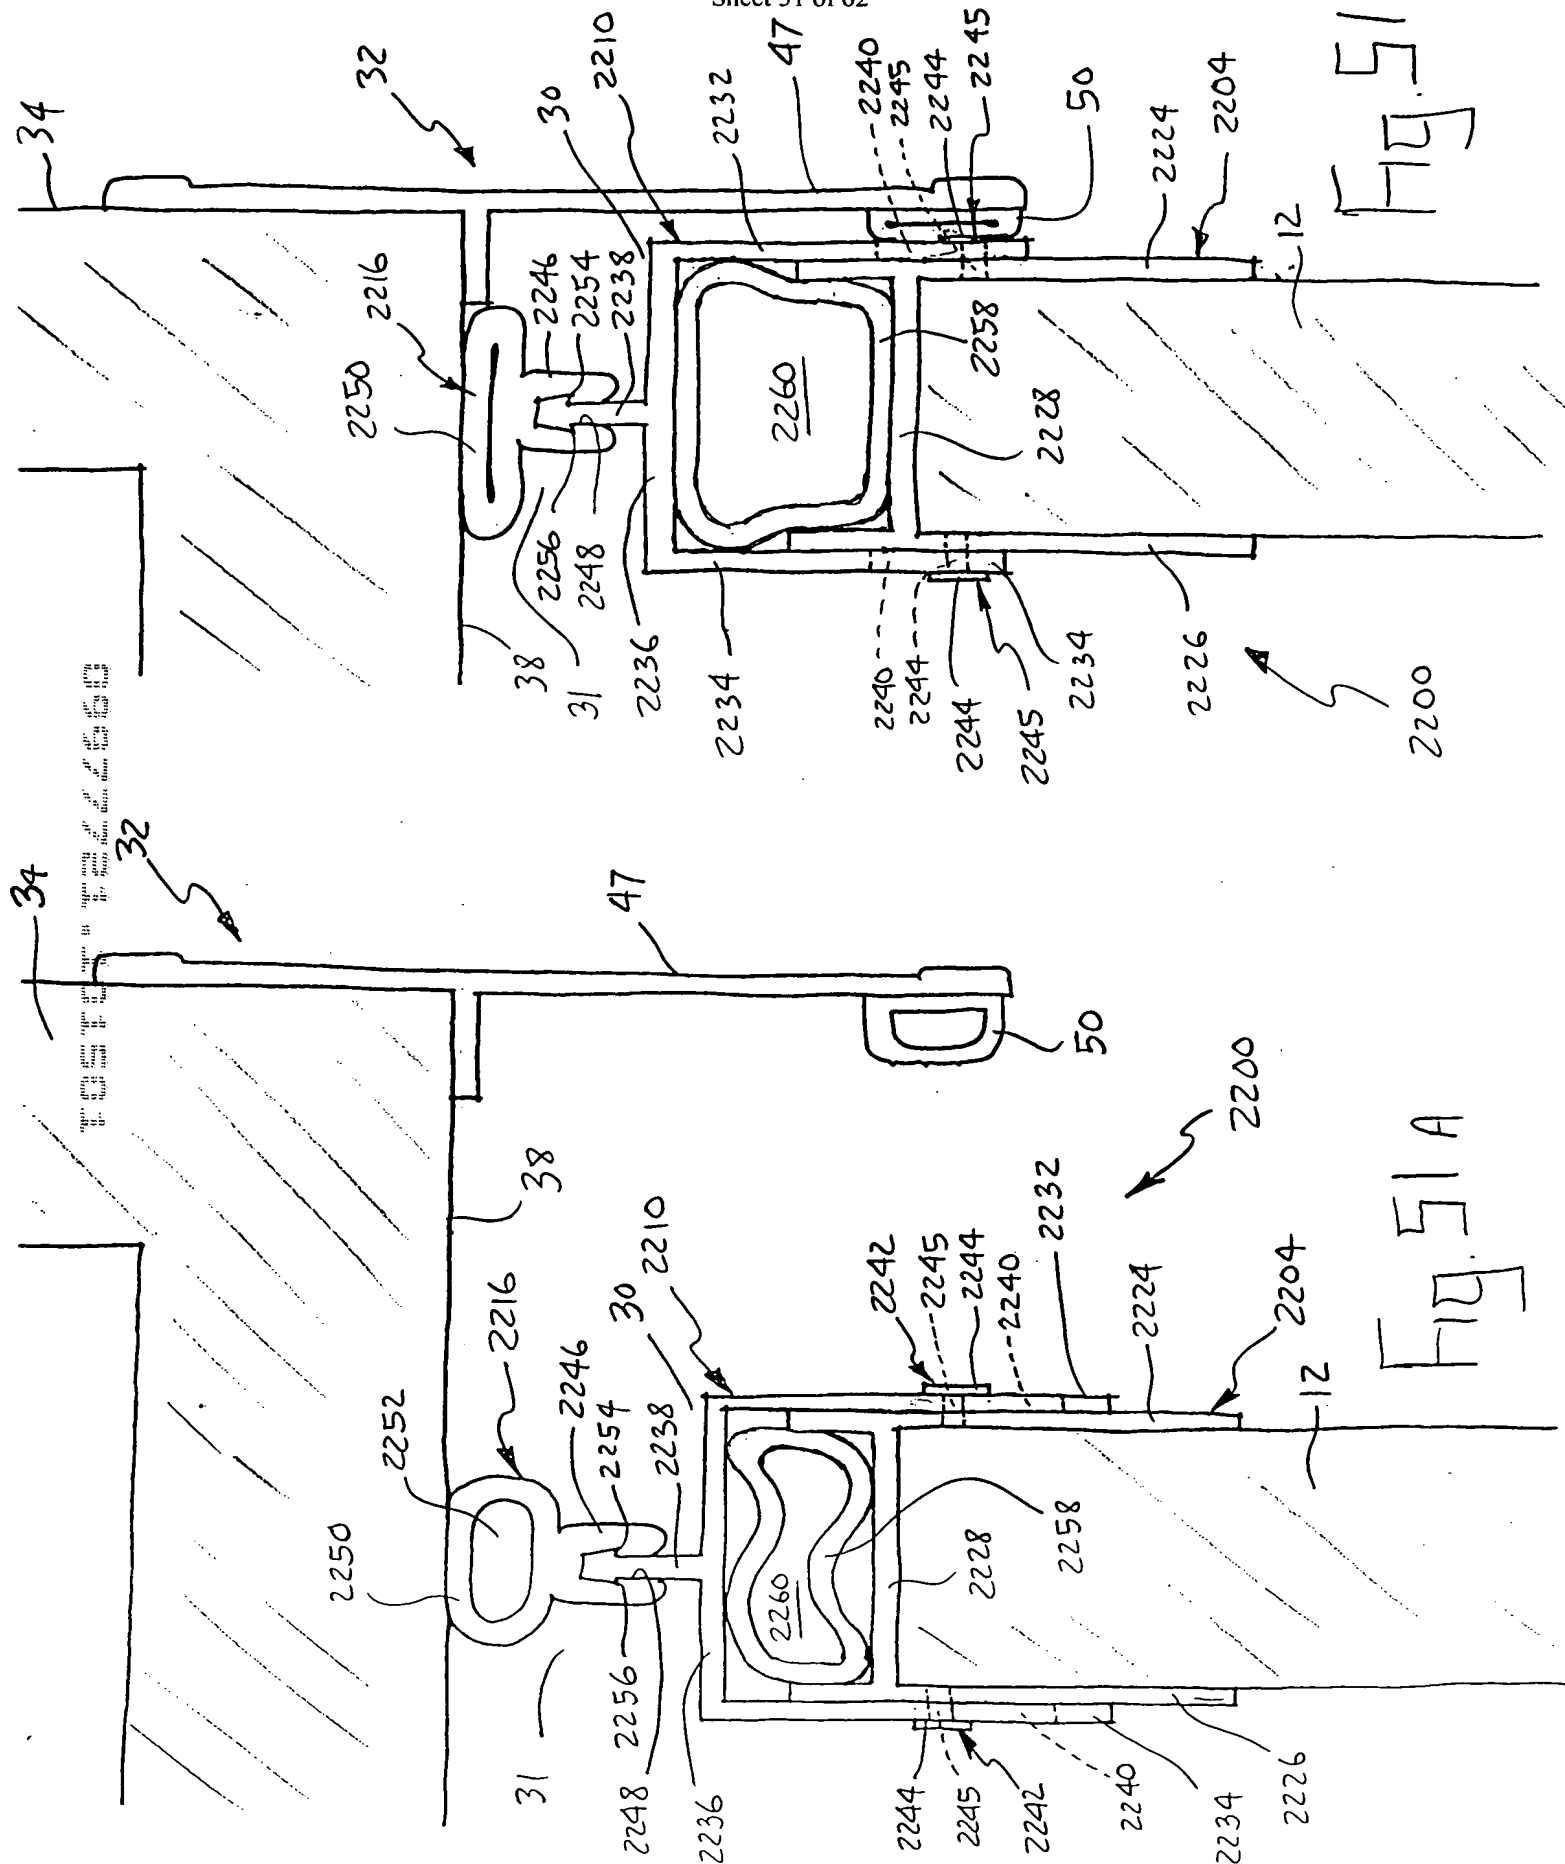



Fig 51A

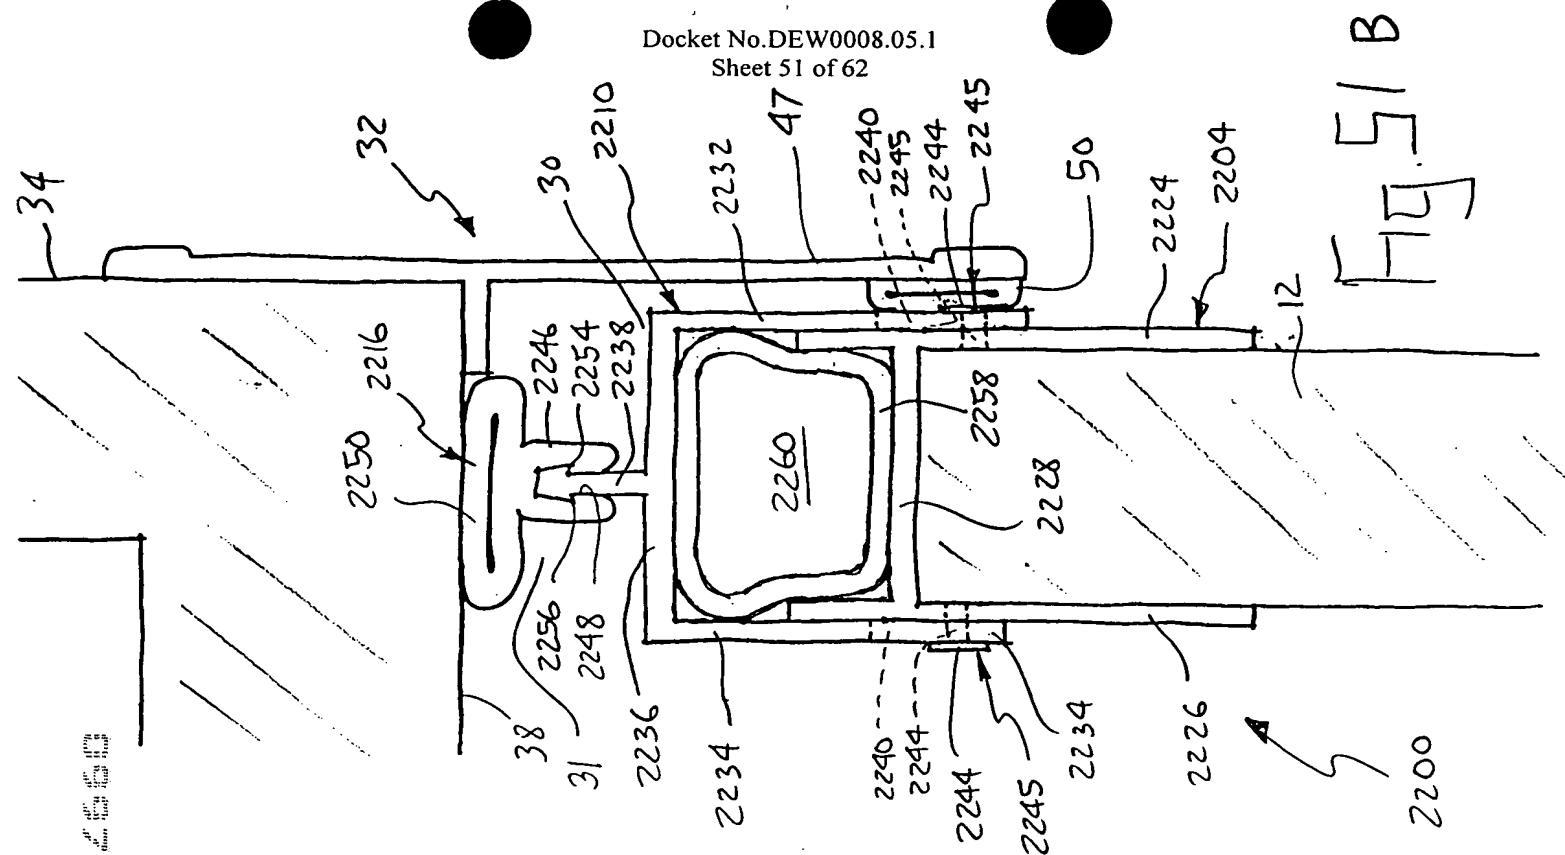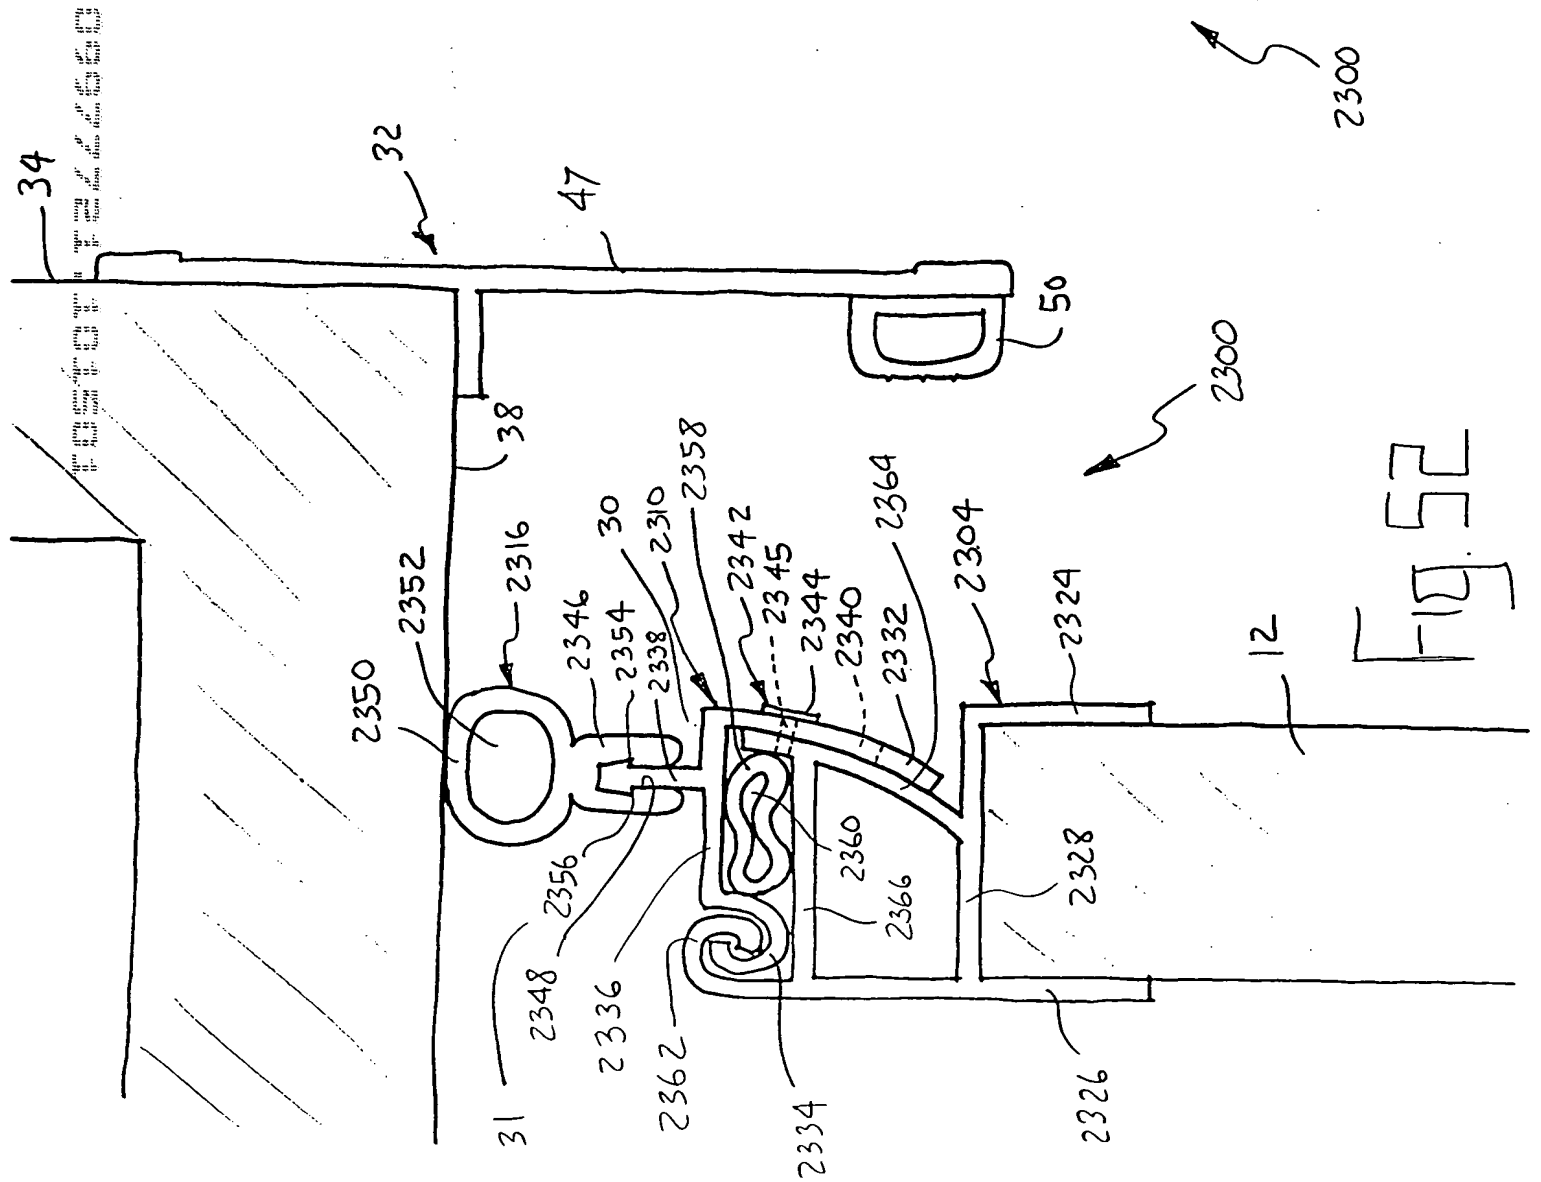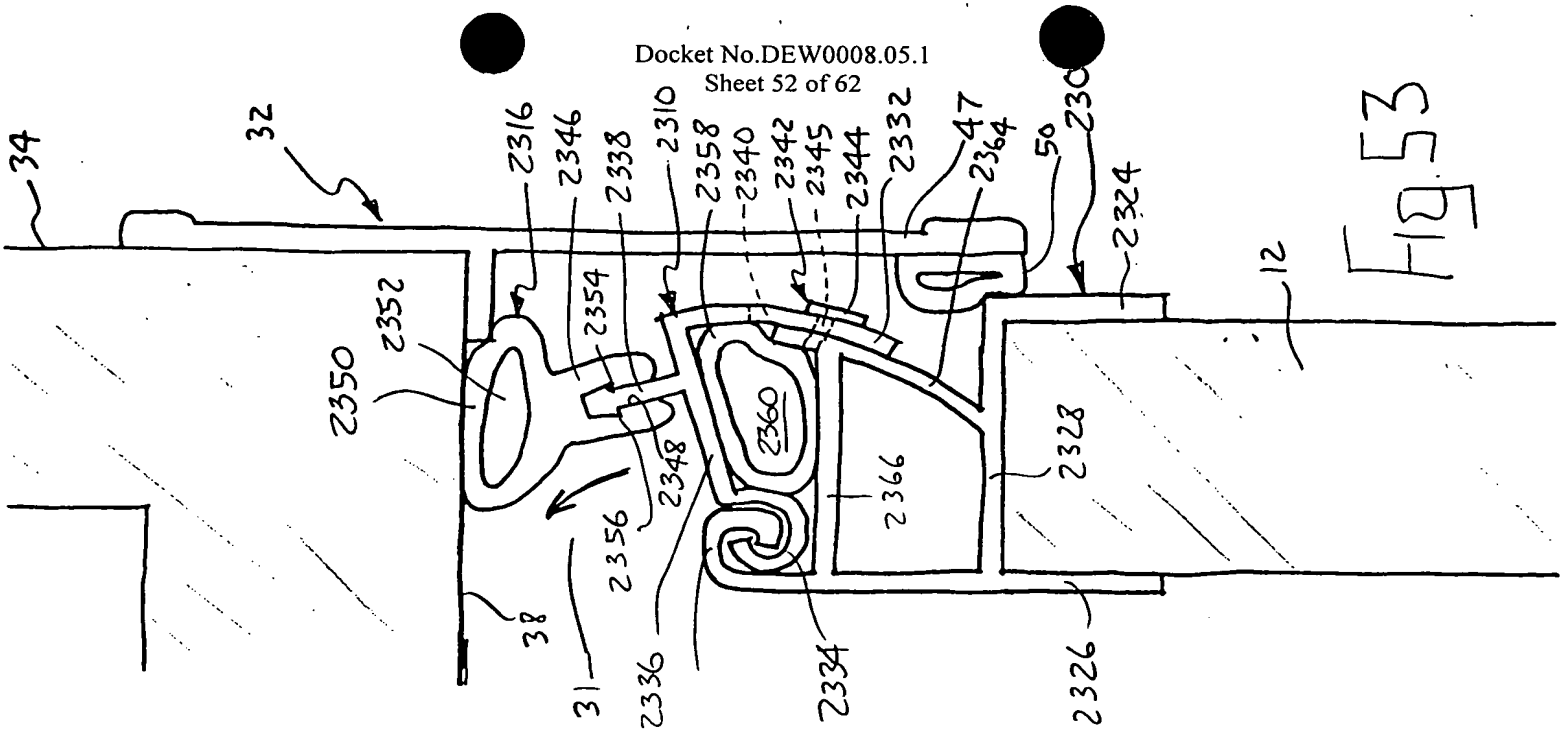



5/5/15

4



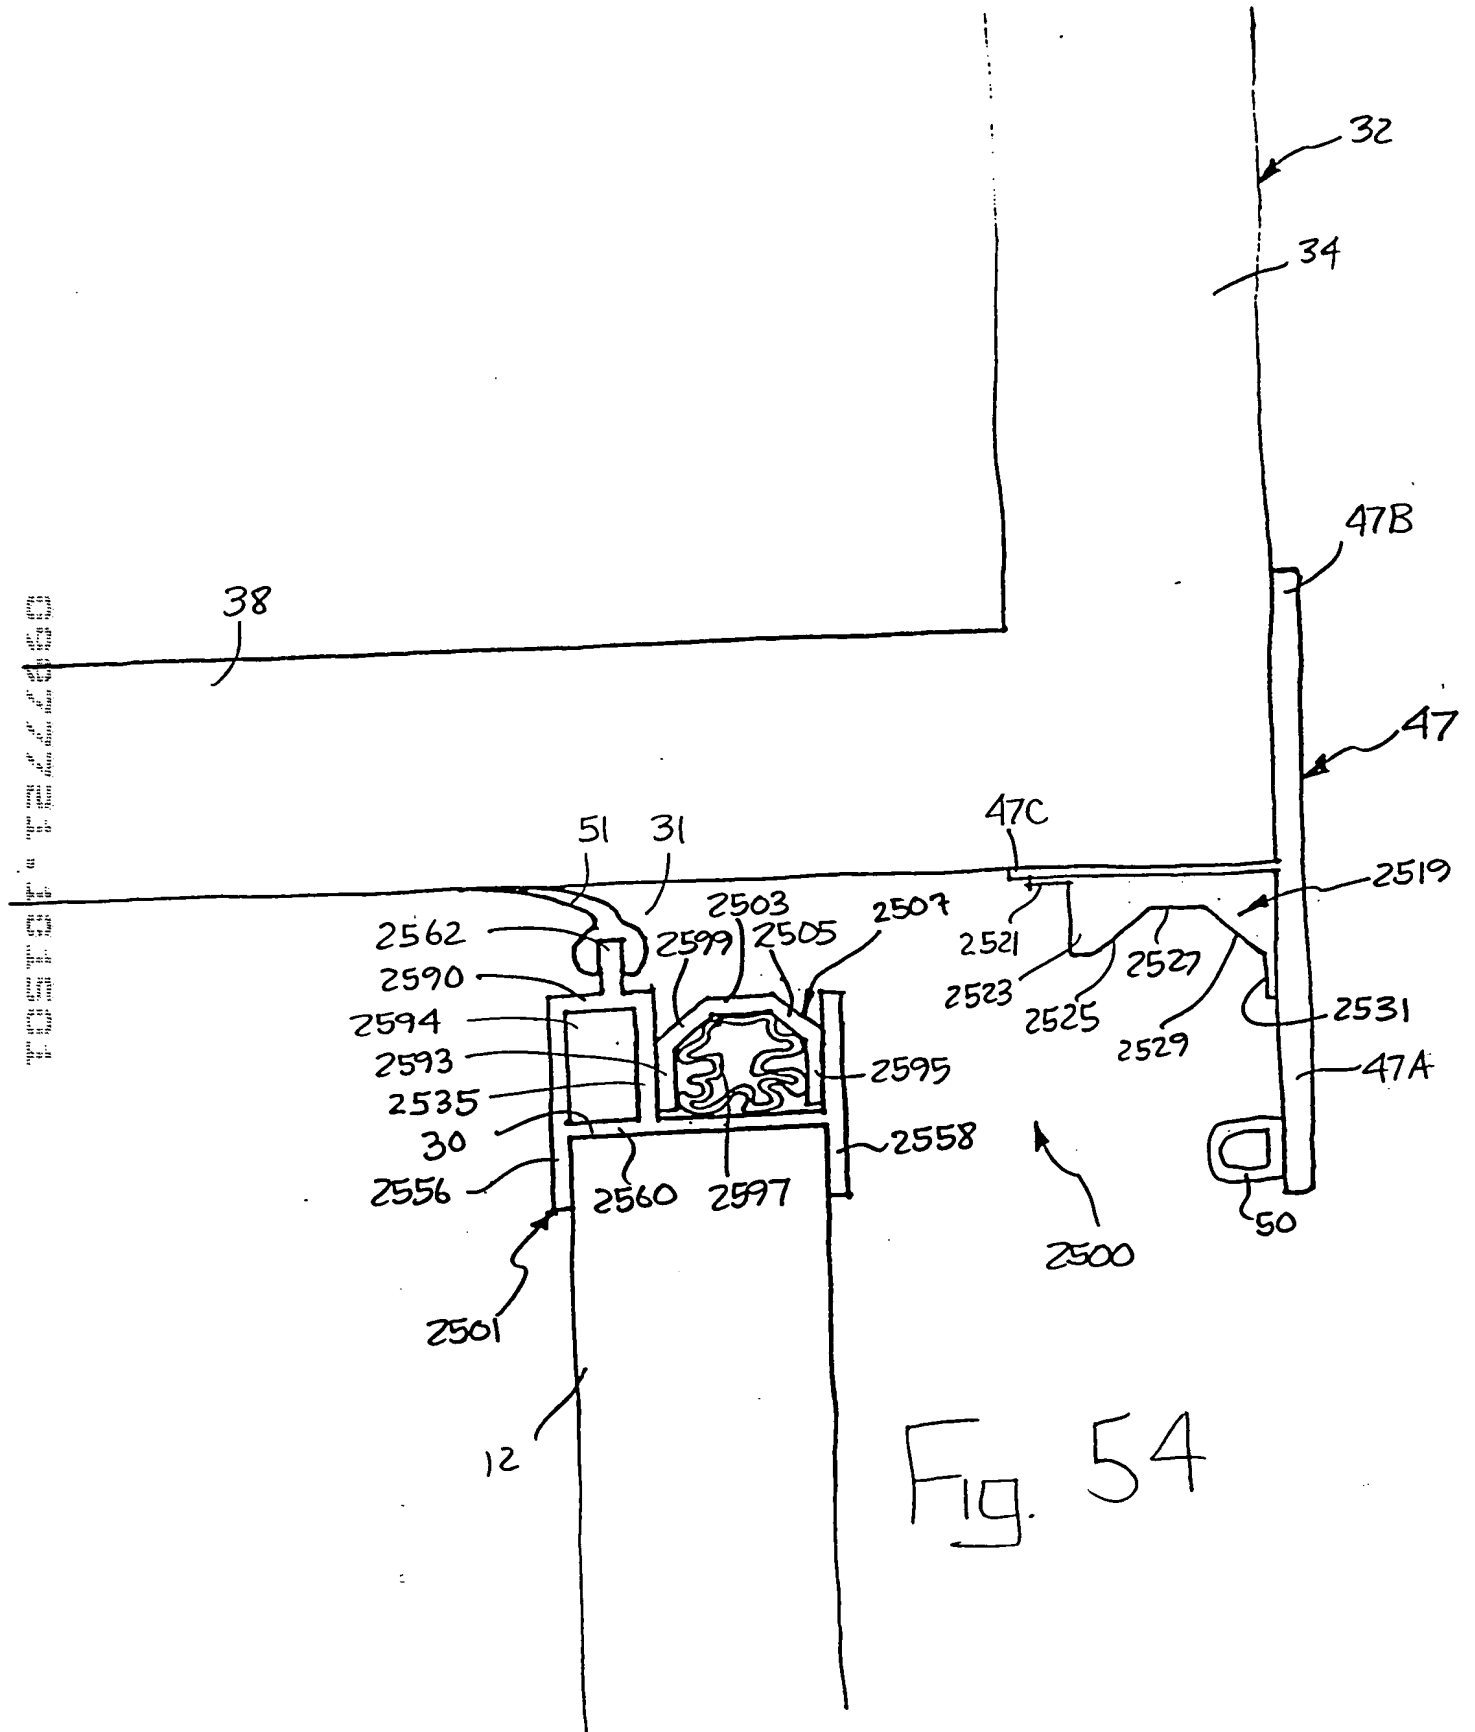

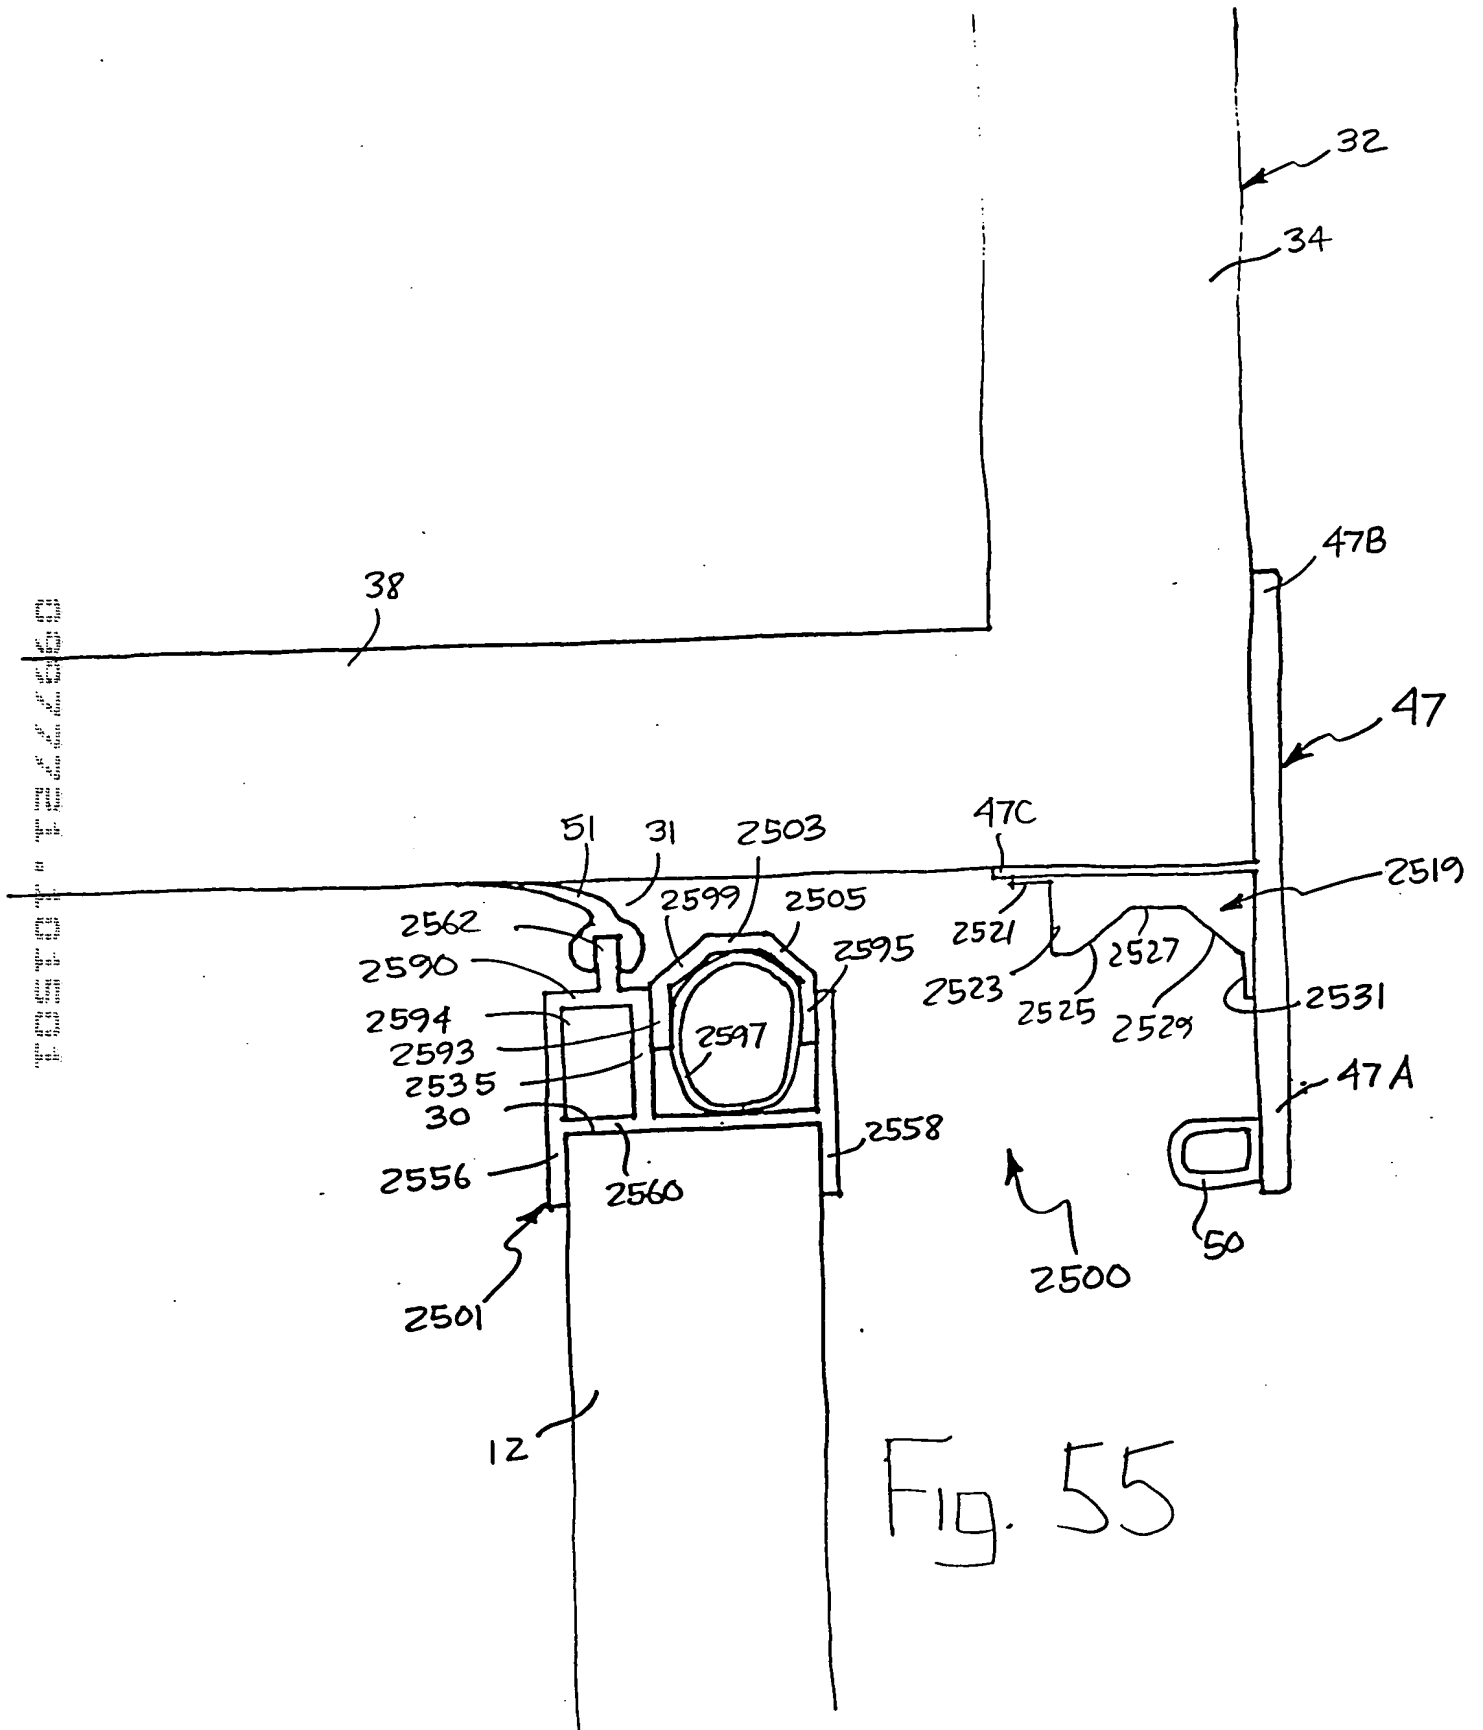

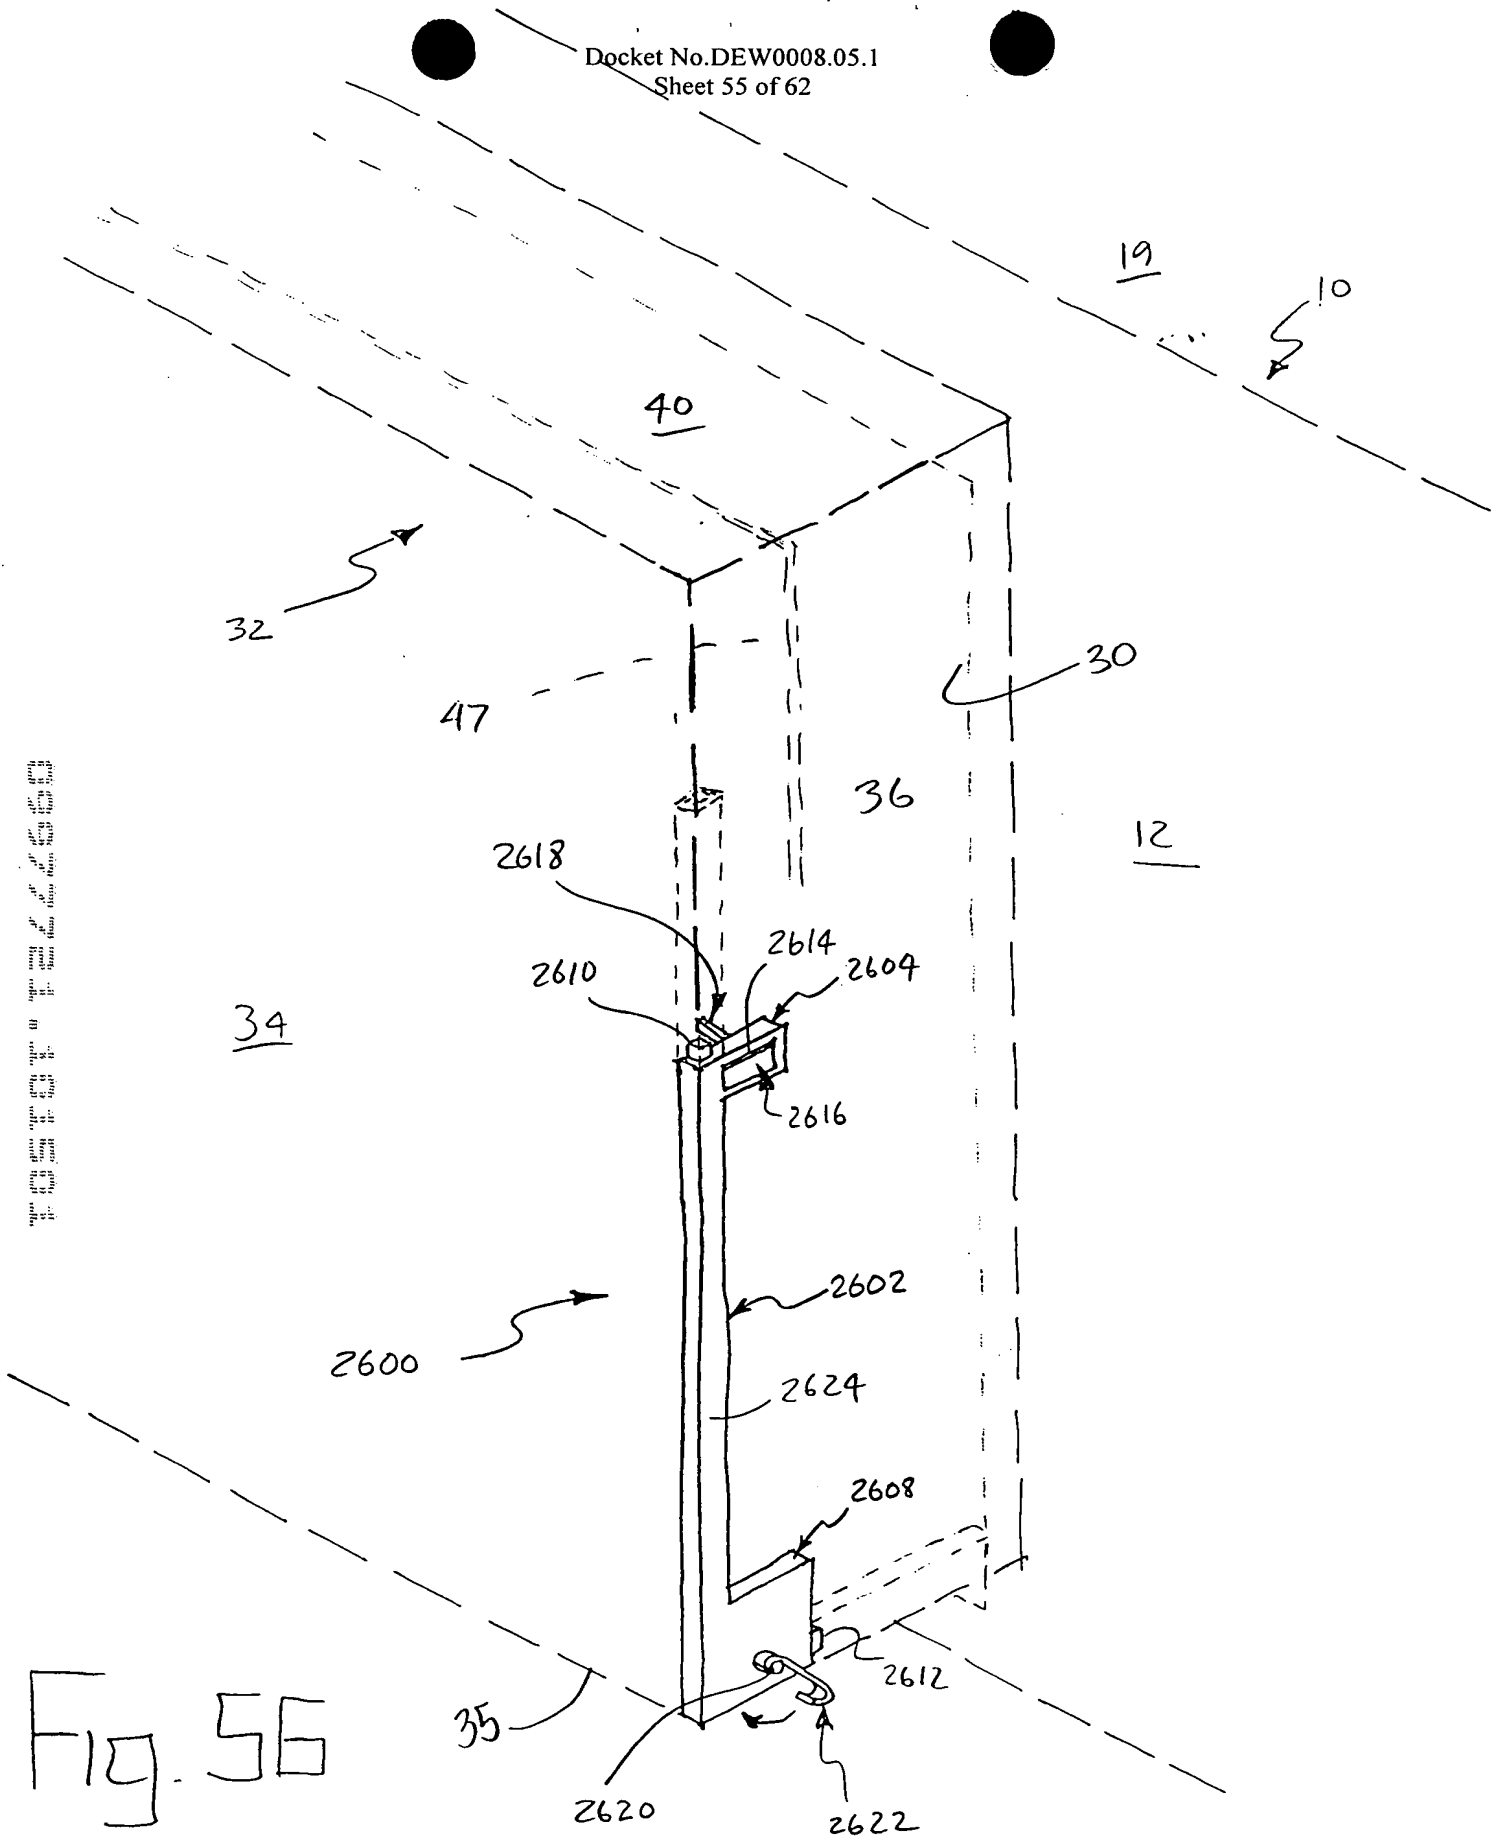




Fig. 57

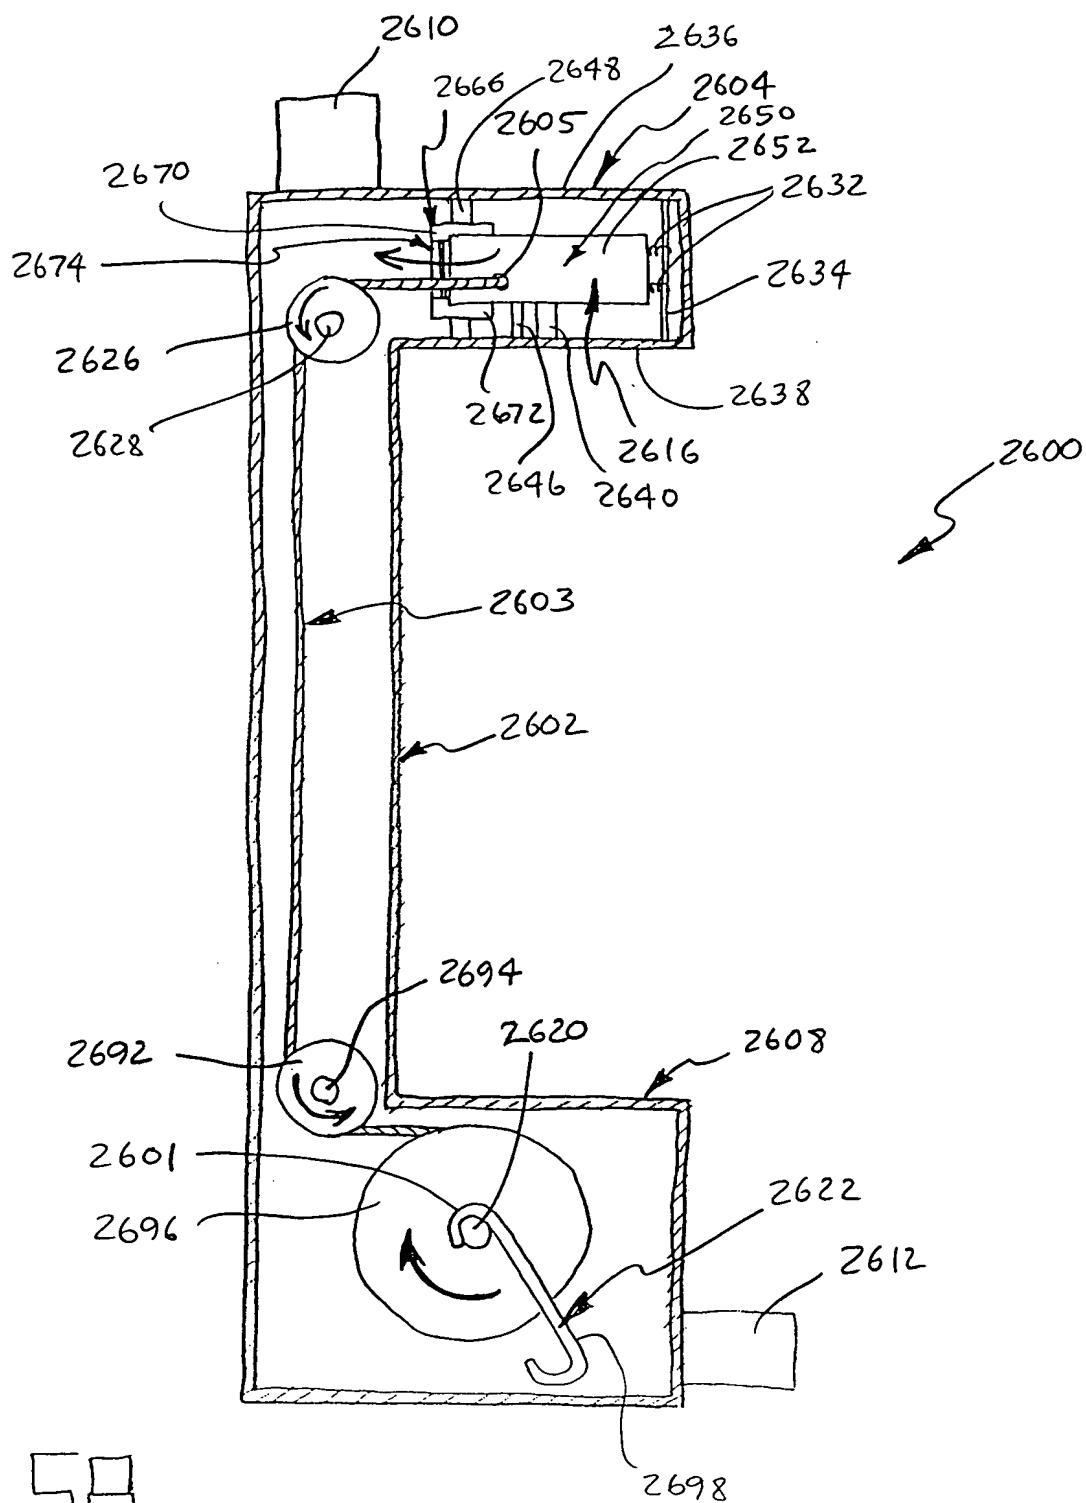


Fig. 58




Fig. 59

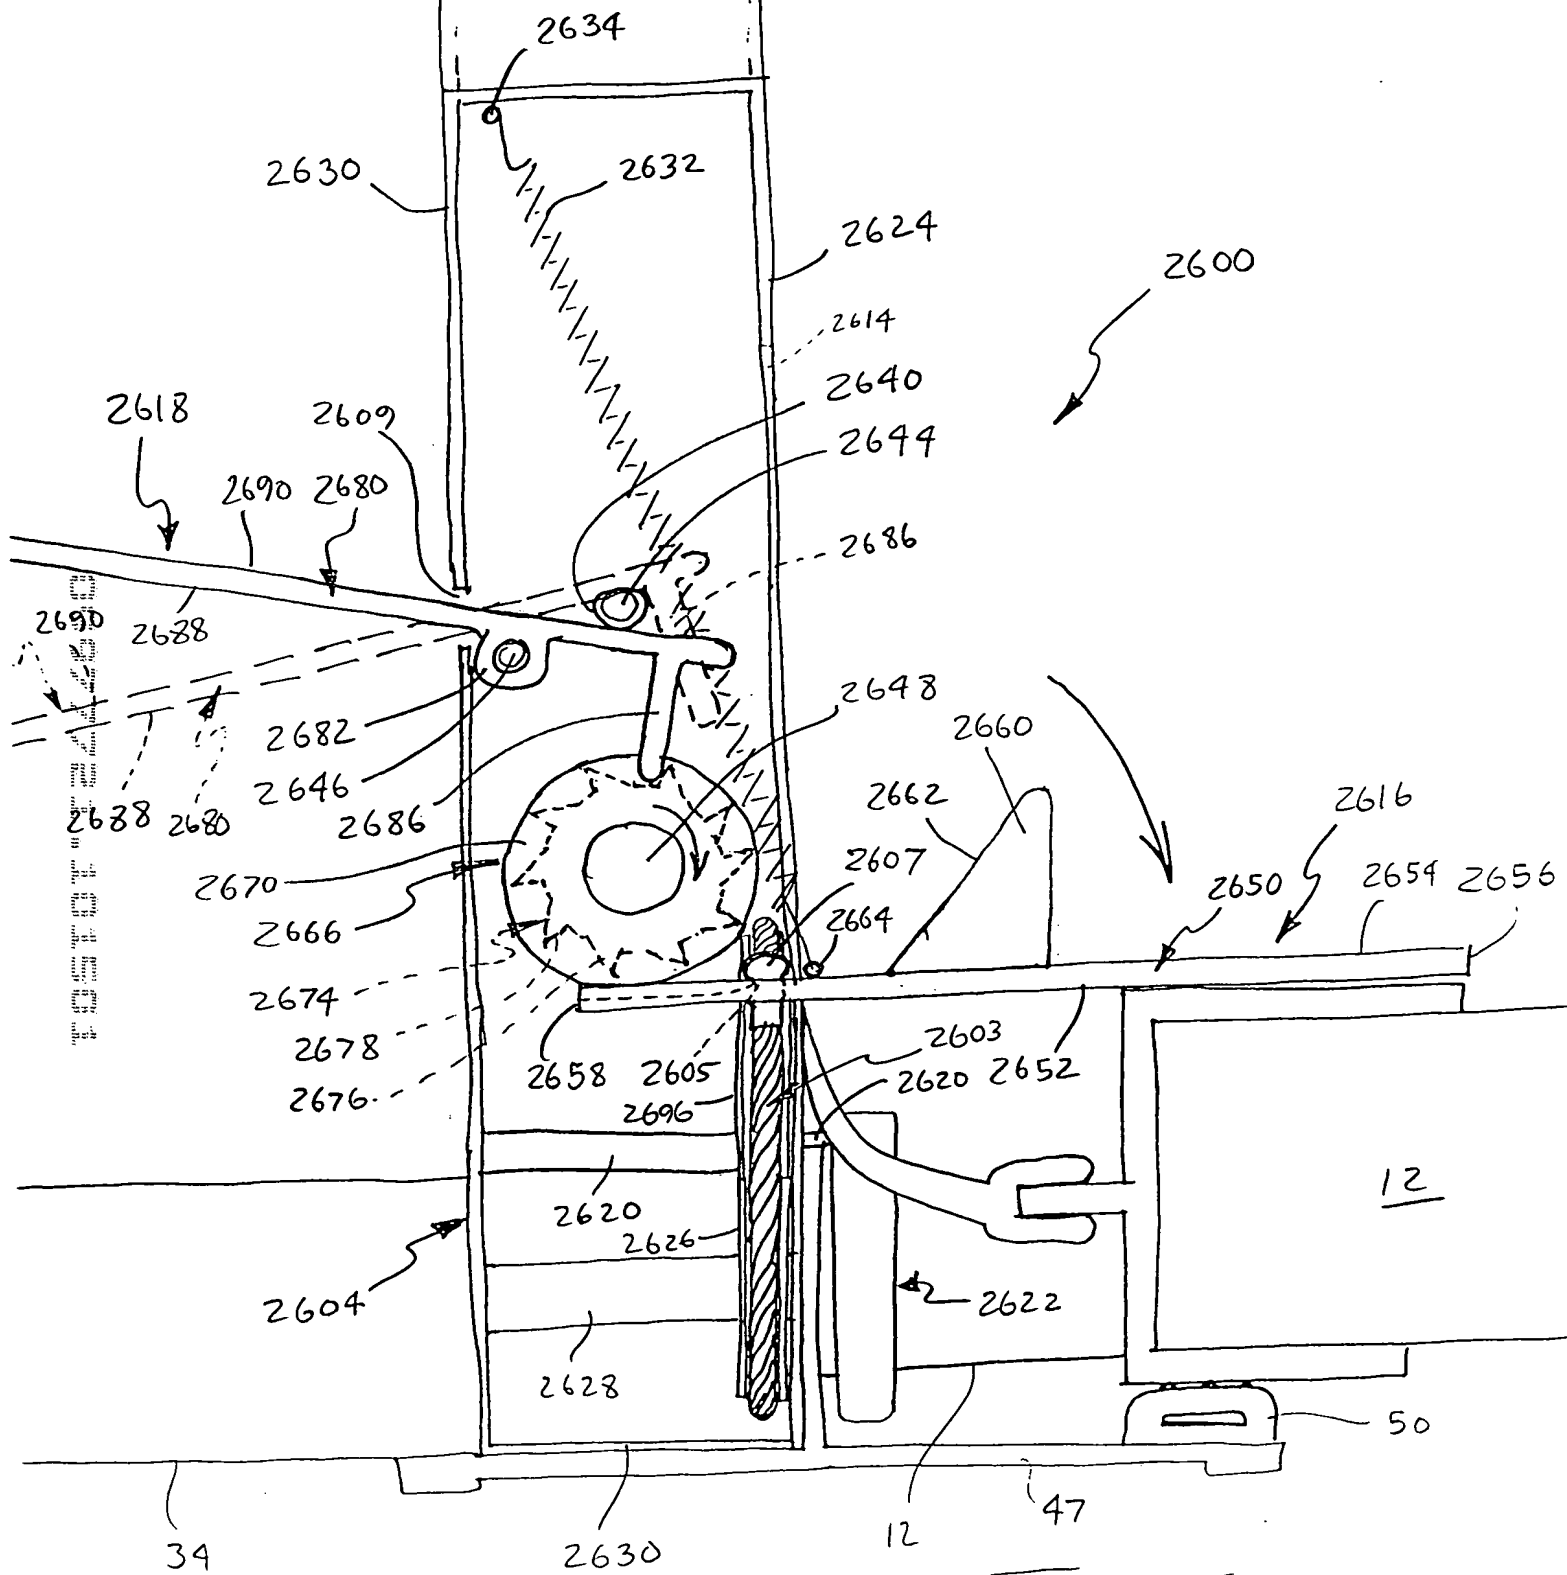


Fig 50




Fig. 51

32

50

47

2770

2764

2768

40

2712

2784

2766

2740

2715

2748

2746

2744

2716

2742

2778

2772

2774

36

2702

2780

2710

2706

34

2776

2760

2708

12

2720

2726

2728

2724

2730

2752

2756

2762

2714

2782

2750

2754

2722

2734

2736

2732

2738

35

2758

2786

2718

Fig. 62

FIG. 62 is a schematic diagram of a device 12, shown in a cross-sectional view. The device 12 includes a housing 32 and a central shaft 34. A cable 36 is connected to the shaft 34 and passes through a series of pulleys 2702, 2706, 2710, 2714, 2716, 2718, 2720, 2722, 2724, 2726, 2728, 2730, 2732, 2734, 2736, 2738, 2740, 2742, 2744, 2746, 2748, 2750, 2752, 2754, 2756, 2758, 2760, 2762, 2764, 2766, 2768, 2770, 2772, 2774, 2776, 2778, 2780, 2782, 2784, 2786, 2788, 2790, 2792, 2794, 2796, 2798, 2800, 2802, 2804, 2806, 2808, 2810, 2812, 2814, 2816, 2818, 2820, 2822, 2824, 2826, 2828, 2830, 2832, 2834, 2836, 2838, 2840, 2842, 2844, 2846, 2848, 2850, 2852, 2854, 2856, 2858, 2860, 2862, 2864, 2866, 2868, 2870, 2872, 2874, 2876, 2878, 2880, 2882, 2884, 2886, 2888, 2890, 2892, 2894, 2896, 2898, 2900, 2902, 2904, 2906, 2908, 2910, 2912, 2914, 2916, 2918, 2920, 2922, 2924, 2926, 2928, 2930, 2932, 2934, 2936, 2938, 2940, 2942, 2944, 2946, 2948, 2950, 2952, 2954, 2956, 2958, 2960, 2962, 2964, 2966, 2968, 2970, 2972, 2974, 2976, 2978, 2980, 2982, 2984, 2986, 2988, 2990, 2992, 2994, 2996, 2998, 3000.

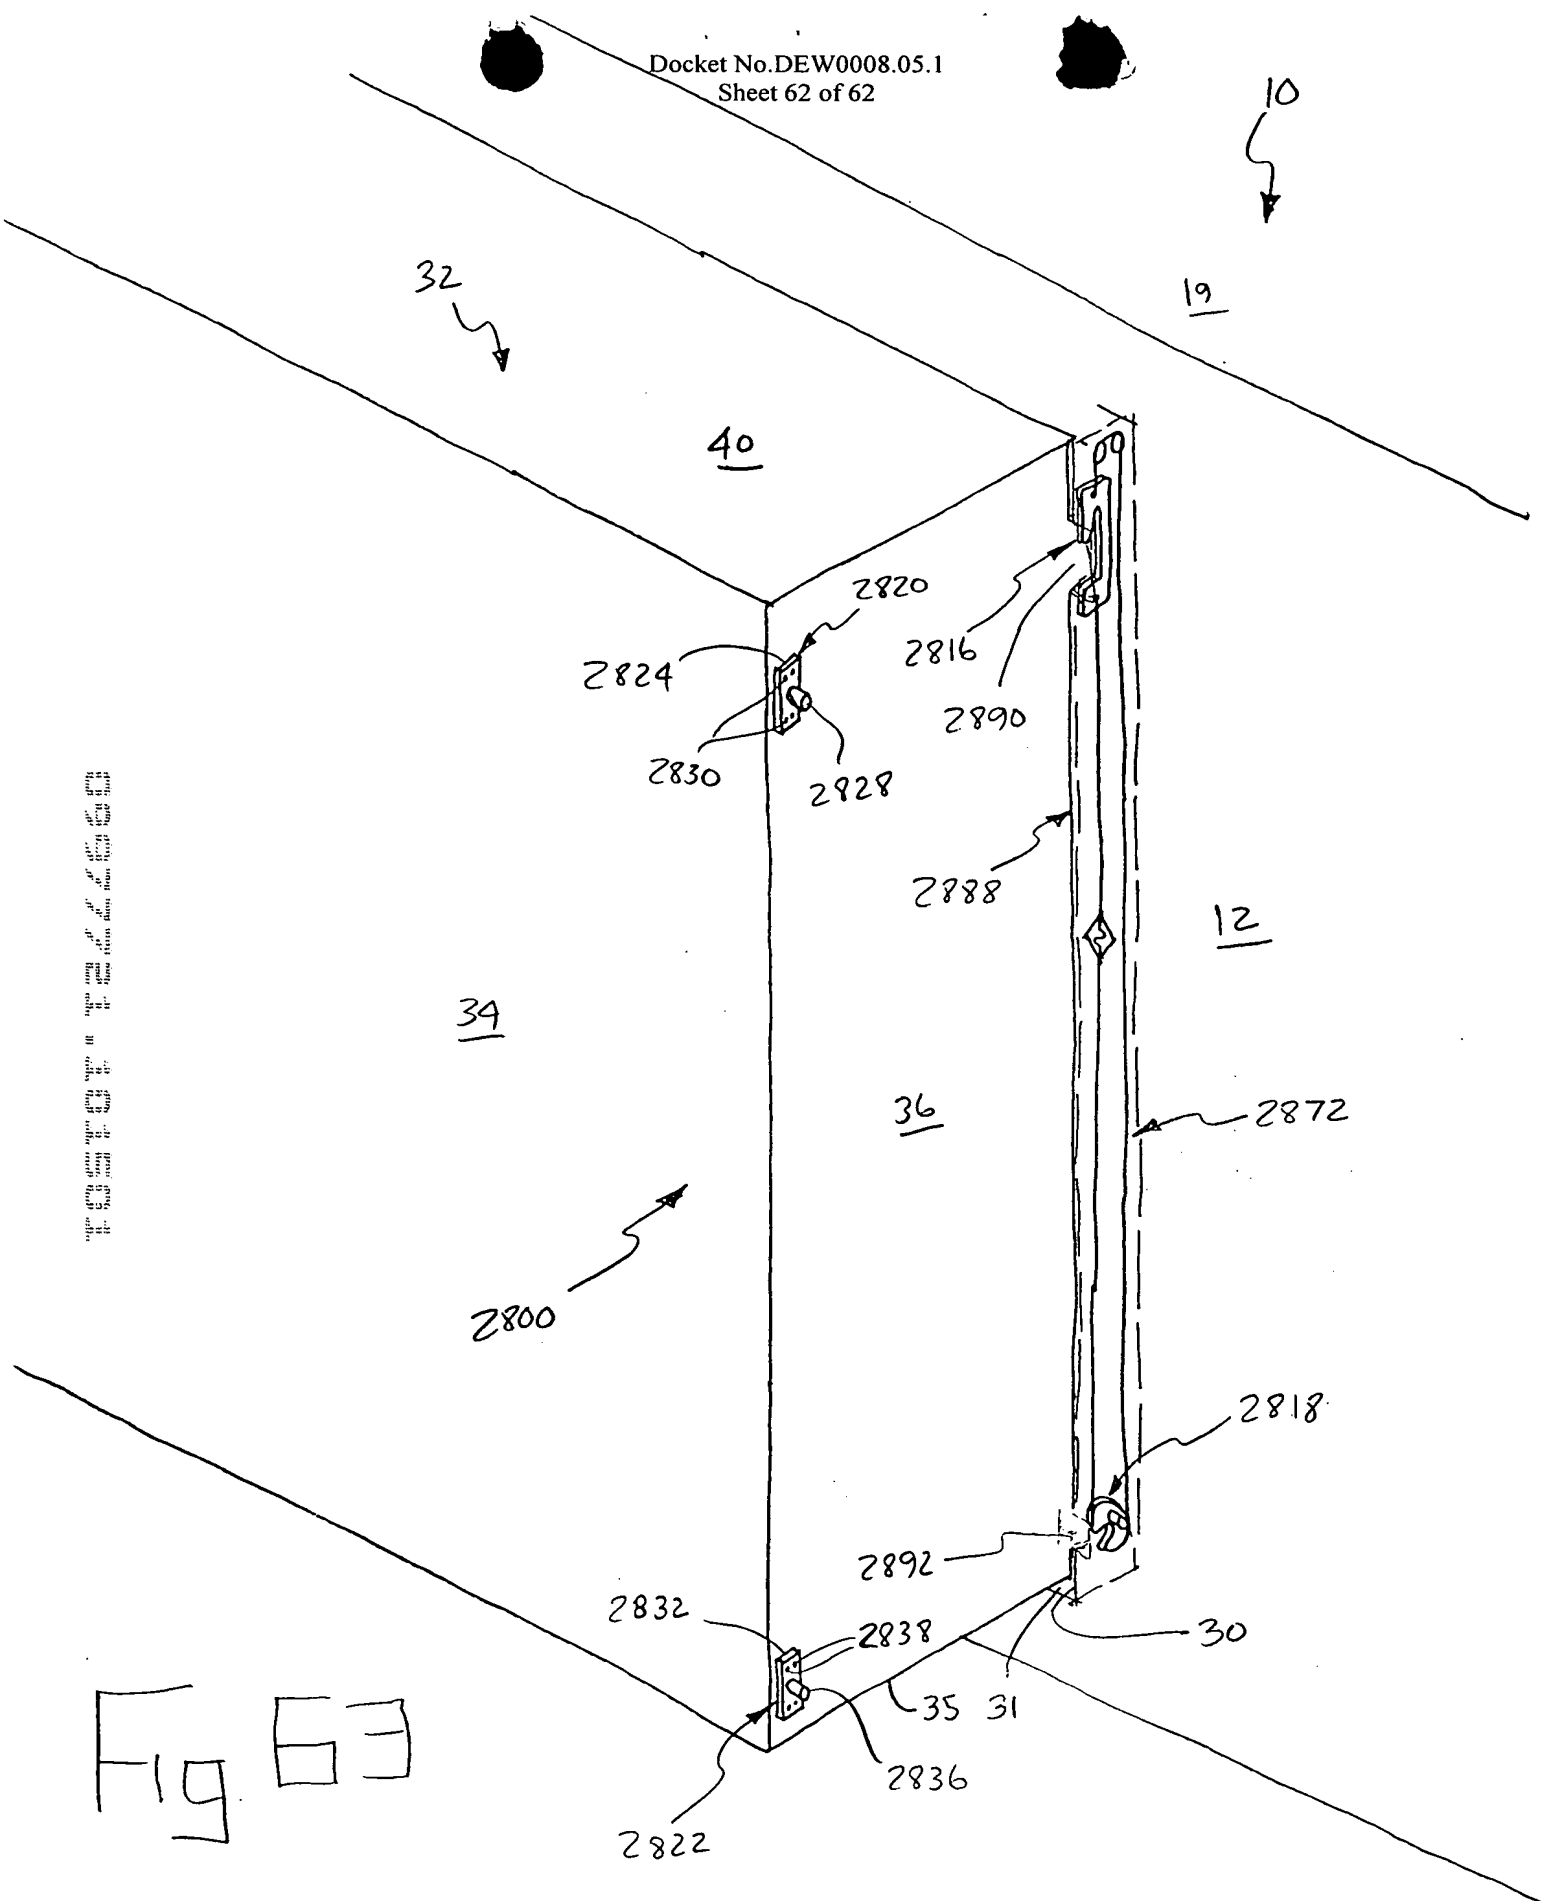


Fig 63